

Electric Fence 2021/2022



Fence advice


Customer Support Line +44 01572 722558



Our fence experts will be happy to help you with all your fencing problems. Is your electric fence unit flashing red and you cannot tell why? Is your fence suddenly without power and you cannot find the fault? We will find the solution together! For simple queries, it is best to send an e-mail to weidezaun@kerbl.com. If you have a more complex problem, please feel free to contact us by phone! Our professional fence construction partner is just what you need for the proper planning and construction of your complete fence system.

Top New Products 2021/22

You will find these and other new products in this catalogue.

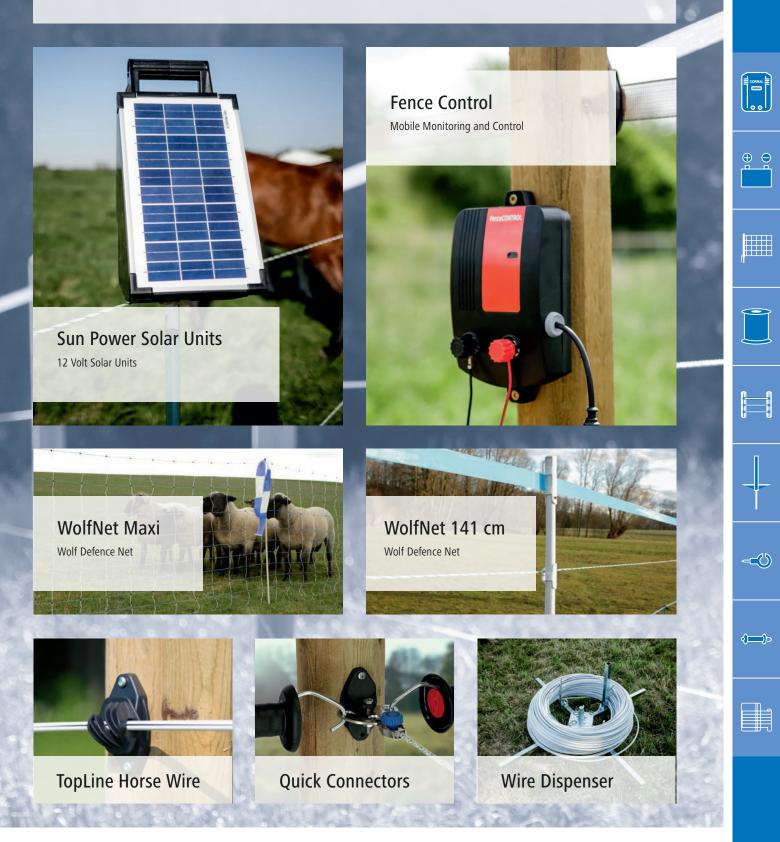





Fence Devices

230 Volt Power Supplies	13
12 Volt / 230 Volt DUO Units	21
12 Volt Battery Units	25
Solar Modules	30
Metal Battery Cases	31
9 V Battery Units	33
12 Volt Solar Units	36
Hobby Sets	40



Fencing Accessories

Electric Fence Batteries	42
Fence Testers	49
Connection and Grounding Accessories	50
Fencing Accessories	56
Warning Signs	57
Reels	58



Permanent Fencing

Fencing Wires	106 / 110
Wire Connectors	109
Permanent Fencing Accessories	112



Posts

T-Post System	117
Wooden posts	124
Recycled Posts	126
Fibreglass Posts	128
Plastic Posts	130
Metal Posts	136



Ring Insulators	140
Tape Insulators	142
Corner Insulators	145
Slit Insulators	146
Rope Insulators	147
Supplementary Insulators	148
Offset Insulators	150
Insulators with Metric Thread	152
Gate Handle Insulators	154

Netting

Sheep Netting	64
Wolf Defence Netting	75
Defensive Netting	80
Poultry Netting	82
Net Accessories	84
Net Gates	87
Small Animal Nets	88



Conductors

STAR Line	93
PROFI Line	95
CLASSIC Line	97
BASIC Line	99
Tape Connectors	100
Rope and Wire Connectors	101
Polywires	104

Gate Systems

Gate Handles	156
Flexible Gate Systems	160

Panels and Racks

Pasture Gates	164
Paddock Panels	168
Fodder Racks	172

You will find these symbols in this catalogue.

Explanation of our packaging and sales units.

OU	Items/pack unit	€
1 blister pack	Pack of 6	Price per pack
1 pouch	Pouch of 10	Price per pouch
12 items	Pouch of 12	Price per item
1 pack	Pack of 30	Price per pack
40 items	Pack of 40	Price per item
1 box	Box of 5	Price per box
8 items	Box of 8	Price per item
1 display	Display of 10	Price per display
6 items	Display of 6	Price per item

_____**_**

OU Order unit for retail Always order a multiple of the number stated (e.g. OU = 12

items, order in lots of 12).

Items/pack unit No. of items per order unit/pack unit

Price/€ Price per OU

If the OU column is empty or missing, the price is per item. All prices provided are the manufacturer's recommended retail prices and are inclusive of VAT.



Pack units

Possible pack units for 1 OU.



Pallet No. of order units (OU) per pallet.



Forwarder

All items marked with this icon must be shipped by freight carrier due to their scale/size or weight. This means that additional, separate freight costs are required! Optimise freight costs by ordering entire pallet units.

Animal types

You will find animal icons on many products. These indicate usage for certain animal types.



Better product presentation with videos, 360° photo player and downloads



Product videos

You can now find out even more about our products in appealing, informative and attractive product videos.

All features and functions are shown live in action. We also present areas of use that some people may previously have been unaware of. Explanatory and installation videos facilitate operation and clarify features. In this way, we are trying to answer questions on products in advance and also provide you with real added value.



360° photo player

We are also offering complete 360° views of selected products in addition to our high-resolution professional product photos.

This gives you the option of viewing the product in advance from all sides and in extreme close-up, in high resolution and in sharp focus. Although you still cannot touch it, you can get a much better, more realistic feel for the product.



Product images

While we can only show you basic illustrations of a product in our catalogue, we can also provide you with digital copies of further photos showing detailed views and usage, for example.



-=℃

✐

This is how an electric fence system works!

An electric fence system consists of:

A) An electric fence unit that generates regular electric pulses.


B) One or more wires that transport electricity (although these do not necessarily have to form a closed loop).

C) Insulators that isolate the electricity from earth.


D) Permanent or mobile posts that can be used as required.

E) The earth of the electric fence unit, which should be buried as deep as possible in damp soil.

If the animal touches the wire, an electric circuit is closed, i.e. the electric current flows through the animal and the earth back to the unit. The animal consequently receives an unpleasant, though harmless, electric shock and retreats. An electric fence system of this kind is used successfully to pen animals in and also to keep other animals out.

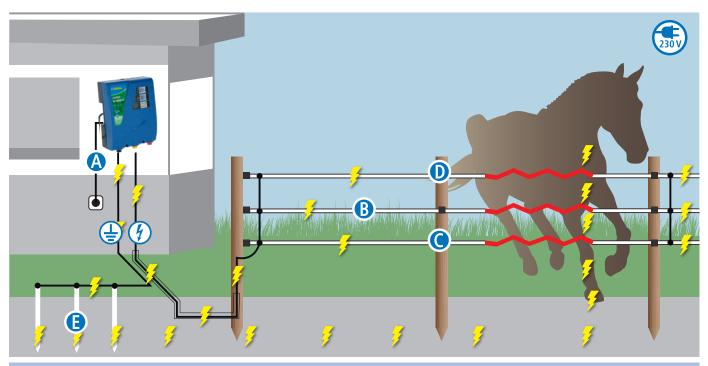

Make sure there are at least 2500 V at every point of the fence.

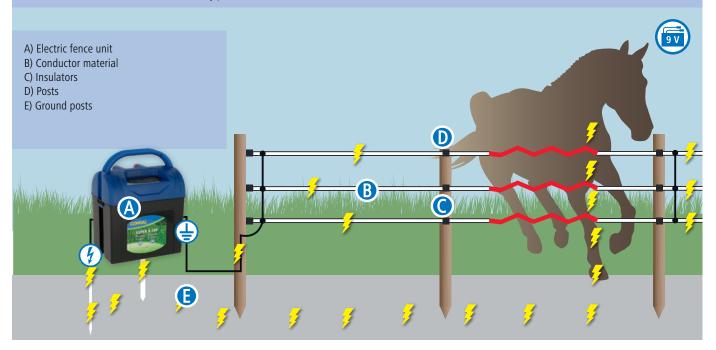

Explanation of technical terms

Earth

The earth is an important part of the power circuit. To ensure the current can flow from the earth back to the unit unhindered, the earth rod must have the best possible contact with the soil (dry earth barely conducts electricity). Therefore, when inserting the earth rod, choose damp places where possible, or choose earth rods that are sufficiently long to reach deeper, damp layers of earth.

Shock voltage and pulse energy

The peak of an electric pulse generated by an electric fence unit is known as shock voltage. A high voltage is needed to create a conductive 'channel' between the fence wire and the animal's body. The minimum voltage is around 2500 V. For animals with a thick coat, we recommend 4000 V minimum. The current (pulse energy) can now flow through this 'channel'. Therefore, the shock effect depends on the amount of pulse energy (voltage itself does not hurt!). The more insensitive the animal is, the greater the energy needed to secure or scare it. The demand for pulse energy also increases with the length of the fence and its load (e.g. vegetation). The more energy a unit emits, the higher its energy consumption. We therefore advise care when choosing your pulse energy, especially with battery-powered units.

Fence Resistance

as well as sufficient impulse energy, you also need highly conductive fence material to achieve the maximum shock possible and to make sure that there is minimum loss in the energy delivered to the animal, and no energy fade beforehand. The conductor resistance is a measure for assessing the fence material. It is specified in Ohm/meter. The smaller this value, the better the material conducts. The longer the fence, the better must be the conductivity of the chosen material. The best materials have a resistance < 1 Ω/m ; poorer materials exceed 4 Ω/m . Investigations have shown that, in addition to very good conductivity, which is achieved mostly by copper wire, long-term durability (e.g. by means of stainless steel wires with poor conductivity) is decisive for the security of an electric fence. Here, our proven TriCOND material provides the necessary compromise, and is renowned for outstanding conductivity combined with extended durability.

What kilometre figures should you base your decision on?

Kilometre figures are often highly theoretical values that are based on the best possible conditions (wire conductivity, connections, insulation status, ground conditions, earthing) in the fence system. These conditions change constantly, however, due to the influences of weather. It is therefore important to achieve the minimum protective voltage of 2,500 Volt at each point of the fence system in all conditions.




-**-**()


✐

max

The fence device check

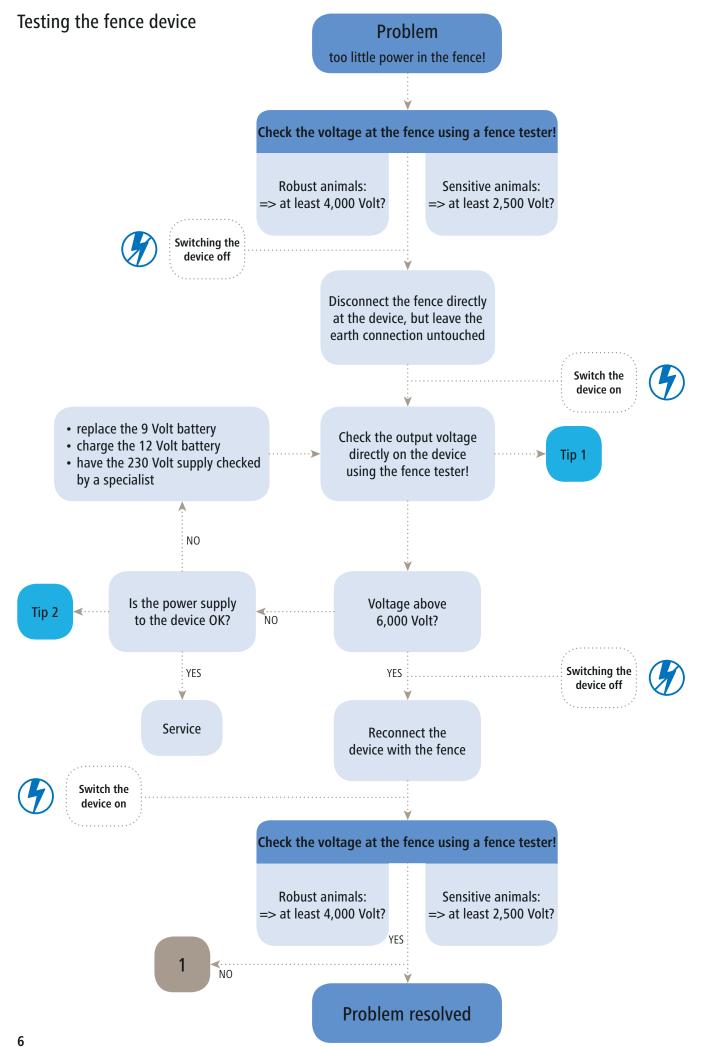

The fence supply line & earthing check

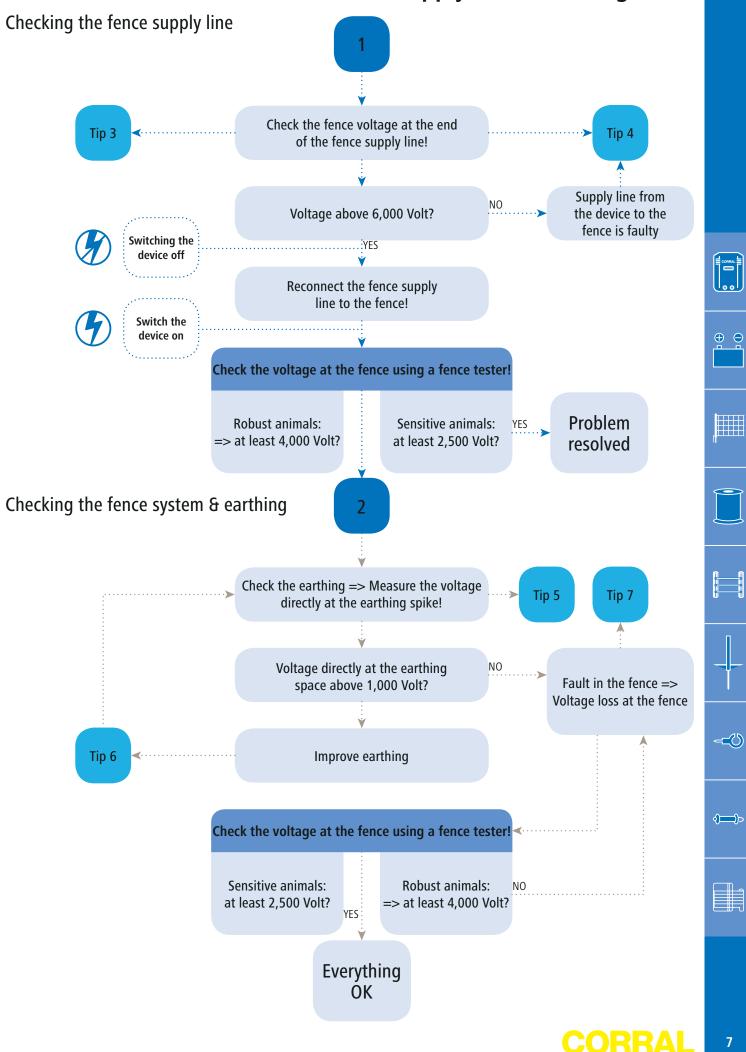

General tips

Useful tips from our experts

Tip 1

- 1. Remove the knurled nuts from the earthing and fence output
- 2. Contact the earth output on the device using the fence tester's earthing rod
- 3. Contact the fence output on the device using the fence tester



Tip 3

- 1. Switch the device off
- 2. Disconnect the fence supply cable at the fence
- 3. Switch the device back on
- 4. Using the fence tester, measure the voltage at the end of the fence supply line cable




Tip 5

How do I measure voltage directly on the earthing rod?

1. Short-circuit the fence wire approximately 10 m away from the device earthing using iron rods

2. Check the voltage directly at the earthing rod using a digital voltmeter

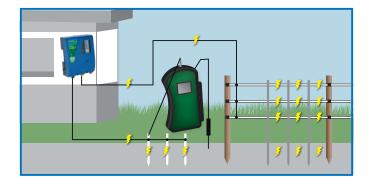

Tip 2

- 1. 9 volt battery: flashing red => battery is flat
- 2. 12 volt rechargeable battery: flashing red => battery is flat
- 3. 230 Volt mains power: LED not flashing => no power supply

Tip 4

1. Underground fence supply line

The underground cable is faulty => use an underground cable resistant to high voltages

2. Underground fence supply line

Check the fence supply line for diversions / interruptions (e.g. is the supply line contacting the building, e.g. ivy, guttering, shrubbery, etc.)?

Tip 6

- 1. Insert earthing rods to a depth of at least 1 m away from the building into damp soil
- 2. Insert multiple earthing rods at intervals of at least 3 m and connect them
- 3. Earthing rods must be made of non-rusting material, e.g. stainless steel, or must be galvanised

Tip 7

- 1. Vegetation on the fence => remove it!
- 2. Conductive material lying on the ground => tie / bind it up
- Poor conductive material => replace with material that has good conductive properties (< 1 Ohm/m)
- 4. Conductive material is knotted => use stainless steel ties
- 5. Insulator breaks through => replace with new insulator
- 6. Broken metal conductor wires => replace conductive material
 7. Improve conductivity => connect conductive material series with each other vertically at intervals of around 200 m

My Manual

www.my-manual.eu



Please pay close attention to the version number when entering the item number of your device.

CORRAL

Choosing your electric fence unit

230 V power energisers – the FIRST CHOICE if a mains socket is available.

These units have an unlimited protection period. They are available in all of the necessary power classes and are they best means of delivering the energy required (0.5 Joule up to 14.5 Joule output) on long fences or fences with vegetation, or for very robust animals. The higher energies of course do not harm the animals. All fence devices comply with applicable safety standards. If mobile use is intended, e.g. at tournaments, on trail or distance rides or simply on frequently changing pastures where there is no 230 Volt power supply available, you must resort to a battery-powered unit. For fences with heavier vegetative growth, 9 Volt compact solar units are inadequate and 12 Volt units must be used.

12 V battery-powered units – strong performance even on fences with heavier vegetation.

12 V battery units are ideal for very robust animals, long fences and/or fences with vegetation if no 230 V connection is available. The discharge energy is comparable to that of power energisers (output approx. 0.5 to 5 joules). Rechargeable 12 V wet batteries are used as the power source, which must be recharged every 2 - 4 weeks or so depending on the type of device, power requirements and battery type. Solar modules, which convert solar energy into electricity and therefore constantly top up the 12 V battery, are a good add-on.

12/230 V DUO units – maximum flexibility combined with powerful output energies!

Units of this type combine the unlimited security time of the 230 V units with the mobility of powerful 12 V units. A 12 V cable and 230 V adapter are included.

9 V dry battery units – the ideal units for smaller fences and paddocks!

9 V battery units are suitable for shorter fence lengths without vegetation. They are highly mobile and significantly lighter than 12 V units. The 9 V battery runs for a few months and can even cover an entire pasture season depending on the operating time, battery type and size (expressed in Ah – the more Ah (ampere hours), the longer it runs for). Once discharged, it cannot be recharged. 9 V units (even if these can also be operated with 12 V batteries) are weaker than 12 V units. 9 V units in this instance typically deliver approx. 0.15 to 0.35 joules. High-impact 9 V units can deliver up to 0.55 joules.

Compact solar units

Compact solar units from the CLASSIC range – similar to 9 volt devices for smaller fences without vegetative growth, or: AKO SunPOWER from the EXPERT range = extremely powerful, mobile compact solar units. Mono-crystalline solar modules in combination with our high-performance solar fence devices are able to supply power to fences which are many kilometres in length. Even after a whole week without direct sunlight, these fence devices still have sufficient power to supply your fence with sufficient current. These special devices are outstandingly suited for fencing relatively large areas. Sufficient voltage is supplied everywhere along the fence, without the requirement for a socket anywhere nearby!

The 12 volt AGM battery is integrated, and is constantly charged via the solar module built into the housing. If the battery has to be topped up, it can be recharged using the 230 volt mains adapter supplied.














How many wires at which height?




Electric Fence for Dairy Cows Recommendation: 10 mm tape, polywire



Electric Fence for Bulls, Cattle and Suckler Cows with Calves Recommendation: 10 mm tape, polywire



Electric Fence for Big Horses Recommendation: rope or tape up to 40 mm



Electric Fence for Jumping Horses Recommendation: Rope, Wide Tape up to 40 mm


 \oplus Θ

-**-**()


♦

11


When keeping domestic pigs, an exterior, wild animal density fence (metal hinge joint fencing) is required in addition to the interior electric fence!




Electric Fence for Small Horses Recommendation: 10 mm tape, rope




Deterring Wild Boars Recommendation: Wild animal deterrent net, 10 mm tape, polywire




Electric Fences for Small Dogs Recommendation: Hobbyset, polywire




Electric fence for sheep Recommendation: sheep netting, wire, polywire




Electric Fences for Hens Recommendation: poultry netting, polywire




Electric Fences for Cats Recommendation: Hobbyset, polywire




Electric Fences for Goats Recommendation: electric wire, polywire




Electric Fences for Geese Recommendation: poultry netting, tape, polywire




Electric Fence to deter Herons Recommendation: Hobbyset, polywire



Electric Fences for Pigs Recommendation: 10 mm tape, polywire



Electric Fences for Tall Dogs Recommendation: Hobbyset, polywire



Electric Fence for Rabbits Recommendation: rabbit netting, polywire


The specifications like fence heights are only approximate and need to be adapted to the animal species you wish to fence in. Please observe regional regulations if applicable!





Power Stations for Highest Fence Requirements

Mains operated energizers (230 volts) have no limit in tending animals. They come in all performance categories and are the best solution for providing long fence lines with the necessary energy. Even if there is heavy vegetation they are able to provide the fence line with sufficient energy.



(not included)



Ground Rod with T-profile 1 m item no. 44615

Ground Rod with T-profile 2 m item no. 441369



Underground Cable, ø 1,6 mm (44818, 44921, 44922)

Underground Cable, ø 2,5 mm (44819, 44920)



Lightning Choke item no. 44601



Corral Warning Sign item no. 59623



no. 441229





Wire Terminal (441225) is perfect for connecting the conductor to your underground cable



Corral Super N

The smart Corral 230 volt power supply line – extremely powerful, for very robust animals and for very long fences even with vegetation.

- Delayed shock strength adjustment makes touching the fence safer for people and animals
- An alarm continuously monitors the fence, triggering an alarm and slowing the pulse sequence if the fence is touched for a longer period
- Much safer and more energy efficient in comparison to conventional devices and more secure for animals even when vegetation is thick thanks to the extremely high fence voltage
- With two fence outputs (high/low)
- Microprocessor controlled










Corral Super N 10000 D

- extremely high-capacity power supply unit with intelligent power adjustment
- for robust animal species such as cattle, sheep, horses and for deterring wild animals; for very long fences with heavier vegetative growth



Corral Super N 6000 D

- high-capacity power supply unit with intelligent power adjustment
- for robust animal species such as cows, sheep, horses and for deterring wild animals; for long fences with vegetative growth

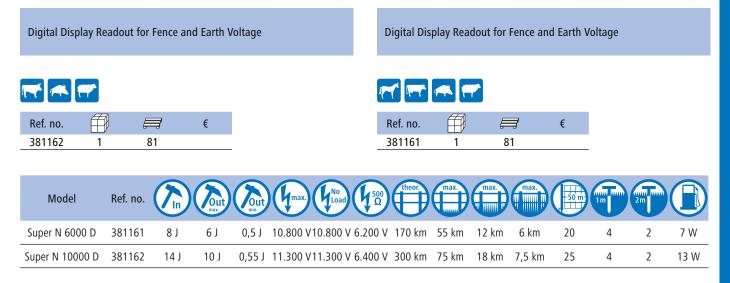

Corral Super N

• fitted with Corral pulse technology – much safer, more energy efficient and more current conductance even when vegetation is thick, thanks to the extremely high fence voltage









Corral Super N 15000

- ultra high capacity 230 V power supply
- for long fences with heavy vegetation
- designed for robust species such as cattle, sheep, horses and deterring wild animals
- the fence is constantly monitored by an alarm function, which triggers an alarm and slows the pulse sequence if the fence is touched for an extended period of time
- very low power consumption in normal operating mode



Corral Super N 10000

- extremely powerful 230 volt power supply
- for long fences with heavy vegetation
- designed for robust species such as cattle, sheep, horses and deterring wild animals
- the fence is constantly monitored by an alarm function, which triggers an alarm and slows the pulse sequence if the fence is touched for an extended period of time
- very low power consumption in normal operating mode



Corral Super N 5000

- very effective 230 volt power supply
- can be used with medium to heavy vegetative growth
- our all-round device for all types of animal

		r output volta ower consum			2-colour LED lights for output voltage, earthing status and power consumption					2-colour LED lights for output voltage and earthing status					
										r F					
Ref. no.	Ð	Ħ	€		Ref. no.	Ø	Ħ	€		Ref. no.	Ø	Ħ	€		
381167	1	108		_	381165	1	108			381160	1	81			


Model	Ref. no.			Out min.	(fmax.	K oload	(J 500)	theor.	(max.	max.	max.	50 m		2m	
Super N 5000	381160	7 J	4,8 J	0,55 J	10.000 V	9.200 V	6.800 V	140 km	45 km	8 km	4,5 km	15	3	1	7 W
Super N 10000	381165	14 J	10 J	0,55 J	11.300 V	9.600 V	6.400 V	300 km	75 km	18 km	7,5 km	25	4	2	13 W
Super N 15000	381167	20 J	14,5 J	0,6 J	10.200 V	9.500 V	7.000 V	350 km	100 km	22 km	12 km	30	5	3	18 W

Corral Super N

Our all-round devices for demanding applications • can be used with light to medium vegetative growth





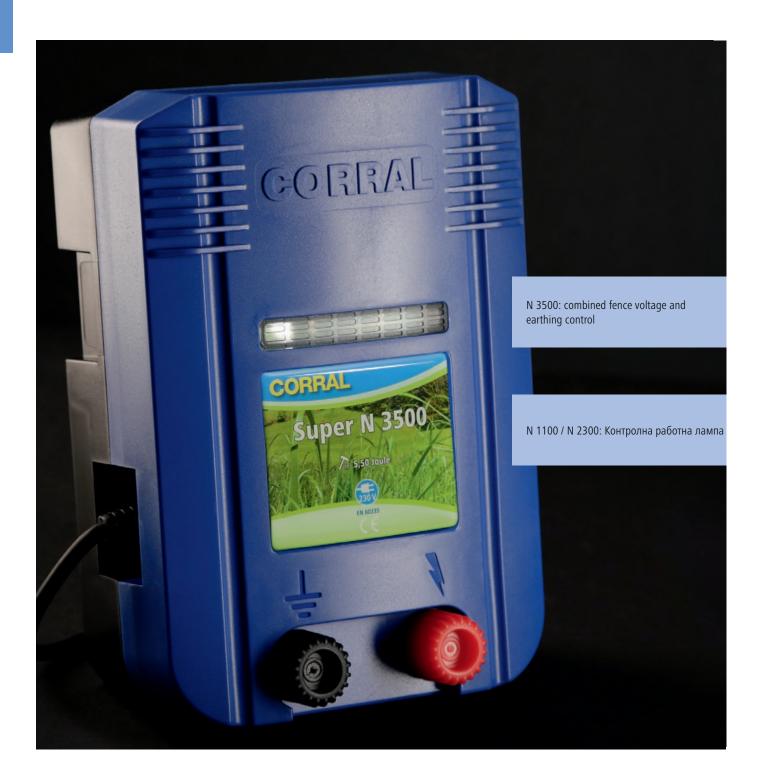



Corral Super N 3500

- extremely powerful 230 volt power supply
- can be used with light to medium vegetative growth
- our all-round device for demanding applications - ideal for horses, cattle, sheep and goats



Corral Super N 2300

- very effective 230 volt all-round power supply
- for short fences and low vegetation
- universally suitable for standard fences
- ideal for horses, cows, and chickens



Corral Super N 1100

- effective 230 volt power supply
- for short fences and low vegetation
- · ideal for small horse paddocks

combined optical earth control via indicates a fault)		Function Indicator LED					Function Indicator LED						
	1				* ***					r) (r			
Ref. no.) 🚍	7	€	Ref. no	o.) 📮	7	€	Ref.	no.	Ð		€
381462 1	160)		38146	1 1	16	50		3814	60	1	160	
Model	Ref. no.		Cout	(fmax.)	K o Load	(h 500)	theor.	max.	(max.	max.	50 m		
Super N 1100	381460	1,6 J	1,1 J	10.900 V	9.000 V	3.400 V	35 km	10 km	2 km	1 km	3	1	5 W
Super N 2300	381461	3,5 J	2,3 J	11.000 V	10.000 V	5.100 V	70 km	17 km	5,5 km	2,2 km	6	2	6 W
Super N 3500	381462	5,5 J	3,5 J	11.000 V	10.000 V	5.700 V	90 km	20 km	6 km	2,5 km	9	3	7 W





12 V / 230 V DUO Units

Two power input options available - 230 V mains supply or 12 V battery units. That means the unit can be used for permanent fencing with 230 V mains supply and also for mobile fencing with 12 V batteries. Devices include the 12 V connection cable with stainless steel clamps, 230 V mains adapter, fencing and ground connection cable. The housings are protected against splash water and are therefore suitable for use outside.

- · latest electric fencing technology microprocessor controlled
- optimised consumption thanks to energy saving mode
- deep discharge protection with 12 V operation



230 volt Power Pack

Included:



(AKO268739)

12 Volt Connector Cable Fence connection cable

(441603)




Earth connection cable (44604)



Recommended accessories:

(not included)

(371023)



Ground Rod with round profile item no. 44619



Underground Cable, ø 2,5 mm (44819, 44920)

Underground Cable, ø 1,6 mm (44818, 44921, 44922)



Metal Battery Box item no. 44656




12 volt, 88 Ah AGM battery item no. 442064









• ideal for DUO and hobby units (available as accessory)

Ø	€
1	CHINE R
	1

12 V / 230 V DUO Units

Corral Super NA

- optimised consumption thanks to energy saving mode
 deep discharge protection with 12 V operation
 microprocessor controlled

- plug connector with screw fuse
 solar option possible connect directly to the 12 Volt battery







12 V / 230 V DUO Units





Corral Super NA 200 DUO

- 12 V / 230 V DUO unit with high output
- for normal fence systems with low vegetation
- solar support possible
- with On/Off switch

recommended solar module: item no. 375151 (15 watts)



Corral Super NA 100 DUO

- 12 V / 230 V DUO unit with effective output power
- for short fences without vegetation
- solar support possible

recommended solar module: item no. 375151 (15 watts)




Fence control LED and separate battery warning indicator


Included in delivery: 1 x fence unit, 1 x 230 volt power pack (371023), 1 x 12 Volt connection cable, 1 x fence connector cable, 1 x ground connector cable

€

Function control LED and optical battery warning indicator

Included in delivery: 1 x fence unit, 1 x 230 volt power pack (371023), 1 x 12 Volt connection cable, 1 x fence connector cable, 1 x ground connector cable





Ref. no.	Description	Width	Depth	Height	Ø	€
375151	Solar Panel with holder for battery box or device	37,5 cm	2 cm	37 cm	1	

Model	Ref. no.			(gmax.	Ro	(\$500 Q	theor.	(max.	(max.	(max.	50 m		
Super NA 100 DUO	381471	1,5 J	1 J	12.000 V	9.000 V	4.100 V	35 km	10 km	1,5 km	0,8 km	2	1	85 mA
Super NA 200 DUO	381472	3 J	2 J	9.600 V	8.300 V	6.100 V	70 km	18 km	4 km	1,7 km	6	2	90 - 188 mA




12 V battery units are ideal for very robust animals, long fences and/or fences with vegetation if no 230 V connection is available. The discharge energy is comparable to that of power energisers (output approx. 0.5 to 5 joules). Rechargeable 12 volt batteries are used as the power source, which must be recharged every 2-4 weeks or so depending on the type of device, power requirements and battery type. Solar modules, which convert solar energy into electricity and therefore constantly top up the 12 V battery, are a good supplement. All of our 12 volt devices have deep discharge protection that helps you to maintain the performance of the 12 V batteries.

12 V



Recommended accessories:

(not included)



Ground Rod with round profile item no. 44619

44921, 44922) Underground Cable, ø 2,5 mm (44819, 44920)

Underground Cable,

ø 1,6 mm (44818,



12 volt, 88 Ah AGM battery item no. 442064

LUSIN X 18 M



Battery charger item no. 371017



Corral Warning Sign item no. 59623

230 Volt Power Pack

- for connection to a 230 Volt supply (can therefore be operated both with or without 12 Volt battery)
- for Corral Super AB devices

Do not use as battery charger!

Ref. no.		€
371012	1/80	

Corral Super AB

- with 12 volt deep discharge protection
- solar connection possible
- can be operated via a 230 V power pack (371012)
- allows for alternative operation with 9 Volt dry alkaline battery (175 Ah)
- recommended 12 V AGM battery: 88 Ah, item no. 442064



Made in



Battery voltage:Displays the current battery voltage in V. The 12 V battery should be connected to 12 V minimum – and ideally over 12.5 V.





Corral Super AB 450 digital

- extremely powerful 12 V battery unit for mobile and extreme use, also with vegetation on the fence and robust animals such as sheep, cattle etc.
- digital display for output voltage and battery voltage
- the shock strength can be steplessly adjusted with the manual controller (1 20).
- with integrated solar charge control
- allows for alternative operation with 9 Volt dry battery, can be operated via a 230 V power pack (371012), solar support possible
- with rotary switch

recommended solar module: item no. 375256 (25 watts)

Digital Display Readout and LED Lights for

Fence and Battery Voltage

Ħ

1

Ref. no.

381451



Corral Super AB 250

- universal, very powerful 12 volt battery unit for mobile use, ideal for horses and cattle
- two separate LEDs for fence voltage and battery control
- the shock strength can be steplessly adjusted with the manual controller (1 10)
- can be operated via a 230 V power pack (371012), allows for alternative operation with 9 Volt dry battery, solar support possible
- with rotary switch

recommended solar module: item no. 375156 (15 watts)

Fence control LED and separate battery warning indicator

Included in delivery: 1 x fence unit, 1 x fence connector cable, 1 x ground connector cable

€

Ref. no. 381250 1 27

Model	Ref. no.		(Dut max.	(fmax.	(No Load	(\$500 Q	theor.	max.	max.	(max.	50 m		
Super AB 250	381250	2,3 J	1,5 J	10.500 V	9.000 V	4.600 V	40 km	10 km	4 km	1,5 km	4	2	15 - 150 mA
Super AB 450 digital	381451	5,4 J	3 J	10.500 V	9.800 V	6.000 V	80 km	30 km	10 km	2,5 km	9	3	17 - 290 mA

Included in delivery: 1 x fence unit, 1 x fence connector cable, 1 x ground connector cable

€

Corral Super A

- low power consumption thanks to energy saving mode
- with On/Off switch
- weather-resistant and sturdy housing
- incl. fence and ground connection cable
- solar option possible
- microprocessor controlled
- 12 V battery terminals made from very high-quality stainless steel









Corral Super A 500

Extremely powerful fence device for 12 volt battery operation an all-round device for demanding applications

- extremely powerful 12 volt battery unit (5 joule output energy) for rechargeable 12 volt batteries
- can be used with medium to heavy vegetative growth
- ideal for horses, cattle, sheep, goats and • deterring wild animals
- with High/Low/OFF switch for 2 different-strength outputs

recommended solar module: item no. 375401 (45 watts)



Corral Super A 300

- very effective 12 volt power supply for mobile use
- also for longer fences with normal vegetative growth
- also ideal for horses, cattle and sheep
- solar support possible
- with On/Off switch

recommended solar module: item no. 375251 (25 watts)



Corral Super A 100 M

- effective 12 V device for short fencing systems • with little vegetative growth - for horses, cattle and even small animals such as dogs, cats and poultry
- solar support possible
- with On/Off switch

recommended solar module: item no. 375151 (15 watts)

Multi-colour LED bar graph display (10 LEDs) to monitor the fence status - includes battery-operated warning LED

<! • × •••••••

160

Included in delivery: 1 x fence unit, 1 x fence connector cable, 1 x ground connector cable Fence control LED and separate battery warning indicator

Included in delivery: 1 x fence unit, 1 x fence connector cable, 1 x ground connector cable

Fence control LED and separate battery warning indicator

Included in delivery: 1 x fence device with galvanised metal case (int. dim. approx. 295 x 200 x 250 mm - suitable for max. 88 Ah batteries), 1 x fence connector cable, 1 x ground connector


Æ

1


Ref. no.

381475





cable €



Ref. no.	Description	Width	Depth	Height		€
375151	Solar Panel with holder for battery box or device	37,5 cm	2 cm	37 cm	1	

Model	Ref. no.			(Jmax.	Koload	(\$500 Q	theor	max.	(max.	max.	50 m		
Super A 100 M	381158	1,4 J	1 J	9.000 V	9.000 V	5.000 V	25 km	10 km	4 km	1,5 km	4	2	70 - 130 mA
Super A 300	381473	4,8 J	3 J	9.600 V	8.300 V	6.300 V	85 km	25 km	6 km	3 km	12	3	77 - 300 mA
Super A 500	381475	7,5 J	5 J	12.000 V	10.400 V	9.000 V	130 km	38 km	15 km	6 km	18	3	65 - 400 mA

Solar Panels and Accessories

Solar Panel

- self-adjusting when dimensioning is correct
- galvanised bracket for Metal Battery Case item no. 44656 and/or device (Metal Battery Case and device not included)

375401: incl. charge controller

375156 15 watt solar module for AB 250
375151 15 watt solar module for NA 100, NA 200 and A 100M
375251 25 watt solar module for NA 200
375256 25 watt solar module for AB 450 digital
375401 45 watt solar module incl. charge controller for A 500

As an environmentally friendly and innovative user, you can achieve even more: become your own power supplier to activate your fence system — by far the most ecological way on earth to generate power.

Ref. no.	Power solar module	Description	Width	Height	Depth	Ð	€
375156	15 W	with holder for battery box or device	37,5 cm	37 cm	2 cm	1	
375151	15 W	with holder for battery box or device	37,5 cm	37 cm	2 cm	1	
375251	25 W	with holder for battery box or device	37,5 cm	56 cm	2 cm	1	
375256	25 W	with holder for battery box or device	37,5 cm	56 cm	2 cm	1	
375401	45 W	with holder for battery box or device	37,5 cm	106 cm	2,5 cm	1	

Solar Panel 4 watts

- 1 x 4 Watt solar module with mount
- suitable for all 9 V devices
- solar module supports or relieves the 9 V battery during daylight hours. The battery energiser draws power from the solar module during daylight hours. The solar module cannot be used to charge to 9 or 12 V battery.

	Ref. no.	Power solar module	Width	Height	Depth	Ø	€				
1	377024	4 W	21 cm	20 cm	2 cm	1					
I	Important: Device is not included.										

Solar Set 5 Watt

The solar module permanently charges the battery during the main grazing season. The battery can be recharged any time using the 230 volt mains energiser.

• suitable for 12 volt-enabled 9 volt dry battery units



Set consisting of: 1 x solar module 5 watts with holder, 1 x AGM battery, 12 V, 15 Ah incl. charging control, 1 x 230 Volt

Ref. no.	Power solar module	Ð	€
377056	5 W	1	

Recommendation: During winter storage connect the battery to the power pack for 24 hours approx. every 2 months.

Important: Device is not included.






Metal Battery Cases

Top Seller

Anti-Theft-Box

- electrifiable metal battery box made from galvanised steel
- space for one battery unit max. 36.5 cm x 11 cm x 37 cm or all 12 volt devices for wall mounting
- space for one 12 V battery max. 36.5 cm x 21.5 cm x 21 cm
- lockable, lock included in the scope of delivery (incl. spare key)
- with metal carry handle

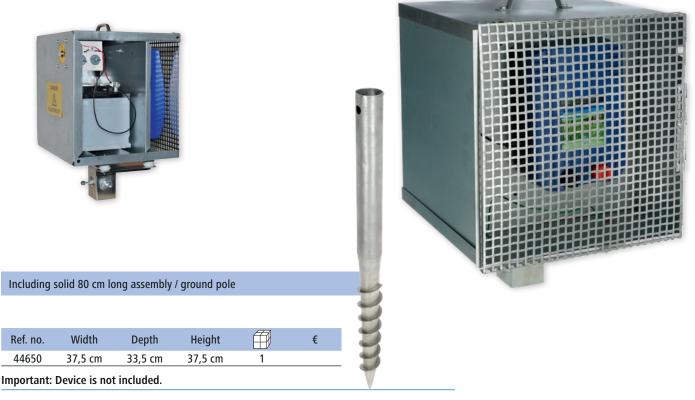

Metal Battery Boxes

- space for batteries up to 130 Ah
- · ideal for use with solar modules
- internal dimensions of battery compartment: W 36 cm x H 32 cm x D 21 cm
- space for one battery unit max. 36.5 cm x 11 cm x 37 cm or all 12 volt devices for wall mounting
- Material: metal galvanised
- with handle



• recommended solar modules: 375151, 375251, 375401

Ref. no.	Width	Depth	Height	Ð		€			
44656	37,5 cm	33,5 cm	37,5 cm	1	24			P	
Ref. no.	Description				MOQ	Pieces / unit	Ð	€	
44652	Anti-Theft Set for metal battery cases				1 blister pack	1 / blister pack	1		





Important: Device is not included.



9 V Battery Energisers

Mobile, compact - impressive technology!

The 9 volt dry battery units feature outstanding mobility, associated with a long battery service life. They are ideal for shorter fences with light vegetative growth if no mains connection is available. Alternatively, 12 volt batteries can also be used.





Recommended accessories:

(not included)



Alkaline 9 V, 75 Ah, item no. 44225

Alkaline 9 volt, 175 Ah, item no. 44226



h, item AGM battery 12 Volt, 15 Ah, item no. 441215 incl. charger



a) item no. 377024 - support for 9 V dry battery

b) item no. 377056 – 12V Solar Set (solar module 5 watts + 12 V, 15 Ah battery)



Digital Voltmeter item no. 441229



Corral Warning Sign item no. 59623

Adaptor Cable


- connects 12 Volt wet rechargeable battery
- for connection to all our 9 V electrical fences

Colour

black / red

- with 2 crocodile clips
- Cable length: 80 cm

Ref. no.

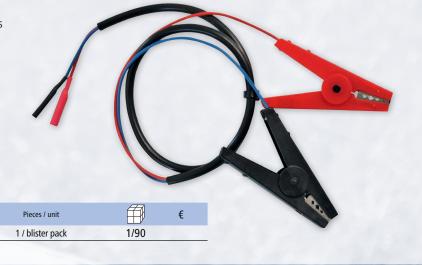



9 V Battery Energisers

9 V Battery Energisers

- daylight-bright SMD indicator light for checking devices and batteries
 choice of 2 power levels
- 12 Volt operation available -> higher performance -> deep discharge protection for 12 Volt batteries
- incl. installation ground pole
 incl. fence and ground connection cable
- microprocessor controlled
- weather-proof casing







9 V Battery Energisers



Corral Super B 340

- powerful 9 V battery unit
- for medium fence systems with little vegetative growth
- allows for alternative operation with 12 Volt battery



Corral Multi B 280

- highly effective 9/12/230 V universal device for fences with light vegetative growth
- allows for alternative operation with 12 Volt battery




Corral Super B 170

- compact, mobile 9 Volt battery unit for short fencing systems without vegetative growth
- allows for alternative operation with 12 Volt battery


Daylight-bright SMD indicator light for checking devices and batteries

Included in delivery: 1 x fence unit, 1 x installation ground rod, 1 x fence connector cable, 1 x ground connector cable



Daylight-bright SMD indicator light for checking devices and batteries

Included in delivery: 1 x fence unit, 1 x 230 Volt power pack, 1 x 12 Volt connection cable, 1 x installation ground rod, 1 x fence connector cable, 1 x ground connector cable



Daylight-bright SMD indicator light for checking devices and batteries

Included in delivery: 1 x fence unit, 1 x installation ground rod, 1 x fence connector cable, 1 x ground connector cable

Ref. no.	Ø		€
381154	1	54	

Model	Ref. no.			(gmax.	(Load	(\$500 Ω	theor.	max	max.	(max.		
Super B 170	381154	0,25 J	0,17 J	9.400 V	9.400 V	2.600 V	7 km	3 km	1 km	0,3 km	1	13 - 19 mA
Multi B 280	381166	0,4 J	0,28 J	10.000 V	10.000 V	3.200 V	9 km	4 km	1,5 km	0,4 km	1	18 - 28 mA
Super B 340	381155	0,54 J	0,34 J	9.600 V	9.600 V	3.100 V	12 km	4 km	2 km	0,5 km	1	24 - 36 mA



Sun Power S 2

- highly effective compact solar device

- ideal for hose paddocks and smaller fence systems without vegetation
 Deep discharge protection for battery voltage < 11.2 Volt (if activated => only red flashing)
 intelligent battery management with deep discharge protection: 2 weeks run time without sun and long battery life











۲

green LED for function status red LED for battery status



Included in delivery: 1 x solar unit, 1 x AGM battery, 12 volt, 4 Ah, 1 x solar module, 12 volt, 3 watt, 1 x 230 Volt power pack to recharge the gel battery and/or to trickle charge during the winter months, 1 x connector cable for fence and earth connection, 1 x ground spike

Ref. no.	ΗĮ	Ħ	ŧ		
381142	1	74			
Ref. no.		Desc	cription		€
441218	AC	GM Spare Bat	ttery 12 volt, 4 Ah	1	

Model	Ref. no.		(Dout max.)	(fmax.	Ko Load	(h 500)	theor.	(max.	max.		
Sun Power S 2	381142	0,4 J	0,25 J	10.500 V	10.500 V	2.800 V	6 km	3 km	0,7 km	1	10 - 22 mA

12 Volt Solar Units

- optimised for maintenance-free continuous operation over the grazing season on fences with little vegetation
- High/low/off switch
- micro-controller controlled
- integrated lightning protection
- intelligent, modern battery management with deep discharge protection device functions even during extended periods of bad weather
- excellent level of efficiency therefore a longer battery life
- very robust, weather-resistant, water-tight casing with carrying handle
- fast and easy to install







Spiral Ground/Retaining Anchor

- Total height of ground anchors (incl. thread) 120 cm
- incl. mounting screw screw-in assistance
- Material: metal





Ref. no.	Description	Height	Ð	€
442383	for Sun Power solar devices	120 cm	1	

Wooden Post Mount





Ref. no.	Description	Material	Ø	€
442384	includes wood screws	stainless steel	1	



Corral Sun Power S30

Our most powerful solar device. All-round device for up to medium vegetative growth. Ideal for horse and cattle paddocks, goats, sheep.



2,30

Powerful solar device for normal fence systems with little vegetation Ideal for horse and cattle paddocks, goats, poultry, domestic pigs.

New product

NEW




Corral Sun Power S8

Effective solar unit for normal fence systems with little vegetation. Ideal for horse and cattle paddocks.


Fence control LED and visual battery warning indicator

Included in delivery: 1 x high-power compact solar device Corral S30 fully assembled, 1 x AGM battery, 12 volt, 18 Ah, 1 x permanently mounted, mono-crystalline solar module 12 volt, 25 watt, 1 x fence connector cable, 1 x ground connector cable, 1 x two-part ground/installation spear, 1 x 230 volt battery mains charger



Fence control LED and visual battery warning indicator

Included in delivery: 1 x high-power compact solar device Corral S15 fully assembled, 1 x AGM battery, 12 volt, 18 Ah, 1 x permanently mounted, mono-crystalline solar module 12 volt, 15 watt, 1 x fence connector cable, 1 x ground connector cable, 1 x two-part ground/installation spear, 1 x 230 volt battery mains charger



Function control LED and visual battery warning indicator

Included in delivery: 1 x high-power compact solar device Corral S8 fully assembled, 1 x AGM battery, 12 volt, 12 Ah, 1 x permanently mounted, mono-crystalline solar module 12 volt, 8 watt, 1 x fence connector cable, 1 x ground connector cable, 1 x two-part ground/installation spear, 1 x 230 volt battery mains charger

	Y M		
Ref. no.	Ø		€
381490	1	24	

Model	Ref. no.			(fmax.)	K oload	(f 500)	theor.		(max.	(max.	50 m		
Sun Power S30	381492	4,2 J	3 J	10.500 V	9.600 V	6.200 V	95 km	35 km	6 km	3 km	10	3	85 - 260 mA
Sun Power S15	381491	2,3 J	1,5 J	10.000 V	10.000 V	4.800 V	45 km	15 km	3 km	1,5 km	5	2	25 - 130 mA
Sun Power S8	381490	1,2 J	0,8 J	11.800 V	11.800 V	4.300 V	25 km	10 km	3 km	0,8 km	2	1	30 - 70 mA

39

Hobby Sets

Portable Fence Kit for Trekking

- assembles and disassembles quickly and easily
- weight: about 3 kg

Set consisting of: 1 x battery energiser of 3 V (incl. 2 x 1.5 V batteries), 2 Gate Handles each with 50 m tape, 4 divisible aluminium posts of 1.15 m length, 5 x expanders with pegs, 8 insulators for round posts, 1 x carry bag





Hobbyset

The ideal fence to protect your garden and to fence in dogs and cats. Excellent to enclose ponds in order to prevent e.g. cats and herons from fishing!

Set consisting of: 1 x electric fence energiser + earth/fence connecting cable, 10 x fibreglass poles, green 70 cm, 30 x wire clipps, 100 m poly wire green, 1 x earth rod, 1 x warning sign, 6 x ring insulators with wooden thread



F	Ref. no.	Description	Pieces / unit	Ø	€
2	141150	with power pack N700	1 / blister pack	1	
2	141151	with Battery Unit B40	1 / blister pack	1	

Ref. no.	Description	Colour	Material	Length	MOQ	Pieces / unit	Ø	€
441853	Spare Post	green					1/100	
44874-100	Poly wire	green		100 m	1 pieces	1 / pieces	1/20	
444265/30	Spare spring		stainless steel		1 pouch	30 / pouch	1/30/1.500	

Tournament / Paddock Set 7 x 7 m

- new tournament/paddock set for approx. 7 x 7 m
- metal posts are ideally suited for dry and rocky ground
- no catching of mane or tail haireverything complete in one carry bag
- set up and dismantled in just a few minutes
 weight with device: 13.5 kg, without device: 12.5 kg

Set includes: 4 x metal post galvanised with 153 cm total height, each comes with 4 x FlexiRope incl. gate handle with galvanised hook and matching gate insulators







Ref. no.	Description		€
446500	without Fence Device	1	
446501	with Fence Device Compact Power B 40 (incl. 2 x 1.5 Volt batteries)	1	

12 V Batteries

Special Wet Rechargeable Battery 12 V

- extremely low self-discharge
- ideal for 12 V battery units with or without solar panel
- designed especially for fencing units due to its slow charge and discharge cycles
- acid: sulphuric acid 37 % = density of 1.28
 supplied without acid
- when not in use, the battery must be charged at least once a month
- "dry pre-charged" battery
- charge completely after filling with acid
- capacity data for a 100-hour standard discharge (C100)
- 1-year warranty (note: warranty does not cover deep discharging)

Important: for safety reasons, the batteries are supplied without battery acid. We recommend that they be filled by a professional "on site"!



- 80 Ah and 100 Ah for 12 volt devices with integrated plastic battery container
- 130 Ah suitable for devices with metal battery box 44656 and 44650

Ref. no.	Voltage	Capacity	L x W x H	Weight	Battery acid	Ø		€
442060	12 V	80 Ah	242 x 175 x 190 mm	10,8 kg	3,2 L	1	84	
442061	12 V	100 Ah	278 x 175 x 190 mm	12,7 kg	3,7 L	1	64	
442062	12 V	130 Ah	353 x 175 x 190 mm	15 kg	5 L	1	48	

What does C100 mean when referring to the capacity of a rechargeable battery?

The usable capacity of a rechargeable battery is heavily dependent on the amount of discharge current. Since the rechargeable battery is completely discharged during a measurement, a discharge over a longer period (e.g. 100 hours for C100) means that the discharge current is much lower than during a rapid discharge (e.g. 20 hours at C20; C20 always applies when no other data are provided). As a result, a rechargeable battery in an application with very low discharge current has a higher usable capacity than when the same rechargeable battery is used within a shorter timespan and thus at a higher discharge current.


Expert tip:

How to calculate the run time of your 12 volt battery:

- 1. Usable capacity = rated capacity x 0.65
- 2. Energy consumption of device (Ampere) = energy consumption in mA (see device type plate) : 1000
- 3. Operating period (hours) = usable capacity: energy consumption

Example:

- 1. 88 Ah x 0.65 = 57.2 Ah
- 2. 120 mA : 1000 = 0.120 A
- 3. 57.2 Ah : 0.120 A = 476 hours (19 days)



Number of charging/discharging processes



12 V Batteries

Top Quality

The new alternative to popular lead-acid batteries. The AGM fleece technology makes topping up battery acid a thing of the past. Fleece batteries are completely leak-proof, maintenance-free and cycle-resistant.

- No acid required
- Completely leak-proof
- Maintenance-free user-friendly

Premium AGM Battery

- rechargeable AGM Fleece Battery
- immediately ready for use
- filled and charged, ready to install immediately
- capacity data for a 100-hour standard discharge (C100)
- low self-discharging compared to standard batteries
- in OEM quality
- better charging characteristics than standard lead/acid and AGM batteries (e.g. when charging from solar panels)
- supports short charge/discharge cycles better than standard lead/acid or AGM batteries (micro-cycle window)
- can be stored for at least 9 months
- leakproof: double cover with safety valve, gas recombination and backfire protection
- 1-year warranty (note: warranty does not cover deep discharging)



Ref. no.	Voltage	Capacity	L x W x H	Weight	Ø		€
442064	12 V	88 Ah	275 x 175 x 190 mm	20,7 kg	1	68	

Premium AGM 15 Ah Complete Set

- for all 9 Volt devices that are also designed for 12 Volt operation
- the rechargeable 12 Volt, 15 Ah (C100) AGM battery can be recharged via a power pack
- the integrated charger controller prevents overcharging and protects against deep discharge
- an optional 5 Watt solar module can also be connected during grazing periods for continual operation
- filled and charged, ready to install immediately
- capacity data for a 100-hour standard discharge (C100)
- low self-discharging compared to standard batteries
- in OEM quality
- better charging characteristics than standard lead/acid and AGM batteries (e.g. when charging from solar panels)
- supports short charge/discharge cycles better than standard lead/acid or AGM batteries (micro-cycle window)
- can be stored for at least 9 months
- · leakproof: double cover with safety valve, gas recombination and backfire protection

ideal for 9 V devices

Included in delivery: 1 x AGM battery 12 V, 15 Ah (C100) incl. charging control, 1 x 230 Volt power pack

Ref. no.	Voltage	Capacity	L x W x H		€
441215	12 V	15 Ah	150 x 100 x 115 mm	1/4	






 \oplus Θ

Battery Accessories

Battery Tester

- test range 6 20 volts
- the open-circuit voltage (at the beginning) and the voltage under load (after the -- characters) are displayed.
- no batteries required



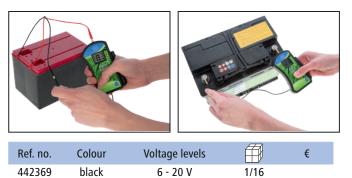


Battery Charger

for 12 Volt wet batteries and premium AGM batteries

- charging voltage: 14.4 V or 28.8 V, charging current: 1.5 A 10.0 A (charging energy)
- fitted with two removable, colour-coded leads (1 x crocodile battery terminal and 1 x eyelet)
- electronically protected against misuse and shorts
- protection circuit against overheating with mini-fan inside
- can also be used as a power generator (13.6 V / 5.0 A)!
- fully automatic charging with electronic overcharge protection





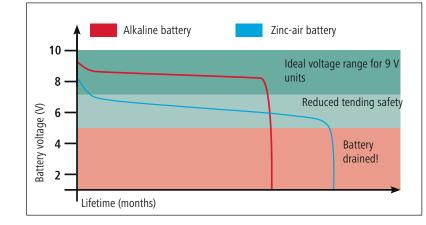

Dry Battery Alkaline Power Block

- 9 V alkaline batteries produce a constant high voltage output throughout their entire lifetime. This means the fence device also emits a constant output during this time.
- free from mercury and cadmium



90 Ah

130 Ah

All prices include disposal fee!

Ref. no.	Voltage	Capacity	L x W x H	Ð		€
44225	9 V	75 Ah	165 x 110 x 110 mm	1/4	360	
44228	9 V	120 Ah	165 x 110 x 110 mm	1/4	360	
44226	9 V	175 Ah	185 x 130 x 160 mm	1/4	216	

Zinc-Air Dry Battery

- standard dry type battery for application in electric fence equipment, not designed for high power
- Nominal voltage: 8,4 V



Ref. no.	Voltage	Capacity	L x W x H	Nominal voltage	Ø		€
441212	9 V	55 Ah	165 x 113 x 113 mm	8,4 V	1/4	360	
441213	9 V	90 Ah	190 x 130 x 160 mm	8,4 V	1/4	216	
441219	9 V	130 Ah	190 x 130 x 160 mm	8,4 V	1/4	216	
44227	7,5 V	90 Ah	220 mm	8,4 V	1/4	120	

All prices include disposal fee!



Testing and Control Equipment

Pferdekoppel

Talwiese

AKTIV ZAUNSPANNUNG 4 11,7 kV

19:03

≡

Made in Germany

C

.11 5

FenceCONTROL

...mobile monitoring and control!

The new FenceCONTROL allows for easy monitoring and control of remote fence systems. You will be immediately notified via push message on your mobile phone if it falls below the minimum output voltage (threshold can be set individually) or in the event of a complete failure. On the app, you will receive further details about the monitored fence system, and you can modify alarm thresholds, track fence and battery voltages graphically, and receive the present status at any time.

FenceCONTROL works with all commercially available fence devices.



Control Unit

The control unit can either be operated directly via 9, 12, or 230 volts (especially when the control unit is not positioned in direct proximity with the fence control unit) or via the same power supply (9 or 12 volts) as the electric fence battery energizer (please also order the corresponding connection cable).



Testing and Control Equipment

Important: When purchasing the FenceControl (441122), the appropriate power cable for 230 volt, 12 volt, or 9 volt must be bought separately, according to the selected power supply.




Functions:

- FREE app for your mobile phone
- display of fence voltage and supply voltages
- On/off switching of the monitored 9 or 12 Volt fence device (if the fence device and the control unit are supplied via the same power source. To optionally also switch 230 V adapters on/off, the on/off switch adapter 441123 is also required)
- if the main power source fails, the FenceCONTROL is supplied with power for at least 24 h by the backup battery
- unlimited number of users
- · graphic display of the fence voltage, main and backup battery history
- status update possible at any time
- management of up to 10 FenceCONTROL units
- 2 years' free mobile data transfer included (then approx. €35/year)
- More information at www.ako-agrar.de/fencecontrol

Ref. no.	Ð	€
441122	1/20	

Included in delivery: 1 x FenceCONTROL (441122), 1 x backup li-ion battery (268218), 1 x fence connection cable (441603/011), 1 x ground connection cable (269791)

Ref. no.	Description		€
371018	230 Volt Power Pack for FenceCONTROL	1/54	
371020	Connecting Cable 9 V	1/60	
371019	Connecting Cable 12 V	1/60	
441123	On/off switching adapter for 230 Volt devices	1	

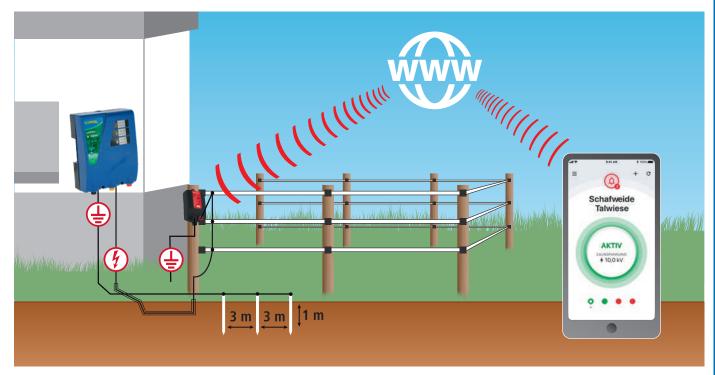

⊕ ⊖ _____

TV

CORRAL


Testing and Control Equipment

Signal Light

- flashes with every fence impulse
- under 3000 V light stops flashing and thereby shows that the fence is no longer safe
- using it on several spots on your fence gives you easy visual control of your fence status 'in situ' even during the day
- also ideal as additional defence against wild animals!
- no batteries required

Place the signal light at the end of your fence system. This means you can tell at a glance whether the minimum herding voltage of 2,500 V is flowing at the end of your fence and thus through your entire system.

Ref. no.	Colour	Ø	€
441223	yellow	1/50	

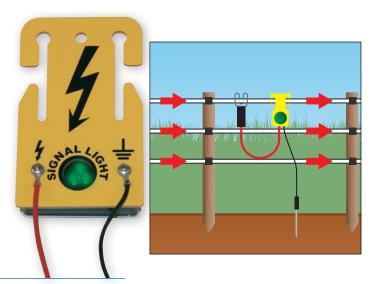



Fence Controller

For precise troubleshooting of your electric fence

This is a dual function device - it is a digital fence voltage tester and ammeter. This enables simple detection of possible faults on the fence.

- with illuminated direction indicators in each case.
- convenient and safe application due to ergonomic housing
- universal contact clips suitable for all conducting materials
- convenient measurement through automatic earthing

Ħ

1/25

€

• operated with: 1 x 9 V Block Battery

Colour

black

· Battery included

1	
	ז™ 40™ קיין
	Test Press Fence Controller

Digital Voltmeter

- to accurately measure voltages of between 0 and 9,900 volts at the fence
- incl. belt pouch
- includes ground spike
- operated with: 1 x 9 V Block Battery
- Battery included



Ref. no.	Colour	Ħ	€
441229	black	1/25	

Ref. no.

442565

Fence Tester




Fence-Checker

Visual and Audible Hedge Tester


- mini handheld display device for electric fences
- · emits auditory and visual signals when the fence has a voltage
- incl. battery test function
- easy measuring without ground spike
- operated with: 1 x 12 V Alkaline ٠
- · Battery included









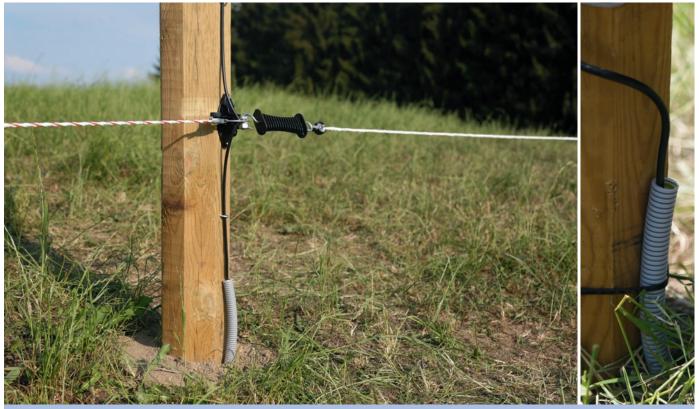

Tip: Underground cable must be laid in a plastic conduit to prevent damage to the cable!

Expert tip:

- Always insert the ground rods into damp soil.
- Maintain a distance of 3 m between the individual ground rods.
- Use galvanised ground rods rust has an insulating effect and prevents voltage returning to the unit.



44619

Special Ground Rod


- made from hot-dip galvanized T-steel
- with M8 stainless steel screw for connecting the ground connection cable
- Material: Steel hot-dip galvanised

Ref. no.	Height	Ē		€	
44615	1 m	1	400		
441369	2 m	1	200		• ••

Special Ground Rod for mobile use

- easy to pull out with T-handle
- with M8 stainless steel screw for connecting the ground connection cable
- Material: Steel galvanised

Ref. no.	Height	Ē		€
44619	75 cm	1	500	

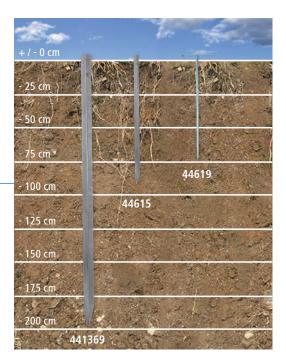



Fence Power/Ground Connector Cable

- with M8 eyelets
- connects fencer and ground rod
- excellent connection between indoors energizer to outside ground rod
- also suitable for connecting several ground rods



Ref. no.	Length	Colour	conductor diameter	conductor cross-section	Exterior diameter	resistance Ω/m		€
44635	3 m	black	1,32 mm	1 mm²	7 mm	0,025 Ω/m	1/40 1.920	
44636	8 m	black	1,32 mm	1 mm ²	7 mm	0,025 Ω/m	1/15 360	

High Voltage Underground Cable Premium

- · double-insulated with tinned copper conductor
- for fence and earth cables
- high voltage insulation up to 20.000 Volt



Ref. no.	Length	Delivery	Colour	conductor diameter	conductor cross-section	Exterior diameter	resistance Ω/m	₿		€
440110	50 m	on a coil	green	1,6 mm	1,5 mm²	7,6 mm	0,014 Ω/m	1	84	
440111	100 m	on a coil	green	1,6 mm	1,5 mm²	7,6 mm	0,014 Ω/m	1	72	

51

High Voltage Underground Cable

- single-insulated with tinned copper conductor (bundled copper wires)
- for fence and earth cables



Ref. no.	Length	Delivery	Colour	conductor diameter	conductor cross-section	Exterior diameter	resistance Ω/m			€
44630	25 m	on a coil	black	1,32 mm	1 mm ²	7 mm	0,025 Ω/m	1	216	
44632	50 m	on a coil	black	1,32 mm	1 mm ²	7 mm	0,025 Ω/m	1	84	

High Voltage Underground Cable

- double-insulated with galvanized steel wire core
- for fence and earth cables
- ideal for permanent fence systems




Ref. no.	Length	Delivery	Colour	conductor diameter	conductor cross-section	Exterior diameter	resistance Ω/m	Ø		€
44818	25 m	on a coil	black	1,6 mm	2 mm ²	6 mm	0,07 Ω/m	1	216	
44921	50 m	on a coil	black	1,6 mm	2 mm ²	6 mm	0,07 Ω/m	1	216	
44922	100 m	on a coil	black	1,6 mm	2 mm ²	6 mm	0,07 Ω/m	1	135	
44819	50 m	on a coil	black	2,5 mm	4,9 mm²	7,2 mm	0,03 Ω/m	1	165	
44920	100 m	no reel	black	2,5 mm	4,9 mm ²	7,2 mm	0,03 Ω/m	1	72	

High Voltage Cable Connector


• for the high voltage-stable, water-tight connection of high-voltage cables measuring exterior diameter 5.0 - 8.0 mm




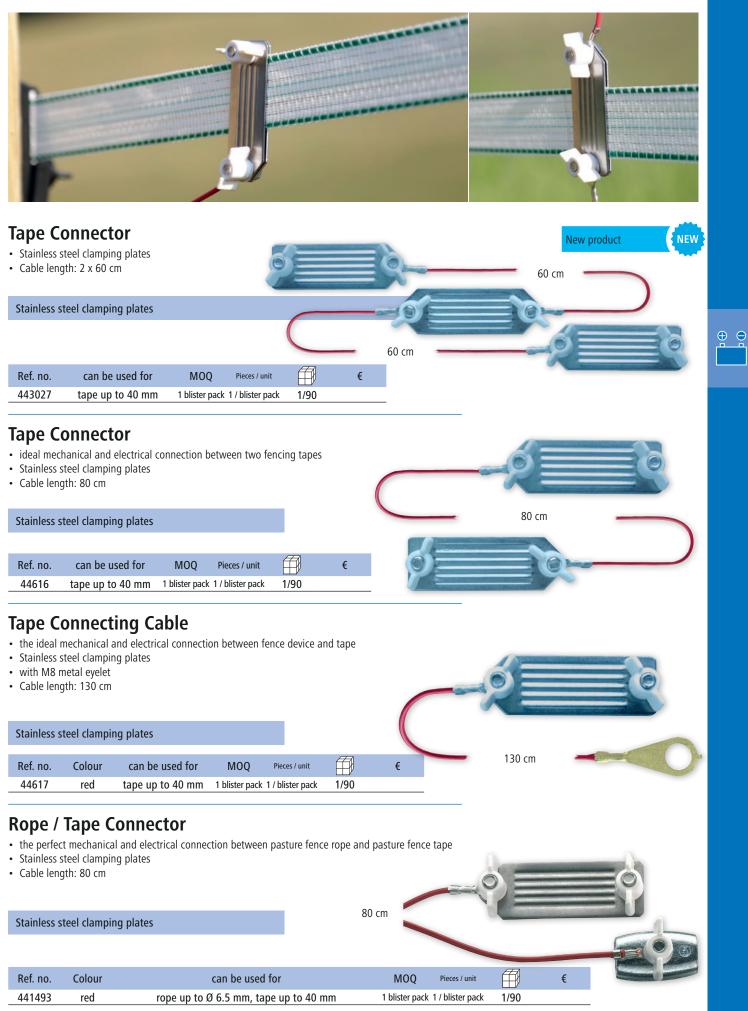

Ground and Fence Connector Cable

- Connecting parts made from stainless steel
- with M8 metal eyelet, with crocodile clip
- Cable length: 100 cm

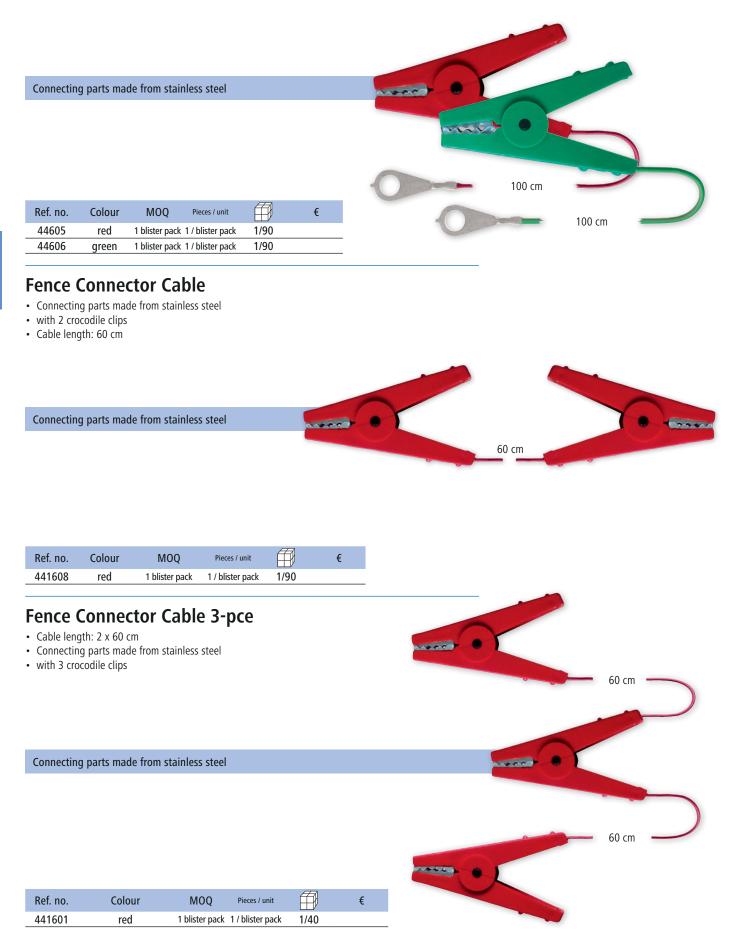

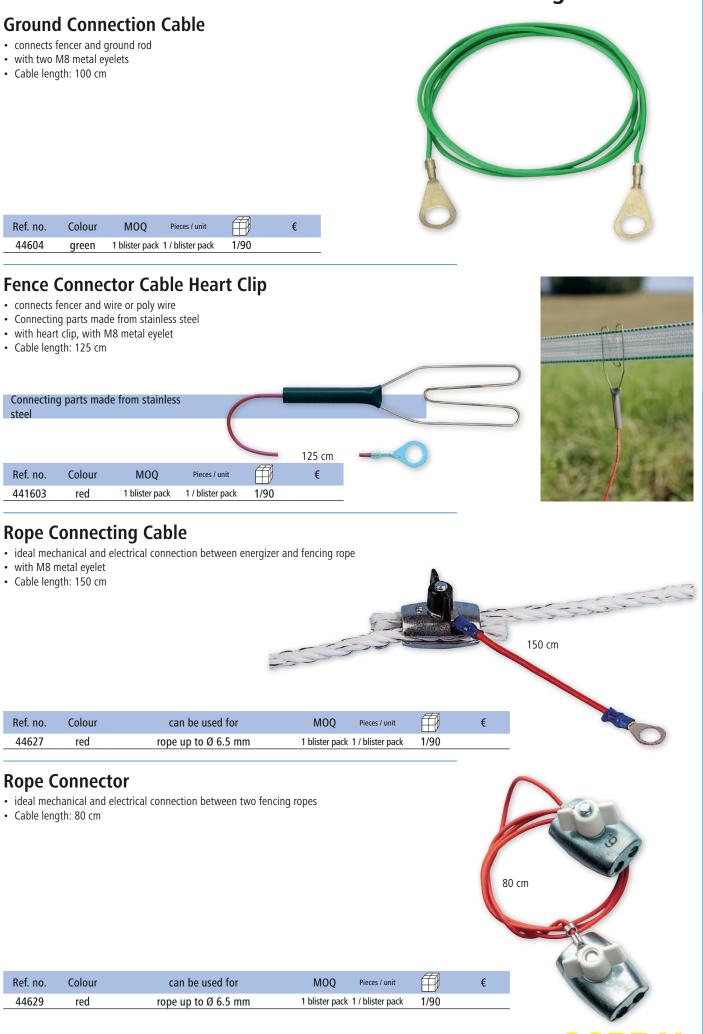

RRAL

⊕ ⊖ _____

Fencing Accessories



Lightning Protection

- protect your electric fence unit from over-voltage caused by lighting strikes to the fence
- for mounting on a fence post
- the 'lightning protection' takes the over-voltage from the fence directly into the ground through a fixed spark gap



Cut-Out Switch

- practical on/off and changeover switch for your fence system
- ideal also for mains operated fence lines
- switches two separate fence systems



4 items po	ossible			
1		Fence	1 only	
II		Fence	2 only	
+		Fence	1 + 2 toget	ther
0		Off		
Ref. no.	MOQ	Pieces / unit	Ē	€
44607	1 blister pack	1 / blister pack	1/20	

Lightning Protection Throttle

 protect your electric fence unit against overvoltage that can be caused by lightning strikes to the fence system



To protect against lightning damage, the fence cable on the building must be guided through an overvoltage protection device with throttle and spark gap which is applied to non-flammable material on the outside wall of the building before being connected to the electric fence unit.

Ref. no.	Ø	€
44601	1/10	

High-power on/off switch

- extremely sturdy on/off switch for your fence system
- easy assembly on posts

Ref. no.

591226

Ĥ

1/25

€



Warning Signs

⊕ ⊖ _____



Warning Sign Electric fence

- display on public footpaths
- Material: Plastic •
- · printed on both sides

° N 1	0
C C	ORRAL
	0
S MA	Art. 59623
	403573840058704

Ref. no.	Colour	Length	Width	Ø	€
59623	yellow	20 cm	10 cm	1/10/500	



Customised warning signs

You can have warning signs made to your specifications from a minimum order of just 500 units. Simply get in touch and let us supply your motif and desired text. We will create a design and make your custom signs soon after you give your approval.

Warning Sign

 Material: Pla printed on or 	stic		v	FÜTT ERBC	TEN	BETRE VERBO	ETEIN	FREILAUFENDER BULLE	
Ref. no.	Print	Colour	Length	Width		€		1.3°	
44621	"Do not feed."	yellow	20 cm	12 cm	1/25/400				
44628	"No trespassing."	yellow	20 cm	12 cm	1/25/400				
446510	"Caution – bull in field."	yellow	20 cm	12 cm	1/25/500				

Warning Sign Caution – electric fence.

- Material: Plastic
- · printed on both sides

Ref. no.	Print	Colour	Length	Width	Ø	€
44620	"Caution Electric Fence!"	yellow	20 cm	12 cm	1/10/400	



Reels

Reel DUO

Practical double reel allows you to pull 2 rows of poly wires at the same time

- pre-loaded with 2 x 250 m high-quality 3 x 0.25 mm TriCond conductor material
- locking pin prevents reel from accidental reeling on
- impact-proof plastic guarantees durable use
- special eyes for well-directed braid routing
- Drum mounting: with cotter pin



3 x 0.25 mm TriCond

Ref. no.	Colour	€ 1	E		
441045	black / blue	1			
Ref. no.	Description		Colour	Material	Ø
442705	Roll-up Adapter Easy-	Drill	red	Plastic	1/20

Plastic Reel Super

- very hardwearing plastic reel (replaceable)
- locking pin prevents reel from accidental reeling on
- the ideal aid for fence building
- Drum mounting: with cotter pin





Locking pin

270blue600 m tape (10 mm), 500 m rope (6 mm), 1.000 m Poly wire (3 mm)1. no.DescriptionColourMaterial	Ref. no.	Colour	can be used for		É	Ð	€
. no. Description Colour Material ∰ € 271 Replacement Drum black 1	44270	black 600 m tape (10 mm), 5	00 m rope (6 mm), 1.000 m Poly v	wire (3 mm)		1	
271 Replacement Drum black 1	59270	blue 600 m tape (10 mm), 5	00 m rope (6 mm), 1.000 m Poly v	wire (3 mm)		1	
	Ref. no.	Description	Colour N	Material	Ø	€	
271 Paplacement Drum blue 1	44271	Replacement Drum	black		1		
ZTI Replacement Drum Dide I	59271	Replacement Drum	blue		1		
272 Frame single metal 1/25	44272	Frame single		metal	1/25		
2705 Roll-up Adapter Easy-Drill red Plastic 1/20	442705	Roll-up Adapter Easy-Drill	red	Plastic	1/20		

Reel Super Big

- extra-wide design
- locking pin prevents reel from accidental reeling on
- Drum mounting: with cotter pin



Locking pin

Ref. no.	Colour	can b	e used for			Ø	€
441270	black	1.200 m tape (10 mm), 1.000 m r	ope (6 mm), 2.000 n	n Poly wire (3 n	nm)	1	
Ref. no.		Description	Colour	Material	Ø	€	
441272		Frame for Reel Super BIG		metal	1		4
442705		Roll-up Adapter Easy-Drill	red	Plastic	1/20		
441271	R	eplacement Drum Super Big	black		1		

Reels

Euro Reel

- metal hook allows fast electrification of the conductor material on the reel!
- with metal hook
- Drum mounting: with linch pin





Ref. no.	Colour	drum ø	can	be used for			Ħ	€
441041	black / red	18 cm	200 m tape (10 mm), 200 m r	ope (6 mm)	, 500 m Poly	wire (3 mm)	1/5	
				Æ				
Ref. no.		Description	Colour	\blacksquare	€			
441201		Replacement Drum for Euro Ree	l black	1/10				

Euro Reel Eco

- with plastic hook
- Drum mounting: with linch pin



Ref. no.	Colour	drum ø	can be use	ed for	Ø		€
441040	black	18 cm	200 m tape (10 mm), 200 m rope (6	mm), 500 m Poly wire (3 mm)	1/5		
Ref. no.			Description	Colour	Ð	€	
441201		Re	eplacement Drum for Euro Reel	black 1	10		_

400 m tape (10 mm), 400 m rope (6 mm), 800 m Poly wire (3 mm)

Euro Reel Big

• metal hook allows fast electrification of the conductor material on the reel!

drum ø

24 cm

Description

Replacement Drum for Euro Reel Big

• Drum mounting: with linch pin



Colour

black / red

Ref. no.

441042

Ref. no.

441206



Ħ

1/10


Colour

black

1/5

€



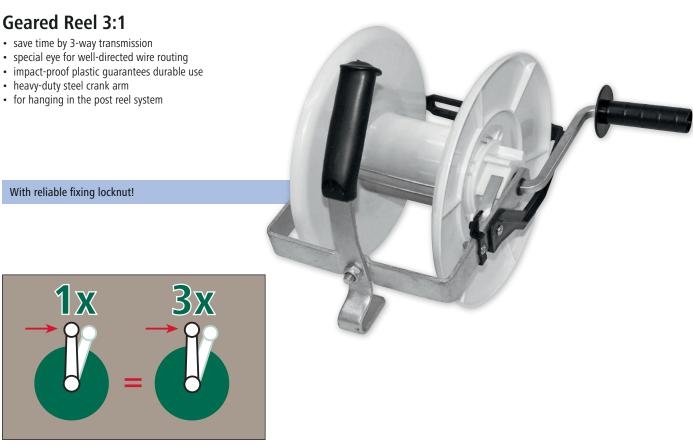

Ref. no.	Colour	can be used for		€
44280	white	200 m tape (40 mm), 600 m Poly wire (3 mm)	1	

Compact Reel

- impact-proof plastic guarantees durable use
- special eye for well-directed wire routing
- heavy-duty steel crank arm
- galvanized carry handle for manual use or for clipping into the portable reel
- systemwith locking ratchet
- for hanging in the post reel system
- Drum mounting: with locknut



Reels

Ref. no.	Colour	can be used for		€
44296	black	200 m tape (40 mm), 600 m Poly wire (3 mm)	1	

Post reel systems for temporary fencing

Multi Post

- the ideal solution for corner and gate systems for mobile fencing (plastic, metal)
- holder for clasps (44298) not included in the scope of delivery

A perfect professional reel system for temporary fencing systems that have to be assembled and disassembled quickly and for many years of use. The indispensable aid for modern fencing.



Ref. no.	Description	Total height	Material thickn	ess		€			
44297	for max. 3 reels	120 cm	4 mm	1	50				
44299	for max. 4 reels	165 cm	4 mm	1	50		-		
Ref. no.	Desci	ription	Colour	Material		MOQ	Pieces / unit	Ø	€
44324	Ring Insulator	for metal post	black	Plastic		1 pouch	25 / pouch	1/25/500	
441360	Corner insu	ulator Super	black	Polyamid	Ĵ	1 pouch	10 / pouch	1/10/250	
441241	Gate Insulator w	vith metric thread	black	Plastic		1 pouch	10 / pouch	1/10/250	
44298	Reel	Holder	m	etal galvan	ised			1/50	
44350	Corner/Stretch	Insulator Profi	black	Plastic		1 pouch	10 / pouch	1/10/200	

Reel Holder

- attaches reel
- with a plastic clamping screw
- Material: metal galvanised

Ref. no.		€
44298	1/50	







61

0


0

Netting


Fence netting is always the first choice when you want to cordon off an area quickly and easily to hold animals, or even to protect your property from wild animals. Sheep and goats place especially high demands on fence netting: Sheep are robust animals and also protected by their dense wool against electrical shocks. This is why care should be taken to select a powerful fence device (12 V or 230 V) for all netting, in order to achieve the maximum tending safety.

Our fence nettings are available in different versions and thus suitable for all types of ground conditions and applications. The combination of robust plastic or fibreglass posts and high-quality conductor materials ensure the highest herding safety, both for professional sheep farmers as well as small animal husbandry in the hobby segment.













tion of several nets!











- ideally suited as supporting start and end posts, or for stabilising corners of pasture netting
- The post is simply pushed into the corners, and the net is thereby tensioned
- solid post made of galvanised round steel (ø 14 mm), with foot lug
- Post tapered at the bottom for easier penetration into the earth
- Jacketing with robust plastic tube (ø 20 mm) prevents power leakage (if electrifiable nets are used)

Utility model application registered!

Ref. no.	Description	Total height	post ø	Length ground nail	MOQ	Pieces / unit	Ø		€
27340	up to a height of 90 cm	120 cm	14 mm	25 cm	4 pieces	4 / pack	1/4	1.000	
27350	from a height of 90 cm	145 cm	14 mm	25 cm	4 pieces	4 / pack	1/4	1.000	





TitanNet

with vertical struts

3 year warranty of UV stability


TitanNet sheep netting was developed particularly for uneven terrain. Instead of the soft stranded material, rigid plastic strands were used for the verticals. These are permanently linked at intervals of 30 cm with the horizontal poly wires, ensuring a compact structure even on hilly and uneven terrain.

- horizontal current conduction with 3 x 0.20 mm stainless steel conductors per wire
- increased conductivity thanks to the use of 5 stainless steel wires and a tin-plated copper wire in the topmost poly wire
- · welded knots
- galvanised ground spike on plastic post
- galvanised ground spike on plastic post
 head insulator and ground stopper make self-loosening of the poly wire virtually impossible
- we offer a 3-year warranty against UV damage for all plastic poly wires

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post	Ð		€
27211	Single prong	50 m	90 cm	orange / black	14	27276	1	35	
27212	Double prong	50 m	90 cm	orange / black	14	27277	1	35	
27213	Single prong	50 m	108 cm	orange / black	14	27278	1	24	
27214	Double prong	50 m	108 cm	orange / black	14	27279	1	24	



Enhanced stability and optimal terrain suitability provided by sturdy vertical strands 30 cm apart.

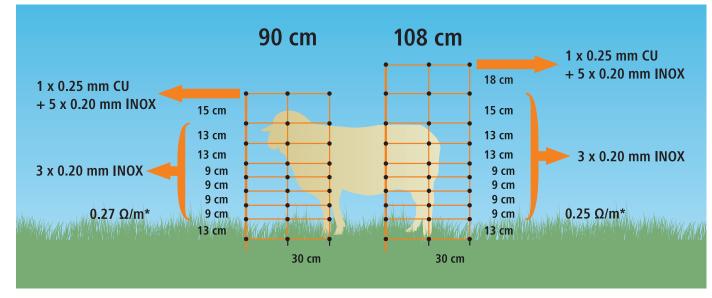

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Description	Ground spike	Colour	Material	Post height	Ø	€
27249-5	Head Insulator for Pasture Netting		black	Plastic		1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic		1/10/500	
27276	Spare Post	Single prong	black	Plastic	90 cm	1/100	
27277	Spare Post	Double prong	black	Plastic	90 cm	1/50	
27278	Spare Post	Single prong	black	Plastic	108 cm	1/100	
27279	Spare Post	Double prong	black	Plastic	108 cm	1/50	
27293	sheep netting repair set		orange			1/100	
27322	Floor Anchor		black	Plastic		1/10/300	



27249-5 Spare head insulator





65



ClassicNet


- 14 sturdy plastic posts
- horizontal current conduction with 3 x 0.20 mm stainless steel conductors per wire
- welded knots

- strengthened, energized upper poly wire
 galvanised ground spike on plastic post
 head insulator and ground stopper make self-loosening of the poly wire virtually impossible
- we offer a 3-year warranty against UV damage for all plastic poly wires

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post			€
27261	Single prong	50 m	90 cm	orange	14	27301	1	30	
27262	Double prong	50 m	90 cm	orange	14	27303	1	30	
27263	Single prong	50 m	108 cm	orange	14	27305	1	30	
27264	Double prong	50 m	108 cm	orange	14	27304	1	30	





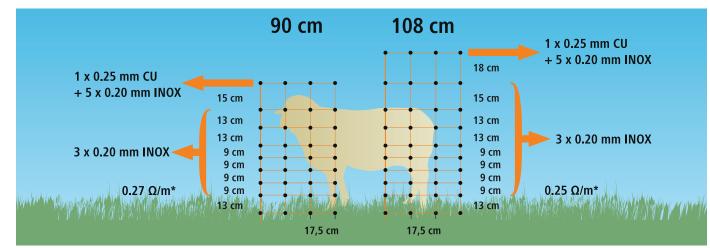

* Based on the total conductor cross-section of all live poly wires in the pasture netting


Ref. no.	Description	Ground spike	Colour	Material	Post height		€
27301	Spare Post	Single prong	yellow	Plastic	90 cm	1/50	
27303	Spare Post	Double prong	yellow	Plastic	90 cm	1/50	
27305	Spare Post	Single prong	yellow	Plastic	108 cm	1/50	
27304	Spare Post	Double prong	yellow	Plastic	108 cm	1/50	
27249-5	Head Insulator for Pasture Netting		black	Plastic		1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic		1/10/500	



27249-5 Spare head insulator



67

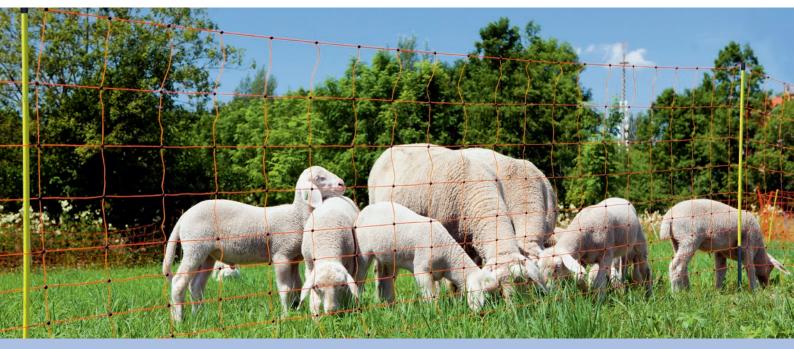

Our OviNet Profi impresses with low weight and volume as well as the unbelievable sturdiness, stability and handiness of the fibreglass posts!

OviNet Profi

Extra-durable fibreglass poles ensure easy handling due to a small post diameter and noticeable weight reduction.

• 14 sturdy fibreglass posts

1 x 0.25 mm CU + 5 x 0.20 mm INOX

3 x 0.20 mm INOX

0.27 Ω/m³

- Horizontal current conduction with 3 x 0.20 mm stainless steel conductors per poly wire
- increased conductivity thanks to the use of 5 stainless steel wires and a tin-plated copper wire in the topmost poly wire = 20 times more conductivity than standard netting. Especially well suited for use with several nets in a row. welded knots •

15 cm


13 cm 13 cm

> 9 cm 9 cm 9 cm

9 cm 13 cm

90 cm

- galvanised ground spike on fibreglass stake with plastic step
- we offer a 3-year warranty against UV damage for all plastic poly wires •

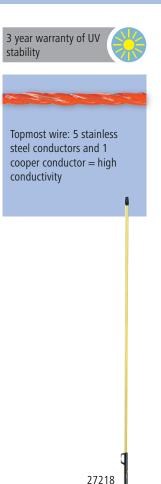

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacem	ent post		€
27220	Single prong	50 m	90 cm	orange	14	27218	1	l 40	
Ref. no.	Description	I	Ground spike	Colour	Material	Height		€	
27218	Spare Post		Single prong	yellow	fibreglass	90 cm	1/50		

17,5 cm




with reinforced black vertical bars, spacing 90 cm

EasyNet

Sheep netting with ground separation - perfect conductivity even with heavy vegetation.


Extra-durable fibreglass poles ensure easy handling due to a small post diameter and noticeable weight reduction.

- 15 stable and very sturdy fibreglass posts
- Horizontal current conduction with 3 x 0.30 mm TriCOND conductors per poly wire very good conductivity and long durability
- galvanised ground spike on fibreglass stake with plastic step
- with additional black vertical bars every 90 cm
- · ground clearance makes mowing easier and decreases the conduction through the vegetation
- · especially fast attachment and removal due to large mesh size
- we offer a 3-year warranty against UV damage for all plastic poly wires





All conductors: TriCond = 5 x higher conductivity than stainless steel conductors

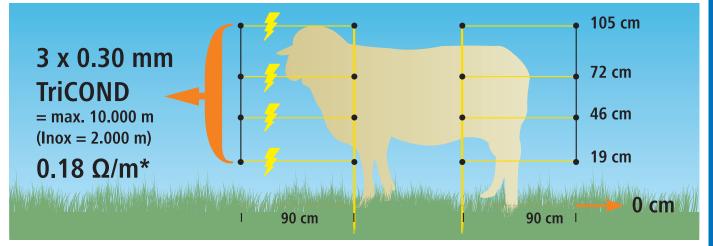


* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matchi	ng replacement pos	t	Ð		€
27200	Single prong	50 m	105 cm	yellow / black	15		27201		1	40	
Ref. no.	Description	Ground spike	Col	our	Material	Height	Ð	€			
27201	Spare Post	Single prong	yel	low	fibreglass	105 cm	1/50				
44428	Additional Insulator		bla	ack	Plastic		1/25/1.000		-		



OviNet orange


- height 90 cm (9 horizontal poly wires) or 108 cm (10 horizontal poly wires)
- sturdy plastic posts with galvanized bottom tip
- Horizontal current conduction with 3 x 0.20 mm stainless steel conductors per poly wire
- strengthened, energized upper poly wire increased conductivity thanks to the use of 5 stainless steel wires and a tin-plated copper wire
- extremely stable welded knots
- · head insulator and ground stopper make self-loosening of the poly wire virtually impossible
- we offer a 3-year warranty against UV damage for all plastic poly wires

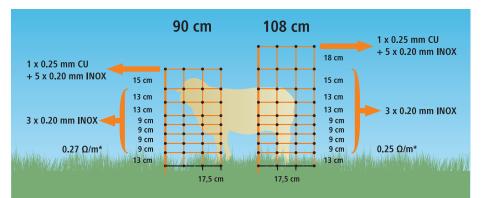

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post	Ø		€
27258	Double prong	25 m	90 cm	orange	14	27246	1	40	
27251	Single prong	50 m	90 cm	orange	14	27245	1	45	
27252	Double prong	50 m	90 cm	orange	14	27246	1	45	
27253	Single prong	50 m	108 cm	orange	14	27247	1	30	
27254	Double prong	50 m	108 cm	orange	14	27248	1	30	

Ref. no.	Description	Ground spike	Colour	Material	Post height	Ø	€
27245	Spare Post	Single prong	orange	Plastic	90 cm	1/100	
27246	Spare Post	Double prong	orange	Plastic	90 cm	1/50	
27247	Spare Post	Single prong	orange	Plastic	108 cm	1/100	
27248	Spare Post	Double prong	orange	Plastic	108 cm	1/50	
27249-5	7249-5 Head Insulator for Pasture Netting		black	Plastic			
27250-5	Base stopper for pasture netting		black	Plastic	1/10/500		
27293	sheep netting repair set		orange		1/100		
27322	Floor Anchor		black	Plastic	1/10/300		



Topmost wire: 5 stainless steel conductors and 1 cooper conductor = high conductivity

Especially well suited for use with several nets in a row.

Optimal current conduction to the most remote sheep net through galvanised copper conductor in the top strand of wire. 20 times higher conductivity than standard nets.

Sheep Netting




OviNet green

- height 90 cm (9 horizontal poly wires) or 108 cm (10 horizontal poly wires)
- sturdy plastic posts with galvanized bottom tip
- Horizontal current conduction with 3 x 0.20 mm stainless steel conductors per poly wire
- strengthened, energized upper poly wire increased conductivity thanks to the use of 5 stainless steel wires and a tin-plated copper wire
- extremely stable welded knots
- · head insulator and ground stopper make self-loosening of the poly wire virtually impossible
- we offer a 3-year warranty against UV damage for all plastic poly wires

topmost wire: 5 stainless steel conductors and 1 copper conductor = high conductivity 3 year warranty of UV

stability

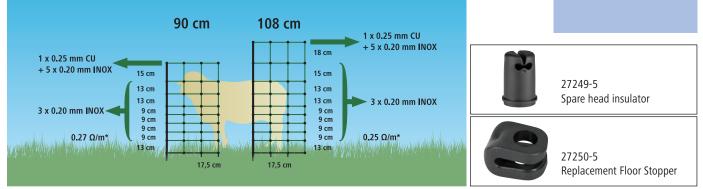

* Based on the total conductor cross-section of all live poly wires in the pasture netting

	Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement po	st 🗐		€
	27265	Single prong	50 m	90 cm	green	14	27276	1	45	
	27266	Double prong	50 m	90 cm	green	14	27277	1	45	
	27267	Single prong	50 m	108 cm	green	14	27278	1	30	
_	27268	Double prong	50 m	108 cm	green	14	27279	1	30	
	Ref. no.	Desc	ription		Ground spike	Colour	Material	Post height	Ø	€
	27276	Spar	e Post		Single prong	black	Plastic	90 cm	1/100	
	27277	Spar	e Post		Double prong	black	Plastic	90 cm	1/50	
_		_					-1 -1			

27278	Spare Post	Single prong	black	Plastic	108 cm	1/100	
27279	Spare Post	Double prong	black	Plastic	108 cm	1/50	
27294	sheep netting repair set		green			1/100	
27249-5	Head Insulator for Pasture Netting		black	Plastic		1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic		1/10/500	
27322	Floor Anchor		black	Plastic		1/10/300	

Sheep Netting



TitanLight Net

Our "lightweight" in the TitanNet range!

The increased mesh spacings allow ground game (e.g. hares and rabbits) and hedgehogs to pass safely, as well as providing a significant weight saving. This net is therefore extremely mobile, and particularly suitable for frequent repositioning. Vertically, rigid plastic struts are used instead of the soft poly wire material. These are permanently linked at intervals of 30 cm with the horizontal poly wires, ensuring a compact structure even on hilly and uneven terrain.

- Height 90 cm (5 horizontal poly wires) or 108 cm (6 horizontal poly wires), each available with single or double prong
- extremely stable welded knots
- 14 sturdy plastic posts with galvanized bottom tip
- strengthened, energized upper poly wire increased conductivity thanks to the use of 5 stainless steel wires and a tin-plated copper wire
- we offer a 3-year warranty against UV damage for all plastic poly wires

increased mesh spacings - less power leakage in heavy vegetation

• easy handling due to light weight

72

- stable plastic struts for optimum stability even in hilly terrain
- ground game and hedgehogs can "slip through" without risk


Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post			€
27351	Single prong	50 m	90 cm	orange / black	14	27202	1	24	
27352	Double prong	50 m	90 cm	orange / black	14	27203	1	24	
27353	Single prong	50 m	108 cm	orange / black	14	27229	1	24	
27354	Double prong	50 m	108 cm	orange / black	14	27230	1	24	

3 year warranty of UV stability

TV

Sheep Netting



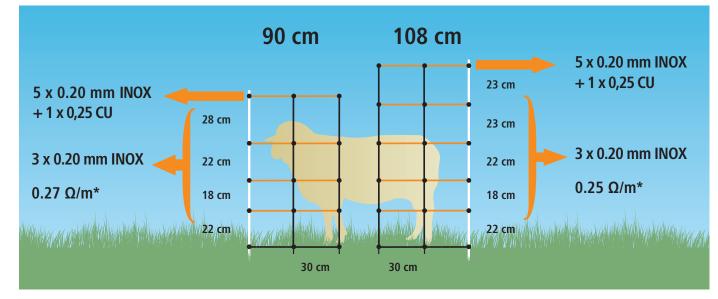

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Description	Ground spike	Colour	Material	Post height	Ø	€
27202	Spare Post	Single prong	white	Plastic	90 cm	1/100	
27203	Spare Post	Double prong	white	Plastic	90 cm	1/50	
27229	Spare Post	Single prong	white	Plastic	108 cm	1/50	
27230	Spare Post	Double prong	white	Plastic	108 cm	1/50	
27293	sheep netting repair set		orange			1/100	
27249-5	Head Insulator for Pasture Netting		black	Plastic		1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic		1/10/500	
27322	Floor Anchor		black	Plastic		1/10/300	



27249-5 Spare head insulator





CORRAL

73



WolfNet Vario

Our versatile wolf defence net in the TitanNet range.

We have worked with experts in the field of wolf defence to completely revise our wolf net, finding you the perfect compromise between user-friendliness and effective herd protection. The vertical struts, tried and true for many years, provide a sturdy hold even in hilly terrain. The special +/- principle makes our WolfNet Vario our most versatile net and you can adapt it to suit your own individual situation.

- 14 integrated white plastic posts with galvanised ground spike
- 7 x TriCOND rows of 3 x 0.30 mm with +/- connectors offer maximum conductivity
 optionally connectable, reinforced grounding poly wire for earthing along the whole length
- of the net under difficult ground conditions (e.g. very sandy or dry soils)
- improved footing and optimal terrain adaptation thanks to stable vertical struts every 30 cm
- we offer a 3-year warranty against UV damage for all plastic poly wires




stability

TriCOND conductor wires are 5 times more conductive than standard stainless steel wires of the same diameter, and therefore provide maximum security – even over long stretches. The special coating on these wires makes the material more robust and ensures long durability.

TV

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post	Ø	Ħ	€
27227	Single prong	50 m	108 cm	white / blue	14	27229	1	24	
27228	Double prong	50 m	108 cm	white / blue	14	27230	1	24	

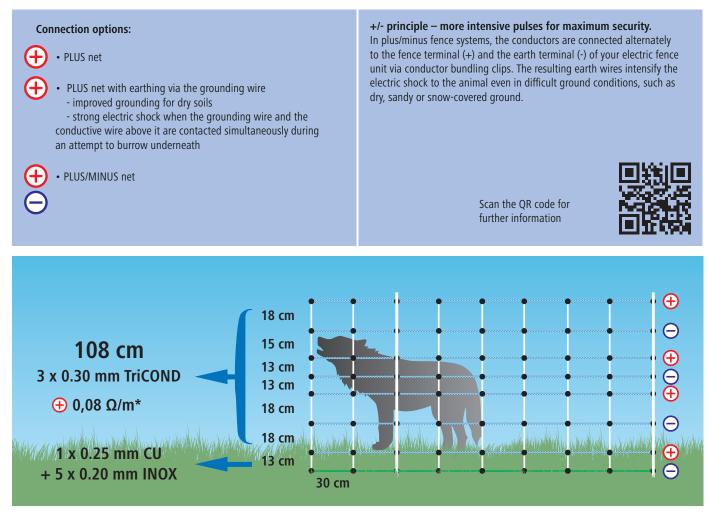

* Based on the total conductor cross-section of all live poly wires in the pasture netting



Ref. no.	Description	Ground spike	Colour	Material	Post height	Length	Width		€
27229	Spare Post	Single prong	white	Plastic	108 cm			1/50	
27230	Spare Post	Double prong	white	Plastic	108 cm			1/50	
27239	Herd Protection Band		blue / white	Plastic		100 m	80 mm	1/24	
27249-5	Head Insulator for Pasture Netting		black	Plastic				1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic				1/10/500	





Please feel free to ask us for more information about the current development of support measures for defence against wolves or herd protection in your region.

MaxiNet

6 x 0.20 mm INOX

122 cm

3 x 0.20 mm INOX

0,77 Ω/m*

The new MaxiNet with its extremely robust fibreglass posts and a height of 122 cm provides the maximum protection for your animals while being super-easy to use. Galvanised double tips on the fibreglass posts ensure perfect positioning and stability. We included findings from regional and national wolf research projects over recent years in the development of this net.

- 14 integrated and extremely robust white fibreglass posts with double tips
- horizontal current conduction with 3 x 0.20 mm stainless steel conductors per wire
- reinforced current carrying upper strand with 6 x 0.20 mm stainless steel wires for increased conductivity
- very robust ground strand through the use of extra PE monofilaments
- we offer a 3-year warranty against UV damage for all plastic poly wires


20,3 cm

20,3 cm

15,2 cm

15,2 cm

10,2 cm 10,2 cm 10,2 cm 10,2 cm

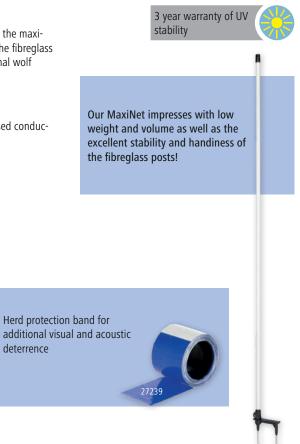

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post	Ø		€
27338	Double prong	50 m	122 cm	orange	14	27339	1	20	


Ref. no.	Description	Ground spike	Colour	Material	Post height	Length	Width		€
27339	Spare Post	Double prong	white	fibreglass	120 cm			1/60	
27239	Herd Protection Band		blue / white	Plastic		100 m	80 mm	1/24	



WolfNet 141 cm

The posts of this net are equipped with 2 additional insulators which allow the net to be extended in 2 stages to up to 141 cm.

- height of the uppermost wire 108 cm can be extended by up to 33 cm by attaching further optional conductor material (e.g. wire) or signal tape
- 15 integrated white plastic posts with single prong
- 7 x current-carrying TriCOND rows of 3 x 0.30 mm each offer maximum conductivity
- improved footing and optimal terrain adaptation thanks to stable vertical struts every 30 cm
- extra-large distance from the ground (first current-carrying wire from a height of 18 cm)
- we offer a 3-year warranty against UV damage for all plastic poly wires

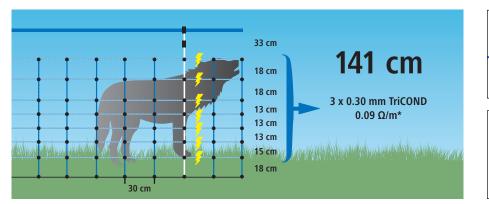



Additional insulator for expanding the network with 2 additional rows

CORRAL

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Len	gth He	ight	Qty posts	Ø		€	
27275	Single prong	50	m 108 -	141 cm	15	1	30		
Ref. no.	Description	Colour	Length	Width	Ø	€		27240	
27240	Signalling Band	blue	250 m	25 mm	1				


3 year warranty of UV stability



WolfNet Maxi

Our new, extra-high wolf defence net with the proven +/- principle


- 14 integrated white plastic posts with galvanised ground spike
- 9 x TriCOND rows of 3 x 0.30 mm with +/- connectors offer maximum conductivity
- extremely stable welded knots
- optionally connectable, reinforced grounding poly wire for earthing along the whole length of the net under difficult ground conditions (e.g. very sandy or dry soils)
- we offer a 3-year warranty against UV damage for all plastic poly wires



TriCOND conductor wires are 5 times more conductive than standard stainless steel wires of the same diameter,

and therefore provide maximum security – even over long stretches. The special coating on these wires makes the material more robust and ensures long durability.

Ref. no.	Ground spike	Length	Height	Colour	Matching replacement post	Ð	Ħ	€
27377	Single prong	50 m	122 cm	white / blue	27376	1	30	
27378	Double prong	50 m	122 cm	white / blue	27375	1	30	

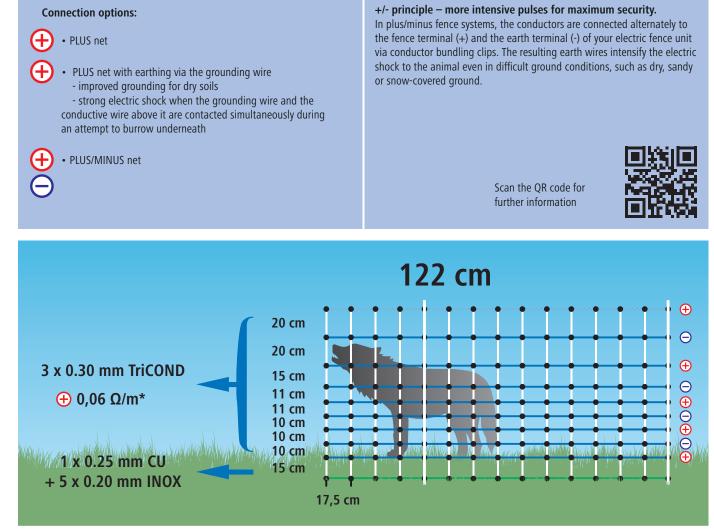

* Based on the total conductor cross-section of all live poly wires in the pasture netting



Herd protection band for additional visual and acoustic deterrence 27239 27250-5 Replacement Floor Stopper

Ref. no.	Description	Ground spike	Colour	Material	Post height	Length	Width		€
27376	Spare Post	Single prong	white	Plastic	122 cm			1/50	
27375	Spare Post	Double prong	white	Plastic	122 cm			1/50	
27239	Herd Protection Band		blue / white	Plastic		100 m	80 mm	1/24	
27249-5	Head Insulator for Pasture Netting		black	Plastic				1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic				1/10/500	

Wild animal deterrent netting



Wild animal deterrent netting




WildNet

The straightforward solution for keeping wild animals at bay!

- 3 x TriCOND rows, white/blue with 3 x 0.30 mm TriCOND wires each provide optimum conductivity (up to 10.000 m fence length)
- 12 x blue fibreglass posts, post distance approx. 4.5 m
- incl. accessories: Jointing sleeves (item no. 27321), 3 x base anchors (item no. 27322) with black nylon cord for de-tensioning, repair poly wire, and warning sign
- 25 mm blue signal tape is available as a separate accessory (250 m), item no. 27240
- we offer a 3-year warranty against UV damage for all plastic poly wires

The advantages of WildNet:

- Quicker to assemble and disassemble than conventional electric fences
- Ground clearance (better for mowing and significantly fewer diversions; i.e. more power to the fence)
- Blue 25 mm plastic signal tape (250 m, item no. 27240) can be added to improve visibility
- Nets are easy to connect with each other (the connector is integrated into the net, separate connectors are not required)

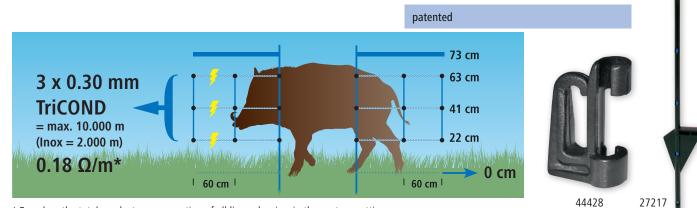

* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Length	Colour	Qty posts	Matching replacement post	Ø		€
27215	Single prong	50 m	white / blue	12	27217	1	70	

Ref. no.	Description	Ground spike	Colour	Material	Post height	Length	Width	Ø	€
27217	Spare Post	Single prong	blue	fibreglass	90 cm			1/10	
44428	Additional Insulator		black	Plastic				1/25/1.000	
27240	Signalling Band		blue			250 m	25 mm	1	


81


Poultry Netting



PoultryNet

- for hens, geese, turkeys
- welded knots
- strengthened top strand
- particularly small mesh width in the lower area of the net •
- sturdy plastic posts with galvanised ground spike
- also suitable for lambs •
- available in electrifiable and non-electrifiable designs ٠
- we offer a 3-year warranty against UV damage for all plastic wires



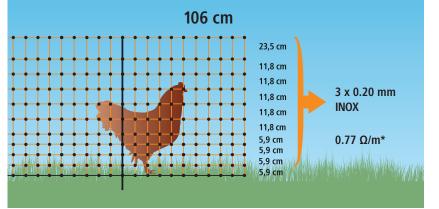

* Based on the total conductor cross-section of all live poly wires in the pasture netting

PoultryNet orange

can be electrified



Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replac post	ement		€
292271	Double prong	50 m	106 cm	orange	15	292281-7	1	16	
Ref. no.	Description	Ground	spike	Colour		Material	Post height	Ø	€
292281-7	Spare Post	Double p	orong	orange		Plastic	106 cm	1/50	

3 year warranty of UV stability

All conductors = good

stainless steel conductor

conductivity via 3 x 0.20 mm

Poultry Netting



PoultryNet green

can be electrified

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post		Ħ	€
292274	Double prong	15 m	106 cm	green	6	292281-5	1	24	
292273	Double prong	25 m	106 cm	green	9	292281-5	1	24	
292272	Double prong	50 m	106 cm	green	15	292281-5	1	16	

Ref. no.	Description	Ground spike	Colour	Material	Post height	Ø	€
292281-5	Spare Post	Double prong	black	Plastic	106 cm	1/50	
27249-5 H	lead Insulator for Pasture Netting		black	Plastic		1/10/500	
27250-5	Base stopper for pasture netting		black	Plastic		1/10/500	

PoultryNet green

not electrifiable

we recommend the use of electrifiable nets for turkeys and geese

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post		=	€
292279	Double prong	25 m	106 cm	green	8	292281-5	1	24	
292276	Single prong	50 m	106 cm	green	15	292282-5	1	16	
292278	Double prong	50 m	106 cm	green	15	292281-5	1	16	

Ref. no.	Description	Ground spike	Colour	Material	Post height	Ø	€
292282-5	Spare Post	Single prong	black	Plastic	106 cm	1/50	
292281-5	Spare Post	Double prong	black	Plastic	106 cm	1/50	
27249-5 He	ad Insulator for Pasture Netting		black	Plastic		1/10/500	
27250-5 Ba	se stopper for pasture netting		black	Plastic		1/10/500	


TV


Litzclip[®] Net Repair

Litzclip® The new way of repairing nets quickly.


- no tools required for mounting
- continuous electrification
- easy handling
- secure connection



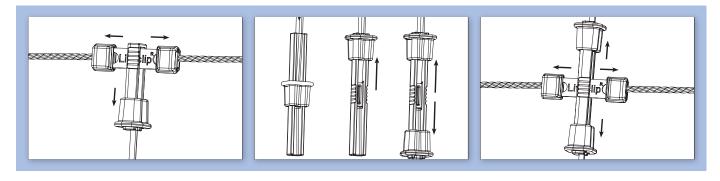


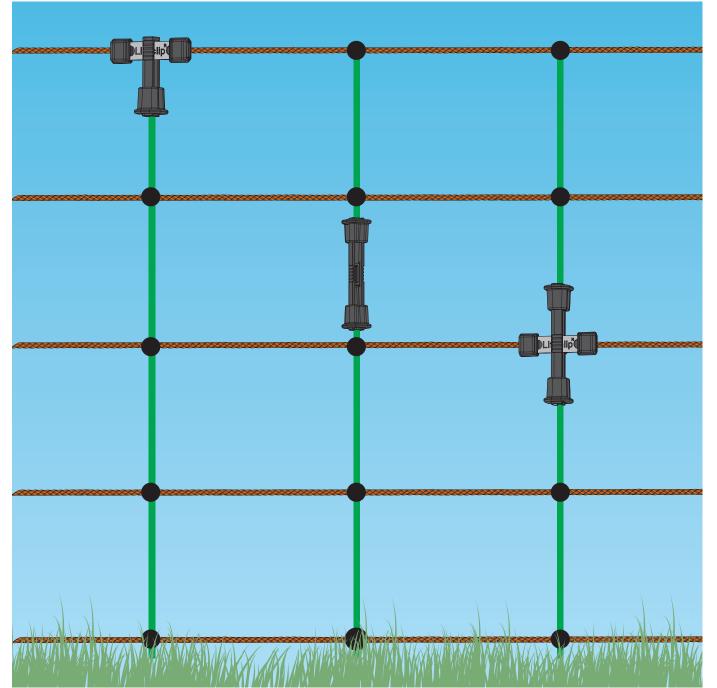

Litzclip[®] Net Repair

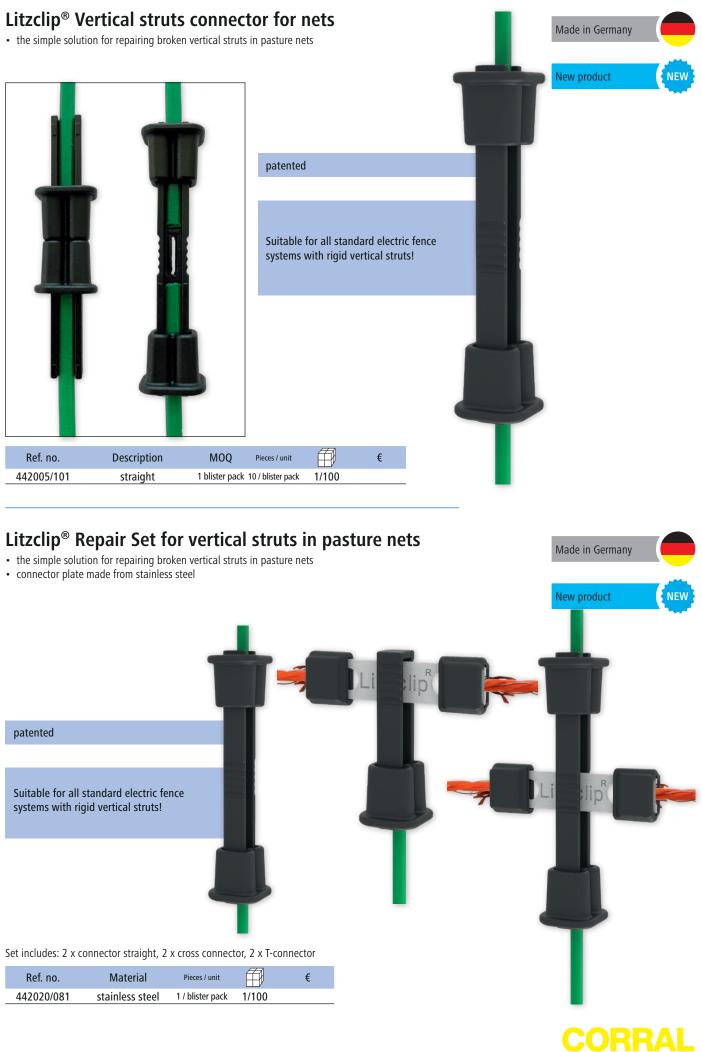

Litzclip[®] Net Repair

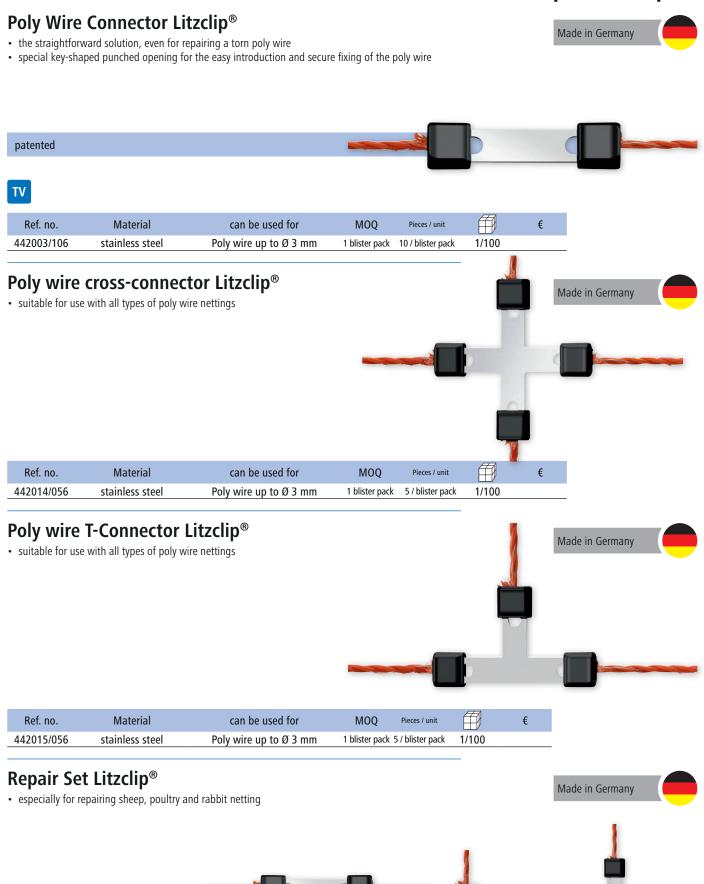

Set includes: incl. 4 x straight 3 mm poly wire connectors, incl. 2 x 3 mm poly wire cross-connectors, incl. 2 x 3 mm poly wire T-connectors

 Ref. no.
 Material
 MOQ
 Pieces / unit
 Image: Comparison of the state of the stat

Net Gates



Door for electric fence nets

can be electrified


Enables quick and easy passage through fence netting. Practical door for your electric netting. Quick and easy to install. Can be installed to any position on the netting - can also be installed subsequently to a fence that has already be set up. The green netting of the door is electrifiable, the stable frame is insulated. When opening the door, the power does not have to be turned off.


- fast and easy to open and close
- low weight, despite being sturdy and robust
- opening width: 86 cm (sufficient for most gardening equipment)
- incl. 2 jumbo standing posts, double-pointed
- electrifiable, incl. cable and connections
- quick and easy installation
- delivery includes connection and connection accessories

446517: suitable for all nets up to 90 cm in height 446518: extra-high version, suitable for a net height of over 95 cm up to 125 cm.



Ref. no.	Description	Width	Height	Ē	€
446517	for nets up to 90 cm	86 cm	105 cm	1	
446518	for nets from 95 - 125 cm	86 cm	125 cm	1	





TV

CORRAL

Cat Netting




Cat Netting


can be electrified


- especially suitable for protecting your pet
- suitable for cats, small dogs, hares and even to protect against wild animals such as martens, raccoons or otters
- extra-narrow mesh in the base area 5 x (5.9 x 5.9 cm) and wider meshes in the upper mesh area 4 x (11.8 x 5.9 cm)
- robust plastic posts with galvanised single prong
- Horizontal current conduction with 3 x 0.20 mm stainless steel conductors per poly wire
- we offer a 3-year warranty against UV damage for all plastic poly wires







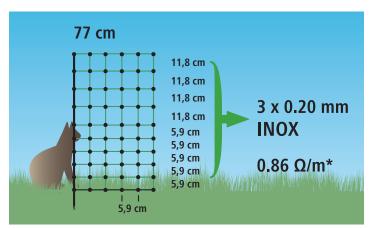



* Based on the total conductor cross-section of all live poly wires in the pasture netting

Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Matching replacement post			€
292199	Single prong	25 m	77 cm	green	9	292210-5	1	40	

Rabbit Netting




Extra small 5.9 cm meshing guarantees highest tending safety

Rabbit Netting

can be electrified

- Horizontal current conduction with 3 x 0.20 mm stainless steel conductors per poly wire
- robust plastic posts with galvanised bottom tip
- we offer a 3-year warranty against UV damage for all plastic poly wires

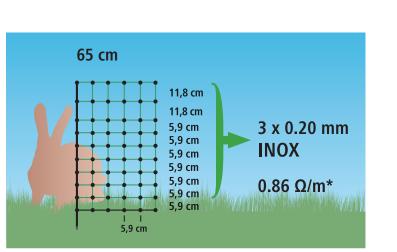

* Based on the total conductor cross-section of all live poly wires in the pasture netting



Ref. no.	Ground spike	Length	Height	Colour	Qty posts	Match	ing replacement post	Ð		€
292209	Single prong	12 m	65 cm	green	9		292210-5	1	70	
292216	Single prong	25 m	65 cm	green	9		292210-5	1	60	
292221	Single prong 50 m 65 cm		green	15	292210-5		1	30		
292222	Double prong	50 m	65 cm	green	15		292211-5	1	30	
Ref. no.	Description		Ground s	pike	Colour	Material	Post height	Ø	€	
292210-5	Spa	are Post		Single pr	ong	black	Plastic	65 cm	1/50	
292211-5	Spa	are Post		Double pr	rong	black	Plastic	65 cm	1/50	
372005	3 V Battery Energis	er Compact I	Power B 40		gr€	en / black			1	
44657	Ground/Support Rod								1	
27249-5	Head Insulator for Pasture Netting					black	Plastic		1/10/500	
27250-5	Base stopper for pasture netting					black	Plastic		1/10/500	

Conductors

There are several points to take into account when selecting the right conductor material. In principle, you have the choice between conductor materials made out of plastic (tapes, wires, ropes) in which the current-leading wires are interwoven with plastic threads and solid wires made from carbide, which are especially suited for fixed fence construction.


When selecting the right wire material, note the resistance in Ohm/m. The smaller this value, the better the material conducts electricity. Our proven TriCond material has high conductivity together with long service life.

Tapes

Tapes offer ideal security for horses - especially 40 mm wide tapes. It is important to ensure the tapes are always fully tensioned and do not sag. The lower the specified resistance in ohm/m on the tape roll, the more electricity flows through the fence to the animal.

Fencing Ropes and Wires

Ropes and wires are used where adverse weather conditions such as wind are commonplace. Ropes have also been shown to be less sensitive in winter snow. Ropes are somewhat easier to install yet offer lower visibility than tapes. The lower the specified resistance in ohm/m on the rope roll, the more electricity flows through the fence to the animal.



You can find all this information on our packaging:









maximum fence length




Брой и материал на проводниците

Conductors

Fence Clip

- for attaching gate handles when gate is open
- · avoids dangerous trip hazards and contamination of conductor material and gate handle
- no power leakage any more from conductor material lying on the ground
- suitable for fencing tape to max. 40 mm width, ropes to 8 mm diameter, and wires
- set consists of 8 clips
- Material: Plastic

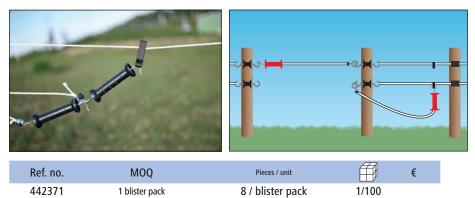



Drop Handles


- · practical aids for easy and safe unrolling of conductor material
- suitable for all spool sizes





One-Hand Drop Aid

- one-handed unrolling of conductor material allows the conductor material to be attached to the insulators at the same time
- for spools of up to 250 mm height and/or weighing up to 3 kg





conductor material not included

Colour

black

Ref. no.

442368

CORRAL

STAR

The STAR product line was designed for the toughest demands in modern animal husbandry. The highest quality materials promise excellent functionality and consistently high tending safety!

Expert tip: to prevent corrosion, we highly recommend the use of stainless steel accessories (connectors, gate insulators, gate handles and other connecting material)

reinforced outer edges = high tear resistance

wire grouping= permanent electrification

Tape STAR

• thick tin-plated copper conductors and strong stainless steel conductors mean that conductivity is 40 times higher than that achieved by traditional conductor materials

5-year warranty of UV stability

- reinforced outer edges strong polyethylene strands increase tear resistance
- wire grouping there is a link of multiple live wires to keep the fence voltage at a constant level through permanent re-electrification

Ref. no.	Length	Width	Colour	max. recom- mended fence length	Resistance	Number of conductors	Stainless Steel Ladder	Tin-plated copper conductor	Break load			€
441501	200 m	12 mm	white / green	9 km	0,21 Ω/m	4	3 x 0,3 mm	1 x 0,3 mm	108 kg	1/12	240	
441502	200 m	20 mm	white / green	20 km	0,1 Ω/m	6	4 x 0,3 mm	2 x 0,3 mm	166 kg	1/6	120	
441503	200 m	40 mm	white / green	40 km	0,05 Ω/m	10	6 x 0,3 mm	4 x 0,3 mm	290 kg	1/6	48	

STAR Line

5-year warranty of UV

5-year warranty of UV

stability

stability

Rope STAR

- very many extra-strong polyethylene strands provide excellent UV resistance, strength and durability
- thick tin-plated copper conductors the copper conductors mean that conductivity is 40 times higher than that achieved by traditional conductor materials



Poly Wire STAR

- strong PE threads provide constantly high breaking strength on your fencing system
- thick tin-plated copper conductors and strong stainless steel conductors mean that conductivity is 40 times higher than that achieved by traditional conductor materials
- wire grouping there is a link of two live wires to keep the fence voltage at a constant level through permanent re-electrification

wire grouping= permanent electrification 400 m Thick PE filaments =Increased breaking load max. recom-Tin-plated Number of Stainless Steel Æ Ref. no. Length Colour mended fence Resistance copper con-Break load conductors Ladder ductor length 44528 400 m white / green 20 km 0,1 Ω/m 6 3 x 0,2 mm 3 x 0,25 mm 77 kg 1/12 96

PROFI

The Profi line guarantees excellent conductivity and long-term durability for medium-sized to long fence systems. The tapes, ropes and wires have 5 x higher conductivity than traditional stainless steel conductors thanks to the use of TriCOND conductor material. This means you can operate 5 x longer fences!

Last years, **TriCond conductive wires** were subjected to intensive tests, in which they displayed a long useful life. The low resistance of TriCOND wires and the resulting high repellent effect offer an excellent cost-performance ratio. It is worth making a comparison (resistance in Ohm/metre <-> price).

TriCOND= 5 x higher conductivity than stainless steel conductors

Strong monofilament fibres =increased fracture load

New TriCOND conductor= excellent conductivity and long service life

4 year UV stability

warranty



Tape PROFI

- very good conductivity
- good visibility
- high quality workmanship
- excellent value for money


Ref. no.	Length	Width	Colour	max. recommen- ded fence length	Resistance	Number of conductors	TriCond Con- ductor	Break load		Ħ	€
59500	200 m	12 mm	white / reo	d 4 km	0,47 Ω/m	4	0,3 mm	90 kg	1/12	240	
59501	200 m	20 mm	white / red	d 6 km	0,31 Ω/m	6	0,3 mm	120 kg	1/12	120	
59502	200 m	40 mm	white / reo	d 10 km	0,17 Ω/m	11	0,3 mm	230 kg	1/6	48	

PROFI Line

4 year UV stability warranty


Rope PROFI

- very good conductivity
- good visibility
- high quality workmanship
- excellent value for money

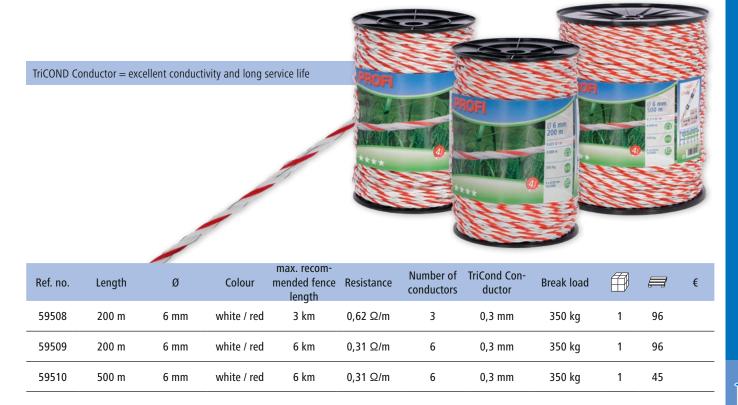

Poly Wire PROFI

- very good conductivity
- higher breaking strength
- high quality workmanship
- excellent value for money





Ref. no.	Length	Colour	max. recommen- ded fence length	Resistance	Number of conductors	TriCond Con- ductor	Break load			€
59511	200 m	white / red	6 km	0,31 Ω/m	6	0,3 mm	100 kg	1/12	360	
59512	400 m	white / red	6 km	0,31 Ω/m	6	0,3 mm	100 kg	1/12	144	
59506	400 m	white / red	9,5 km	0,21 Ω/m	9	0,3 mm	100 kg	1/6	144	

CLASSIC


PCB materials in the CLASSIC line use reinforced stainless steel conductors to ensure excellent conductivity and superlative durability. Particularly suitable for medium-sized fence installations!



Tape CLASSIC

- reinforced stainless steel conductor = excellent conductivity and superlative durability
- Strong monofilament fibres = increased fracture load
- high quality workmanship
- very visible for horses

Ref. no.	Length	Width	Colour	max. recom- mended fence length	Resistance	Number of conductors	Stainless Steel Ladder	Stainless Steel Ladder	Break load		Ħ	€
449103	200 m	10 mm	white	0,6 km	3,58 Ω/m	4	2 x 0,2 mm	2 x 0,3 mm	90 kg	1/12	240	
449101	200 m	20 mm	white	0,8 km	2,56 Ω/m	6	4 x 0,2 mm	2 x 0,3 mm	120 kg	1/12	96	
449102	200 m	40 mm	white	1,6 km	1,21 Ω/m	13	9 x 0,2 mm	4 x 0,3 mm	230 kg	1/6	48	



CLASSIC Line

3 year warranty of UV

stability

Rope CLASSIC

- reinforced stainless steel conductor = excellent conductivity and superlative durability
- Strong monofilament fibres = increased fracture load
- high quality workmanship
- very visible for horses
- good value for money




Poly Wire CLASSIC

• Strong monofilament fibres = increased fracture load

Strong monofilament fibres =increased fracture load

- high quality workmanship
- good value for money





			/	***	**	*	***			ġ
Ref. no.	Length	Colour	max. recommended fence length	Resistance	Number of con- ductors	Stainless Steel Ladder	Break load			€
449114	250 m	white	0,5 km	3,87 Ω/m	6	0,2 mm	80 kg	1/12	432	
449112	500 m	white	0,5 km	3,87 Ω/m	6	0,2 mm	80 kg	1/6	240	
449113	400 m	white	0,8 km	2,58 Ω/m	9	0,2 mm	100 kg	1/6	150	

BASIC

BASIC

BASIC

BASIC

ASIC

The BASIC line features extremely durable, tried-and-tested stainless steel conductors. Particularly attractive prices for shorter fences.

BASIC

Tape BASIC

BASIC

MARRINE TEX

- well-tried stainless stell conductors
- for shorter fence lines and strip-grazing areas

3 year warranty of UV stability

BASIC

Ref. no.	Length	Width	Colour	max. recommen- ded fence length	Resistance	Number of conductors	Stainless Steel Ladder	Break load		€
441520	200 m	10 mm	white	0,2 km	11 Ω/m	4	0,16 mm	60 kg	1/12 240	
441521	200 m	20 mm	white	0,2 km	11 Ω/m	4	0,16 mm	90 kg	1/12 240	
441522	200 m	40 mm	white	0,4 km	5,5 Ω/m	8	0,16 mm	130 kg	1/6 96	
441523	250 m	10 mm	yellow / orange	0,2 km	11 Ω/m	4	0,16 mm	60 kg	1/12 240	
441524	200 m	20 mm	yellow / orange	0,2 km	11 Ω/m	4	0,16 mm	90 kg	1/12 240	
441526	200 m	10 mm	orange	0,2 km	11 Ω/m	4	0,16 mm	60 kg	1/12 240	
441527	200 m	20 mm	orange	0,3 km	7,34 Ω/m	6	0,16 mm	90 kg	1/12 240	
441529	200 m	40 mm	orange	0,55 km	3,67 Ω/m	12	0,16 mm	130 kg	1/6 96	

BASIC Line

Rope BASIC






Ref. no.	Length	Colour	max. recommen- ded fence length	Resistance	Number of conductors	Stainless Steel Ladder	Break load		€
44521	250 m	yellow / orange	250 m	7,74 Ω/m	3	0,2 mm	120 kg	1/12 288	
44833	1.000 m	yellow / orange	250 m	7,74 Ω/m	3	0,2 mm	120 kg	1/6 72	
441595	250 m	orange	150 m	13,78 Ω/m	3	0,16 mm	60 kg	1/20 420	
441596	500 m	orange	150 m	13,78 Ω/m	3	0,16 mm	60 kg	1/12 288	
441597	250 m	white	150 m	13,78 Ω/m	3	0,16 mm	60 kg	1/20 420	
441598	500 m	white	150 m	13,78 Ω/m	3	0,16 mm	60 kg	1/12 288	

Tape Connectors

Made in Germany

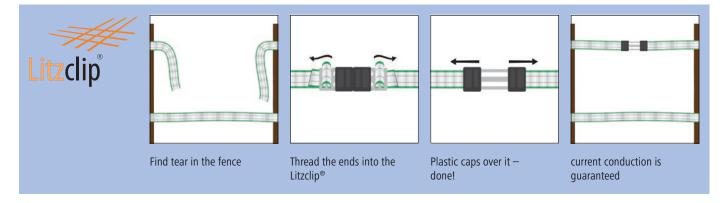


Tape Connectors Litzclip®

- easy connection of 2 tape ends
- the quick solution for repairing torn fence tapes
- special narrow, punched rectangular openings for the easy introduction and securing of the tape

442010/056:

• Only while stocks last!

patented



Tape Connectors

stainless steel

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€
44594	stainless steel	tape up to 13 mm	1 pack	10 / pack	1/10/4.000	
44595	stainless steel	tape up to 20 mm	1 pack	10 / pack	1/10/5.000	
44595/056	stainless steel	tape up to 20 mm	1 blister pack	5 / blister pack	1	
44596	stainless steel	tape up to 40 mm	1 pack	10 / pack	1/10/1.250	
44596/056	stainless steel	tape up to 40 mm	1 blister pack	5 / blister pack	1	


Tape Connectors

galvanised

Ref. no.	Material	can be used for	MOQ	Pieces / unit		€
44570	Steel galvanised	tape up to 13 mm	1 pack	10 / pack	1/10/4.000	
44573	Steel galvanised	tape up to 20 mm	1 pack	10 / pack	1/10/5.000	
44573/056	Steel galvanised	tape up to 20 mm	1 blister pack	5 / blister pack	1	
44572	Steel galvanised	tape up to 40 mm	1 pack	10 / pack	1/10/1.400	
44572/056	Steel galvanised	tape up to 40 mm	1 blister pack	5 / blister pack	1	

Tape Connector Plate

· the new tape connecting plate optimally connects all the electrical wires of two interconnected tapes

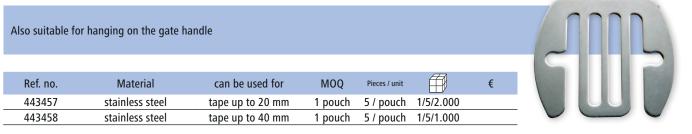





Rope and Poly Wire Connectors

Made in Germany

Made in Germany

Made in Germany

Rope Connectors Litzclip®

- ideal for connecting 2 rope ends of up to 6 mm in diameter
- the quick solution for repairing a torn fence rope
- special key-shaped punched opening for the easy introduction and secure fixing of the rope

442016/106:

• Only while stocks last!



patented

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€	ти
442004/056	stainless steel	rope up to Ø 6 mm	1 blister pack	5 / blister pack	1/100		
442016/106	Steel galvanised	rope up to Ø 5 mm	1 blister pack 1	0 / blister pack	1/100		

Poly Wire Connector Litzclip®

- the straightforward solution, even for repairing a torn poly wire
- special key-shaped punched opening for the easy introduction and secure fixing of the poly wire

patented					-
Ref. no.	Material	can be used for	MOQ Pieces / unit	Ø	€ TV
442003/106	stainless steel	Poly wire up to Ø 3 mm	1 blister pack 10 / blister pack	1/100	

Safety Link for rope Litzclip®

The rope opens at the rope break point in panic situations, reducing the risk of injury to your horse.

IMPORTANT: Reduced risk of injury for your horse, and also reduced pulling force on the rope!

Included in delivery: 6 x Safety Link, 6 x Replacement Security Buttons

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€		
442008/066	stainless steel	rope up to Ø 6 mm	1 blister pack	6 / blister pack	1/100			
Ref. no.	Description	Colou	ır	Material	MOQ	Pieces / unit	Ø	€
442009/066	Replacement security k	outtons blac	k	Plastic	1 blister pack	12 / blister pack	1/100	



Rope and Poly Wire Connectors



Quick rope/poly wire connector Premium

- allows ropes, wires and tapes of up to 10 mm to be connected to gate insulators and handles quickly and easily, resulting in a connection with optimal electrical conductivity
- made from stainless steel, guaranteeing excellent corrosion resistance
- no tools required

stainless steel

patented

The benefits: No need for tools, easy to create an optimum electrical connection using fixing screw. Also ideally suitable for tensioning.

Ref. no.	Material	can be used for	MOQ	Pieces / unit		€
441285/046	stainless steel	Poly wire, rope up to Ø 8 mm, tape up to 10 mm	1 blister pack	4 / blister pack	1	

Quick rope/poly wire connector

- allows ropes, wires and tapes of up to 10 mm to be connected to gate insulators and handles quickly and easily, resulting in a connection with optimal electrical conductivity
- no tools required

patented





New product

NEW


The benefits: No need for tools, easy to create an optimum electrical connection using fixing screw. Also ideally suitable for tensioning.

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€
441209/046	metal galvanised	Poly wire, rope up to Ø 8 mm	1 blister pack	4 / blister pack	1	

Rope and Poly Wire Connectors

Angle clamp

• ideal for connecting and the electrical cross-connection of cables

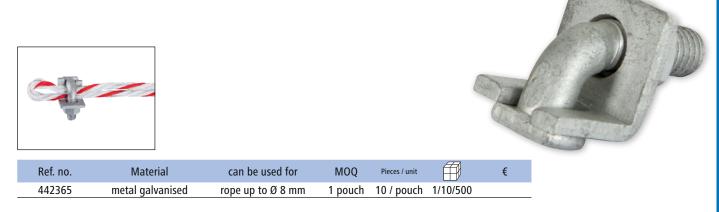

Rope and Poly Wire Connectors

- safe mechanical and electrical connection
- easy to mount with a screw driver



Ref. no. Material can be used for MOQ Pieces / unit 441561 metal galvanised Poly wire up to Ø 2.5 mm 1 pouch 10/ pouch 1/10/100 441561/056 metal galvanised Poly wire up to Ø 2.5 mm 1 blister pack 5 / blister pack 1 441560 metal galvanised Poly wire up to Ø 2.5 mm 1 blister pack 5 / blister pack 1							
441561/056 metal galvanised Poly wire up to Ø 2.5 mm 1 blister pack 5 / blister pack 1	Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€
	441561	metal galvanised	Poly wire up to Ø 2.5 mm	1 pouch	10 / pouch	1/10/100	
441ECO motel columnicad reno un to QCE mm 1 nouch 10/nouch 1/10/100	441561/056	metal galvanised	Poly wire up to Ø 2.5 mm	1 blister pack	5 / blister pack	1	
441560 metal galvanised rope up to 0 6.5 mm i pouch 107 pouch 1710/100	441560	metal galvanised	rope up to Ø 6.5 mm	1 pouch	10 / pouch	1/10/100	
441560/056 metal galvanised rope up to Ø 6.5 mm 1 blister pack 5 / blister pack 1	441560/056	metal galvanised	rope up to Ø 6.5 mm	1 blister pack	5 / blister pack	1	

Rope Connectors

stainless steel



Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ē	€
44540	stainless steel	rope up to Ø 8 mm	1 pouch	10 / pouch	1/10/100	
44540/056	stainless steel	rope up to Ø 8 mm	1 blister pack	5 / blister pack	1	

Rope Connectors

galvanised





Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ð	€
44535	metal galvanised	rope up to Ø 8 mm	1 pouch	10 / pouch	1/10/500	
44535/056	metal galvanised	rope up to Ø 8 mm	1 blister pack	5 / blister pack	1/40	



Polywires

Poly Wire Steuer

The ORIGINAL

- excellent tear resistance
- excellent conductivity thanks to 2 x 0.5 mm galvanised iron wires
- safe voltage transfer to the animal thanks to external metal wires throughout



Ref. no.	Length	Colour	max. recommen- ded fence length	Resistance	Number of conductors	Galvanised Iron Wire	Break load		Ħ	€
445025	500 m	transparent	6 km	0,36 Ω/m	2	0,5 mm	45 kg	1	200	
445035	1.000 m	transparent	6 km	0,36 Ω/m	2	0,5 mm	45 kg	1	120	

Monowire EconomyLine

- 2 hot galvanised steel wires of 0.50 mm wrapped around 1 nylon core of 1.40 mm
- very good conductivity



Ref. no.	Length	Colour	max. recommen- ded fence length	Resistance	Number of con- ductors	Galvanised Iron Wire	Break load		€
44502	500 m	transparent	6 km	0,35 Ω/m	2	0,5 mm	45 kg	1/8 192	
44503	1.000 m	transparent	6 km	0,35 Ω/m	2	0,5 mm	45 kg	1/4 120	



The permanent fence

Stationary fences are also characterised as permanent fencing and are used for several years as reliable security for your animals. This type of fence is especially low-maintenance because of the long-lasting and robust materials used in the construction of permanent fencing.

They are frequently built with recycled posts, metal T-posts and solid wood posts that are anchored deep into the ground. A stable construction is required, especially in corners and junctions, because of the high tensile forces on the material. Mobile fence variants also have their own conductor material. Here we recommend using our Premium Horse Wire (44873) or Special Steel Wire for fixed fences (445055). We have also developed practical de-tensioning and corner solution sets that make the construction of a stationary fence so much easier.

Fence Wires

10

Iron Wire

- very good conductivity
- proven in fence construction for decades
- optimum current output upon animal contact



445041 322 m no reel 1,6 mm 0,07 Ω/m 95 kg 1/5 100 44504 250 m no reel 1,8 mm 0,05 Ω/m 110 kg 1/5 100 445042 200 m no reel 2 mm 0.04 Ω/m 140 kg 1/5 100	Ref. no.	Length	Description	Ø	Resistance	Break load		€
	445041	322 m	no reel	1,6 mm	0,07 Ω/m	95 kg	1/5 100	
445042 200 m no reel 2 mm 0.04 Ω/m 140 kg 1/5 100	44504	250 m	no reel	1,8 mm	0,05 Ω/m	110 kg	1/5 100	
	445042	200 m	no reel	2 mm	0,04 Ω/m	140 kg	1/5 100	

Special Steel Wire for Permanent Fencing

- zinc/aluminium alloy for long lasting protection
- ninefold protection against corrosion compared to galvanized wire
- extremely good conductivity
- ideal for permanent fence installations
- optimum current output upon animal contact



10-year guarantee

Ref. no.	Length	Description	Ø	Resistance	Break load		€
445055	1.000 m	no reel	2 mm	0,06 Ω/m	345 kg	1 40	
44505	625 m	no reel	2,5 mm	0,035 Ω/m	650 kg	1/20 40	

Wire Dispenser Vario

- trouble-free unrolling of permanent fencing wire
- robust square pipe design
- suitable for all wire coils or spools with an inner diameter of 30 85 cm
- steplessly adjustable
- easy tool-free assembly and disassembly, collapsible for transport

€

- · additional ground plate prevents the wire dispenser sinking into soft ground
- Material: metal galvanised





Wire Dispenser

Ħ

1


- · trouble-free unrolling of permanent fencing wire
- also suitable for Premium Horse Wire
- for floor mounting

Ref. no.

442372

• Material: metal galvanised

Ref. no.		€
441875	1/6	





Fence Wires

Stranded Wire

- 7 strands
- very flexible, easy to install
- multi-use, e.g. for wildlife control





Ref. no.	Length	Description	Ø	Resistance	Break load			€
44500	200 m	no reel	1,5 mm	0,12 Ω/m	200 kg	1	400	
445009	1.000 m	on a coil	1,5 mm	0,12 Ω/m	200 kg	1	60	

Fence Wire ALU GUARD

- excellent conductivity, 4 times higher than conventional steel wire
 easy to handle during installation
 low weight (by 2/3 less than steel wire)
 increased breaking load through the addition of magnesium



Ref. no.	Length	Description	Ø	Resistance	Break load	Ð		€
445002	400 m	on a coil	1,6 mm	0,03 Ω/m	70 kg	1/4	168	
445007	400 m	on a coil	1,8 mm	0,023 Ω/m	90 kg	1/4	144	
445003	400 m	on a coil	2 mm	0,02 Ω/m	110 kg	1/4	120	



Wire Connectors



Wire Connectors Wire Link

Sturdy wire connector allows the connection of two wires without tools. The wire is simply pushed into the opening and cannot free itself without intervention.

into the oper	ning and cannot fr	ee itself without intervention.					
		protruding wire ends - ideal for horse se Wire or TopLine Horse Wire					1
Ref. no.	Material	can be used	for	MOQ	Pieces / unit	Ħ	€
442367	Aluminium	steel wire 1.8 - 2.5 mm, Premium Hor	se Wire, TopLine Horse Wire	1 pouch	2 / pouch	1/200	
• for the saf	onnecting e, vertical connect nd cable with the	tion of fixed fence wire series and/or the					

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€
441225	metal galvanised	steel wire up to 2.5 mm, Premium Horse Wire, TopLine Horse Wire	1 pouch	10 / pouch	1/10/500	

44707

Wire connecting clamp

• suitable for the electrical cross-connection of multiple wires

			de la				1
Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€	
442364	metal galvanised	steel wire up to 2.5 mm	1 pouch	10 / pouch	1/10/500		

Gripple Wire Connectors

• the Gripple system repairs fences 6 x faster than conventional connectors

Ref. no.	can be used for	Operating load	МС	Q	Pieces / unit	Ð	€
44707	steel wire 1.4 - 2.2 mm	220 kg	1 pa	ack	20 / pack	1/20/300	
44706	steel wire 2.0 - 3.25 mm	400 kg	1 pa	ack	20 / pack	1/20/200	
44706/066	steel wire 2.0 - 3.25 mm	400 kg	1 bliste	r pack	6 / blister pack	1	
Ref. no.	Description		Ø	€	E GRII	DP/ F°	
44703	collet chuck with voltme	eter	1/4				





CORRAL



Fence Wires

Polyethylene polymer

The area between the conductive material is surrounded by a sheath of white UV-stabilised polyethylene.

Electrically conductive plastic

The steel wire is enclosed by a layer of electrically conductive carbon fibre plastic mix that reaches up to the surface through three lines.

Steel Wire inside there is a special steel wire of 2.5 mm thickness

10-year guarantee

10

Premium Horse Wire

Our most durable electrifiable horse fencing system! Premium Horse Wire provides a very strong mechanical barrier thanks to the 2.5 mm thick steel wire. The electrically conductive white/black plastic protects the interior steel wire from the weather and resists a breaking load of up to 800 kg. Its round shape and smooth surface mean cuts from the conductor material are avoided.


- great conductivity 0.035 Ohm/m
- high mechanical barrier due to steel wire (breaking strength 800 kg)
- electrifiable and very safe
- extremely weather-proof (cold, warmth, moisture)
- · very good visibility due to high proportion of white
- UV-Stabilised PE Covering
- no physical hazard for horses due to round and smooth surface



Tip: Use our 'Wire LINK' (442367) for connection

Ref. no.	Length	Ø	Resistance	Break load	Ø		€
44873	250 m	8 mm	0,035 Ω/m	800 kg	1	20	

Fence Wires



electrically conductive plastic

The iron wire is enclosed by a layer of electri-

cally conductive carbon fibre plastic mix that

reaches up to the surface through three lines.

Iron Wire inside there is a galvanised iron wire of 2 mm thickness

New product

polyethylene.

Polyethylene polymer

The area between the conductive material is

surrounded by a sheath of white UV-stabilised

NEW


5-year warranty



TopLine Horse Wire

Our proven electrifiable horse fencing system is now also available in a reduced diameter version. In the consistent ongoing development of our Premium Horse Wire, we focussed on the ease of applying the fence system while retaining the high quality materials and workmanship.

- low resistance of 0.055 ohms/m, meaning very high conductivity through 2 mm galvanised iron wire
- the reduced diameter of case and wire makes the product softer and more flexible, thus easier to work with
- · extremely weather-resistant and durable
- no physical hazard for horses due to round and smooth surface



Ref. no.	Length	Ø	Resistance	Break load			€
442390	200 m	6 mm	0,055 Ω/m	400 kg	1	25	







1

De-tensioning Set "horizontal"

• for tensioning posts with a diameter of up to 160 mm

Set includes: 1 x insulation (polyamide), 1 x stainless steel temperature equalisation spring, 1 x permanent wire tensioner (without clamping lever), 1 x stainless steel wire rope loop for fast and easy attachment to the tension post



Ref. no. can be used for Æ £ 446509 steel wire, Premium Horse Wire, TopLine Horse Wire 1/20 Ħ Ref. no. Description Colour Length MOQ Pieces / unit 446506 Protective Hose for temperature equalisation spring black 50 cm 1 pack 3 / pack 1/10

2

De-tensioning Set "diagonal"

Set for the diagonal de-tensioning of an H post design in the corner and at the fence start and/or end for very high tensile forces of the conductor material.

Set includes: 1 x hose insulator, 1 x stainless steel wire rope loop, 1 x permanent wire tensioner (without clamping lever), 2 x 90° metal brackets and wood screws


Ref. no.	can be used for		€
446508	steel wire, Premium Horse Wire, TopLine Horse Wire	1/10	



3

Corner Solution for Premium Horse Wire Set of 3

- for corner posts with a diameter of up to 160 mm
- Suitable for: steel wire, Rope, Premium Horse Wire, TopLine Horse Wire

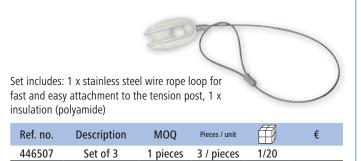

4

Plug Connector Easy-Loop

- for easy stopping at the last post
- Material: Plastic
- clip-on
- Suitable for: Premium Horse Wire, TopLine Horse Wire



Ref. no.	Colour	MOQ	Pieces / unit	Ø	€
446519	white	1 pouch	10 / pouch	1/10/500	

Staples

• Material: metal galvanised





Porcelain Corner Insulators

Width

3,8 mm

MOQ

1 pouch

50 / pouch

1/20

- professional corner insulator made of porcelain
- high-quality

Ref. no.

44394

• withstands extreme tensile loads

Length

47 mm

- for hanging
- Length: 42 mm

Ref. no.	Colour	MOQ	Pieces / unit			€
442362	white	10 pieces	10 / box	1/10/200	8.000	

Porcelain Strain Insulator

- extremely durable starting and end insulator for fence wires
- withstands extreme tensile loads
- Material: Porcelain
- for hanging

	10-year guarantee	
-		
	-	

Ref. no.	Colour	MOQ	Pieces / unit		€
442363	white	1 box	10 / box	1/10/200	

Porcelain Corner Insulators

incl. wire rope with eyelet in set of 3

- user-friendly corner solution for all types of fence wire
- professional corner insulator made from porcelain incl. stainless steel wire loop for easy and quick installation on the corner post
- · withstands extreme tensile loads
- suitable for corner posts with a diameter of up to 160 mm
- for hanging

Ref. no.	Colour	Ø	€
446504	white	1/20	

Hose Insulator

- Polyethylene pipe as insulation corner solution in the permanent fence
- nail on with staples 44394 (not included)
- Suitable for: rope up to Ø 8 mm, Premium Horse Wire, TopLine Horse Wire

Ref. no.	Colour	Length	Ø	MOQ	Pieces / unit	Ø	€
44392	white	60 cm	8 mm	1 pouch	10 / pouch	1/10	



10

CORRAL



Temperature Equalisation Spring

- stable design for steel wire
- eases strain on wire and corner posts ٠
- balances temperature variations and renders the fence flexible
- protective tube prevents horse hair being trapped in the spring



Ref. no.	Length	Ø	Material	can be used for	Ø	€				446506	
44704	43,5 cm	43 mm	metal galvanised	steel wire 2.5 mm	1/20		and the second second	and the second se		440500	
44705	43,5 cm	43 mm	stainless steel	steel wire 2.5 mm	1/20				-		
44259	20 cm	25 mm	stainless steel	steel wire 1.6 mm	1/60						
Ref. no.			Description		Colour	Lengt	h MOQ	Pieces / unit		€	
446506	Pr	Protective Hose for temperature equalisation spring		black	50 cn	n 1 pack	3 / pack	1/10			

Wire tensioner

- rotatable
- tightens/loosens rapidly wires, ropes and poly wires without cutting them in two

Ref. no.	Material	MO	Q Pieces / unit	Ø	€
44513	metal			1/25	
44513/036	metal	1 blister	pack 3 / blister pack	1	
Ref. no.	Descriptio	on	Material	Ð	€
44514	Tension A	rm ı	netal galvanised	1/20	




441327

441328

Gear-toothed wire tensioner • tightens/loosens rapidly wires, ropes and poly wires • with cliplock 44509 441297 Ø Ref. no. Description Material € 44509 1/50 single metal 441327 with integrated insulator 1/20 metal

441297	with integrated insulator and wire rope metal	1/10		_
Ref. no.	Description	Ð	€	
441328	Clamping Lever for permanent wire tensioner	1/20		

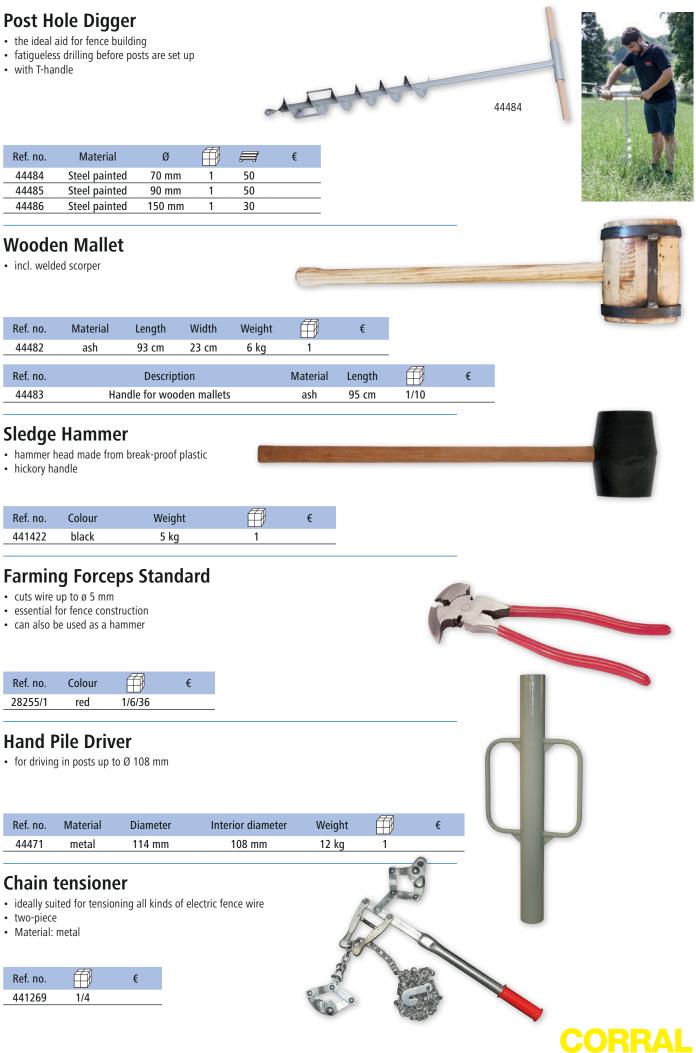

The T-Post System

High-quality, easy-installation T-posts in various lengths for long-term use. The entire post is covered in nubs spaced at intervals of 5.5 cm for attaching accessories. A robust base plate gives the post a secure footing. The paint on the posts guarantees high weather resistance. We recommend using T-posts that are approx. 30 cm longer for each corner. The insulators can be fixed securely at the desired height by clipping them to the T-post.

Raw materials

Our T-Post is made from prepared, hot-rolled rail steel, which is one of the strongest and most durable types of steel. Due to its extreme rigidity, this steel will only become minimally deformed even under the highest stress and is therefore the best choice for the construction of semi-permanent fence systems and fixed fences. The typical green paint also protects the stable rail steel of the T-Posts from the influences of weather. The entire post is covered in nubs spaced at intervals of 55 mm to enable the set-up of fences of various heights. This enables the easy attachment of a wide range of insulators for all conductor materials, tool-free and at any height.

Assembly

The T-post can be installed by just one person with the help of a specially developed pile driver (446540). Here, please bear in mind that the posts must be driven sufficient deep to ensure that the entire 18 cm-long anchor plate (drive-in depth approx. 40 cm) is sunk into the ground.

T-post profile

T-posts are suitable for all types of pasture, as a supplemental fence for rotational grazing, as a semi-permanent paddock fence, and as a way to fence in an outlet.


Metal Post T-Post

- with solid base plate
- drive into the ground about 40 cm $\,$
- · perfect for horses, cattle and wild animal fences







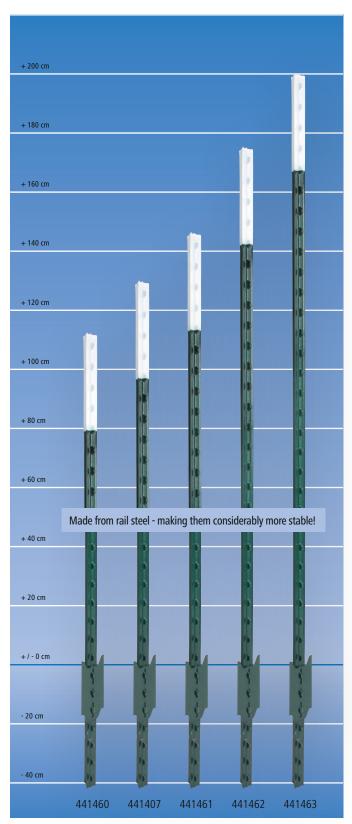


Ref. no.	Colour	Total height			€	
441460	green / white	152 cm	1/5	200		
441407	green / white	167 cm	1/5	200		
441461	green / white	182 cm	1/5	200		• •
441462	green / white	213 cm	1/5	200		• ••
441463	green / white	240 cm	1/5	200		• ••

Variable Corner Solution Set T-Post

Installation of a corner with T-posts

- Drive the corner post approx. 40 50 cm into the ground...
- Drive in both additional corner and stretch posts using a spacing of 1.50 m each...
- Remove the base plates from both diagonal support posts...
- Install the corner solution set on the corner posts...
- Attach the diagonal support posts to the sleeve and align them.

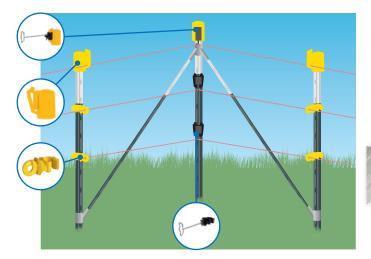


Set includes: 1 x corner bracket universal, 4 x two brackets for diagonal brace incl. fixing screws and caps, incl. fitting instructions

Ref. no.	Ħ	€
441177	1/6	

Fence Starter Set T-Post

Installation of a fence starter with T-posts


- Drive the gate or junction post approx. 40 50 cm into the ground...
- Drive in the next track post using a spacing of 1.50 m...
- Remove the base plates from the diagonal support post...
- Install the fence starter set on the gate or junction post and on the track post...
- Attach the diagonal support post to the sleeve and align it.

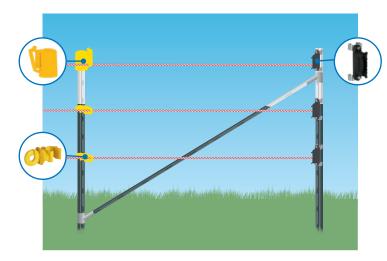


Set includes: 2 x brackets for diagonal strut, incl. fastening screws and protective caps

Ref. no.	Ø	€
441178	1/12	



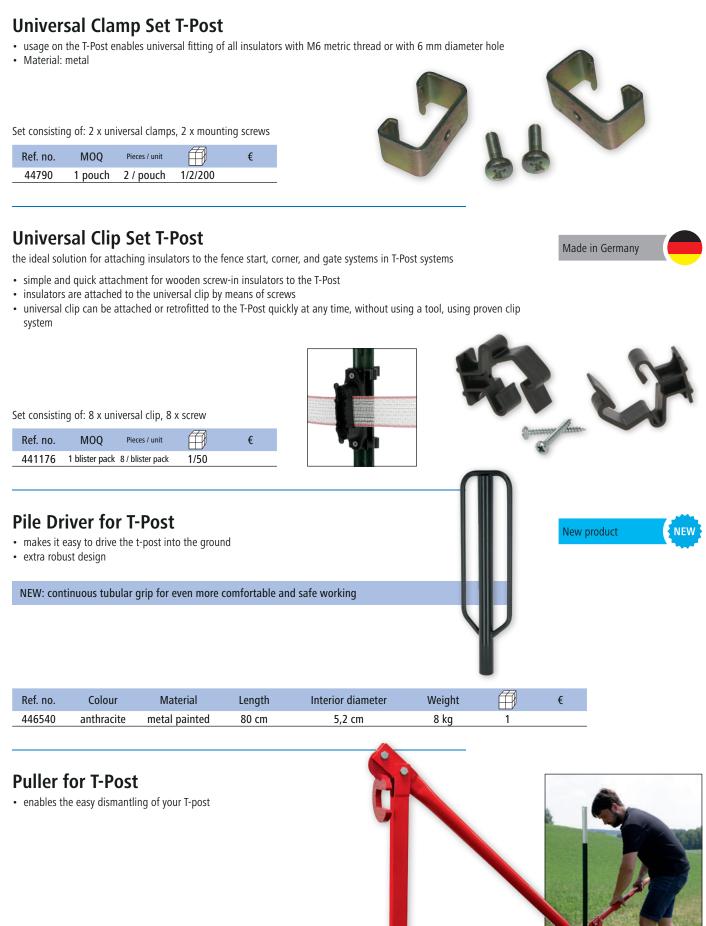



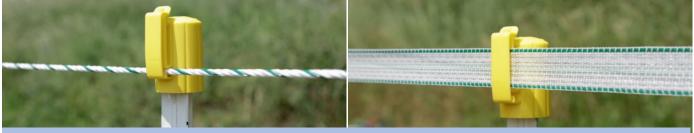

The ideal solution for preventing the conductor material touching the diagonal support posts in the corner structure.

Head Insulator T-Post

- new design with improved post support
- can be extended with corner solutions for tapes and ropes
- avoids injuries to animals at the post end
- Material: Plastic UV-stabilised
- clip-on
- Suitable for: Wire, Poly wire, Rope, tape up to 40 mm



New product

NEW

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
441252	black	1 pouch	10 / pouch	1/10/200	2.400	
441253	yellow	1 pouch	10 / pouch	1/10/200	2.400	



We recommend use in combination with a post top insulator

Head Insulator Tape/Rope Corner Solution T-Post

- the highest quality with a stainless steel frame
- conductor material is protected by rounded edges
- Suitable for: Poly wire, Rope, tape up to 40 mm

NEW: stainless steel brackets now universally applicable for wire, rope and tape up to 40 mm

Included in delivery: 4 x head insulators, 4 x spacers, 4 x clips

Ref. no.	Colour	Support length	MOQ	Pieces / unit	Ð	€
446536	yellow	15 cm	1 pouch	4 / pouch	1/25	
446537	black	15 cm	1 pouch	4 / pouch	1/25	

Head Insulator T-Post

- avoids injuries to animals at the post end
- Material: Plastic
- clip-on
- Suitable for: Wire, Poly wire, Rope, tape up to 40 mm

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
441267	black	1 pouch	10 / pouch	1/10/200	2.400	
441268	yellow	1 pouch	10 / pouch	1/10/200	2.400	



Ring Insulator T-Post

- improved clip system simplifies fastening to the T-post
- Material: Plastic
- Suitable for: Wire, Poly wire, Rope, tape up to 10 mm

Ref. no.	Colour	MOQ	Pieces / unit			€
441180	black	1 pouch	25 / pouch	1/25/200	6.000	
441181	yellow	1 pouch	25 / pouch	1/25/200	6.000	

Tape Insulator T-Post

- improved clip system simplifies fastening to the T-post
- Material: Plastic
- Suitable for: tape up to 50 mm, Rope

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
441183	black	1 pouch	25 / pouch	1/25/200	6.000	
441184	yellow	1 pouch	25 / pouch	1/25/200	6.000	

Pinlock Insulator T-Post

- · improved clip system simplifies fastening to the T-post
- Material: Plastic
- Suitable for: Rope, Poly wire, Wire, tape up to 10 mm

Ref. no.	Colour	MOQ	Pieces / unit	Ð		€
441186	black	1 pouch	25 / pouch	1/25/200	6.000	
441187	yellow	1 pouch	25 / pouch	1/25/200	6.000	

Rope Insulator T-Post

- extra robust design
- improved clip system simplifies fastening to the T-post
- Material: Plastic
- Suitable for: Wire, Poly wire, rope up to Ø 8 mm, tape up to 10 mm

Ref. no.	Colour	MOQ	Pieces / unit			€
441189	black	1 pouch	25 / pouch	1/25/200	7.200	
441190	yellow	1 pouch	25 / pouch	1/25/200	7.200	

Distance Insulator T-Post

- distance between wires 12.5 cm
- simplifies fastening to the T-post
- Material: Plastic
- Suitable for: Wire, Poly wire, Rope, tape up to 10 mm

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
442343	black	1 pouch	25 / pouch	1/25/300	2.400	
442344	yellow	1 pouch	25 / pouch	1/25/300	2.400	









T-Post and Accessories

New product

NFW

Tape/Rope Corner Solution T-Post

the ideal solution for T-Post corners for fencing ropes and tapes

- the highest quality with a stainless steel frame
- · conductor material is protected by rounded edges
- Suitable for: Poly wire, Rope, tape up to 40 mm



Gate Insulator T-Post Vario



Set consisting of: 3 x gate insulators, 3 x stainless steel connecting plates each with 3 connection options

Ref. no.	Colour	MOQ Pieces / unit	Ø		€
446516	black	1 blister pack 3 / blister pack	1	352	

Tape Gate Insulator Set Profi T-Post

- a robust tape insulator with stainless steel connecting plate for gate handle and pasture fence connection
- clip-on with universal clamps
- Suitable for: Rope, tape up to 40 mm






Set consisting of: 2 x insulators with stainless steel plate, 4 x T-post universal clamp

Ref. no.	Colour	MOQ	Pieces / unit	Ð		€
441494	black	1 blister pack 2	? / blister pack	1	320	

Tape, Rope and Corner Insulator T-Post

- clip-on with universal clamps
- Suitable for: Poly wire, Rope, tape up to 40 mm





Set consisting of: 4 x prof corner/stretch Insulator, 8 x universal clamps

Ref. no.	Colour	MOQ	Pieces / unit	Ē		€
441232	black	1 blister pack	4 / blister pack	1	120	

Rope Corner Insulator T-Post

- clip-on with universal clamps Suitable for: Poly wire, Rope, tape up to 10 mm

Set consisting Ref. no.	of: 4 x rope ir Colour	nsulator, 4 x u MOQ	niversal clamp Pieces / unit	s	€			5		
441233	black		4 / blister pack	1/100	£					
		· ·	· · ·							
Gate In: • clip-on with										
Set consisting	of: 4 x gate ir	nsulators, 4 x	universal clam	ps			C			
Ref. no.	Colour	MOQ	Pieces / unit	F	= (E		10		
441231	black	1 blister pack	c 4 / blister pack		900					
 extra strong no slipping Material: Po with metric 	g finish made of the conduc olyamide thread	from polyamic tive material	de plastic (PA) on the metal s	upport thanks t	to the insulator	's special sha	pe	_4		9
 extra strong no slipping Material: Pe with metric with contin Suitable for 2 nuts inclu 	g finish made of the conduc olyamide : thread uous galvanis r: Rope, Poly w uded nps (44790) no	from polyamic tive material ed support Ø rire, Wire bt included.	de plastic (PA) on the metal s 8 mm				<u> </u>			
 extra strong no slipping Material: Pe with metric with contin Suitable for 2 nuts inclu Universal clam Ref. no. 	g finish made of the conduc olyamide thread uous galvanis r: Rope, Poly w ided nps (44790) no Colour	from polyamic tive material ed support Ø vire, Wire ot included.	de plastic (PA) on the metal s 8 mm	read length	ΜΟQ	Pieces / unit	}=(]=		€	
 Material: Performance with metric with contin Suitable for 2 nuts inclu Universal clan 	g finish made of the conduc olyamide : thread uous galvanis r: Rope, Poly w uded nps (44790) no	from polyamic tive material ed support Ø rire, Wire bt included.	de plastic (PA) on the metal s 8 mm		ΜΟQ		}=(]=		€	

Universal clamps (44790) not included.

Ref. no.	Colour	Thread	Thread length	MOQ	Pieces / unit	Ø		€
441377	black	M6	30 mm	1 pouch	10 / pouch	1/10/250	4.500	




Wooden Posts for Permanent Fencing



Octo Wood

- the Octo Wood post with the ingenious octagonal profile made of Pinius Silvestris = pine wood
- thus provides simple mounting without pre-drilling
- this post is also well-suited for erecting a wooden fence
- furthermore, the octagonal profile also ensures a secure rest in pallets and allows for excellent transportation without rolling
- highly effective high-pressure treatment as per use class 4, preventive protection against insects, fungi and soft rot
- · suitable for continuous earth and water contact
- sensational 10-year warranty!



Heartwood

Even growth rings = even growth

- Does not have to be impregnated
- Contains the natural fungus inhibitor 'pinosylvin'
- Has resin channels throughout
- 'Dead' wood
- · Lends the post rigidity

Sapwood

Close growth rings=Slow growth

- Only the sapwood part is impregnated
- The membrane of the wood fibre cell is coated in a copper sulphate layer
- Impregnated with Wolmanit CX in a pressure tank process

10-year guarantee



Raw materials

OctoWood uses only slow-growing Scandinavian pine grown north of 64 degrees latitude:

- Low temperatures
- Not much daylight
- Smaller tree crowns
- Straight trunk
- High rigidity
- · High breaking load

With its 8 sides, the wooden post with ingenious octagonal profile of pine wood (Pinius Sylvestris) enables flexibility when fitting insulators. The most commonly used fence post is available in different lengths as well as different diameters, allowing it to be used in any fence system. Pine wood is not a hardwood and is therefore easy to work with.

Wooden Posts for Permanent Fencing



Ideal for com	ner, gate, first and last posts						
Ref. no.	Description	Total height	post ø	Ø		€	
441827	Corner / Gate Post	210 cm	140 mm	1	48		. .
441828	Corner / Gate Post	250 cm	140 mm	1	48		. .
441820	Track Post	150 cm	60 mm	1	252		•
441821	Track Post	200 cm	60 mm	1	252		
441822	Track Post	180 cm	80 mm	1	154		• ••
441823	Track Post	200 cm	80 mm	1	154		• ••
441824	Track Post	225 cm	80 mm	1	154		•
441825	Track Post	200 cm	100 mm	1	99		
441826	Track Post	225 cm	100 mm	1	99		• ••
Ref. no.	Description	Height 🗐	€	The Octo Wo			,

Ref. no.	Description	Height		€	Ine O
441835	Cross Bar Octo Wood	350 cm	1		for co

Octo Wood cross bar (441835) is ideal construction of horse-riding courses



Recycled Posts



Recycling Post Round Profile

- extremely durable
- optimal processing possible (screwing, nailing, sawing, drilling)
- fully insulated
- sharpened on one side
- drive into the ground about 50-60 cm deep
- tried-and-tested round profile
- ground water-neutral
- well suited for soft, moist or deep grounds
- rot-proof

Ref. no.	Total height	post ø	Ø		€	
44460	130 cm	45 mm	1	165		P
44462	150 cm	50 mm	1	300		•
44463	150 cm	60 mm	1	125		P.
44474	185 cm	60 mm	1	125		P
442071	200 cm	70 mm	1	74		Ģ
44465	180 cm	75 mm	1	60		P
44467	200 cm	75 mm	1	60		• •
44469	220 cm	100 mm	1	33		P

ideal as a track post

Recycling Post Square Profile

- practical square profile
- well suited for soft, moist or deep grounds
- extremely durable
- optimal processing possible (screwing, nailing, sawing, drilling)
- fully insulated
- ground water-neutral
- rot-proof

ideal as a track post

Ref. no.	Total height	post ø	Ø		€	
442057	175 cm	70 x 70 mm	1	55		• ••
44478	175 cm	90 x 90 mm	1	45		- P
44477	200 cm	90 x 90 mm	1	45		• •




10

10-year guarantee



126

Recycled Posts

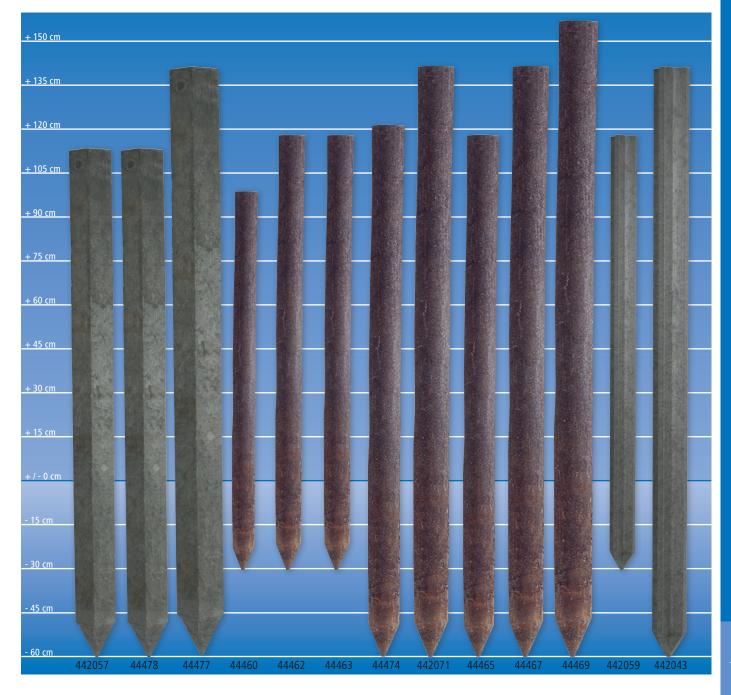

Recycling Post Cross Profile

- well suited for soft, moist or deep grounds
- very sturdy cross profile
- extremely durable
- optimal processing possible (screwing, nailing, sawing, drilling)
- fully insulated
- sharpened on one side
- ground water-neutral
- rot-proof





10-year guarantee

10

ideal as a track post


Ref. no.	Total height	post ø	Ø	Ħ	€	
442059	150 cm	70 x 70 mm	1	120		• ••
442043	200 cm	70 x 70 mm	1	55		• ••

CORRAL

Fibreglass Posts



Plastics that are reinforced with glass fibres have a number of significant advantages when compared to other materials such as steel, iron or simple plastic. The combination of plastic and glass fibres demonstrates significantly better properties when it comes to stability and resistance than conventional plastic. Moreover, our fibreglass posts are very lightweight and cannot rust or rot, making them ideal for outdoor use.

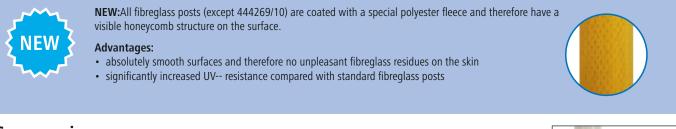

Spare spring

Round Fibreglass Post

- for fibreglass rods of diameter 10 mm
- for poly wires, ropes and wires
- variable adjustment of pole eyelet
- Material: stainless steel

Ref. no.	MOQ	Pieces / unit		€
444265/30	1 pouch	30 / pouch	1/30/1.500	

Plastic Eyelets

for round fibreglass post

- variable adjustment of pole eyelet
- clip-on
- Suitable for: Wire, Poly wire, Rope, tape up to 10 mm

Ref. no.	Description	Colour	MOQ	Pieces / unit		€
444011	for fibreglass rods of diameter 10 mm	white	1 pouch	50 / pouch 1/50/1.000	18.000	
444012	for fibreglass rods of diameter 12 mm	white	1 pouch	50 / pouch 1/50/1.000	25.000	

Additional Insulator


for oval fibreglass post

- variable height of pole insulator
- absolutely secure attachment
- Material: Plasticclip-on
- Suitable for: Poly wire, Rope, tape up to 10 mm
- suitable for oval fibreglass post 444271, 444272, 444261

	5	•			
Ref. no.	Colour	MOQ	Pieces / unit	Ð	€
444263	black	1 pack	25 / pack	1/25/1.000	



Fibreglass Posts

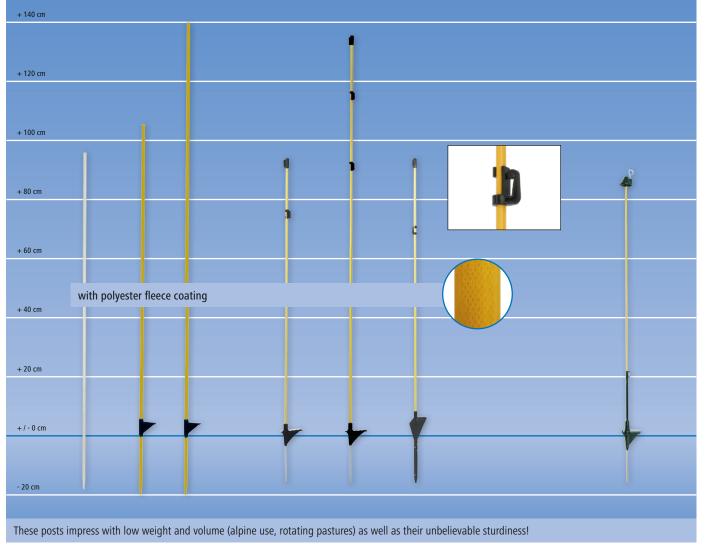

Round Fibreglass Post

- low weight
- extra robust design
- ideal for cattle, horse and sheep pens
- Insulators not included.

Ref. no.	Description	Colour	Total height	post ø	Length ground nail	Material ground nail	MOQ	Pieces / unit	Ø	Ħ	€
444280	no tread	white	115 cm	10 mm		fibreglass	1 pack	25 / pack	1/25	2.500	
444277	with single step	yellow	125 cm	12 mm	20 cm	fibreglass	1 pack	10 / pack	1/10	1.750	
444279	with single step	yellow	160 cm	12 mm	20 cm	fibreglass	1 pack	10 / pack	1/10	1.750	

Oval Fibreglass Post

- ideal for cattle, horse and sheep pens
- ideal for poly wires, wires and tapes up to 20 mm
- with single step

444291: incl. head insulator and height-adjustable additional insulator 444292: incl. head insulator and 2 x height-adjustable additional insulators 444269/10: incl. head insulator with metal ring; without polyester fleece coating 444293: incl. head insulator and height-adjustable additional insulator

	Ref. no.	Colour	Total height	post ø	Length ground nail	Material ground nail	MOQ	Pieces / unit	Ð		€
	444291	yellow / black	110 cm	10 x 8 mm	18 cm	metal	1 pack	10 / pack	1/10	1.200	
-	444292	yellow / black	152 cm	10 x 8 mm	18 cm	metal	1 pack	10 / pack	1/10	1.200	
	444269/10	yellow / black	106 cm	10 x 6 mm	18 cm	metal	1 pack	10 / pack	1/10	1.000	
	444293	yellow / black	110 cm	10 x 8 mm	22 cm	fibreglass	1 pack	10 / pack	1/10	1.750	

stability

5-year warranty of UV

5-year warranty of UV stability

Plastic Post Titan

- highly impact-resistant, high-grade plastic, virtually unbreakable
- with fibreglass reinforcement extremely robust and durable
- also suited for sub-zero temperatures
- for all conventional tapes, poly wires, ropes and wires

-
- vertically reinforced for increased stability stability
 with two galvanized spikes
- Single step with double prong
- Length ground Material ground Ref. no. Colour Total height Eyelets MOQ Pieces / unit Ħ € nail nail Galvanised 7 x Rope, 1 x tape (20 mm), 1/5/20 441807 white 157 cm 20 cm 1 pack 500 5 / pack Metal 4 x tape (40 mm)

Plastic Post Titan Plus

- highly impact-resistant, high-grade plastic, virtually unbreakable
- also suited for sub-zero temperatures
- · for all conventional tapes, poly wires, ropes and wires
- · vertically reinforced for increased stability

• with galvanised ground nail

with single step

metal step-in reinforcement provides extremely high stability

Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit		Ħ	€
4418083	blue	110 cm	16 cm	Galvanised Metal	5 x Rope, 1 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	490	
441808	white	110 cm	16 cm	Galvanised Metal	5 x Rope, 1 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	490	
441809	white	157 cm	19 cm	Galvanised Metal	7 x Rope, 1 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	500	

Plastic Post Titan

• highly impact-resistant, high-grade plastic, virtually unbreakable

• also suited for sub-zero temperatures

- for all conventional tapes, poly wires, ropes and wires
- · vertically reinforced for increased stability
- with galvanised ground nail

fiberglass reinforced

with double step

Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit			€
441800	white	110 cm	18 cm	Galvanised Metal	5 x Rope, 1 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	350	
441801	white	157 cm	21 cm	Galvanised Metal	7 x Rope, 1 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	500	

Plastic Post with Stirrup Step

- the post is very easily driven into the ground because the stirrup is positioned directly above the spike
- · for all conventional tapes, poly wires, ropes and wires
- with galvanised ground nail
- with fibreglass reinforcement extremely robust and durable
- with stirrup tread

44417 : incl. head insulator
444170 : incl. head insulator

Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit	Ø	Ħ	€
44417	green	114,5 cm	19 cm	Galvanised Metal	1 x Poly wire, 2 x Rope, 4 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	390	
44418	green	158 cm	19 cm	Galvanised Metal	4 x Rope, 4 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	360	
444170	white	114,5 cm	19 cm	Galvanised Metal	1 x Poly wire, 2 x Rope, 4 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	390	
444180	white	158 cm	19 cm	Galvanised Metal	4 x Rope, 4 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	360	



3 year warranty of UV


3 year warranty of UV

stability

stability

Plastic Posts



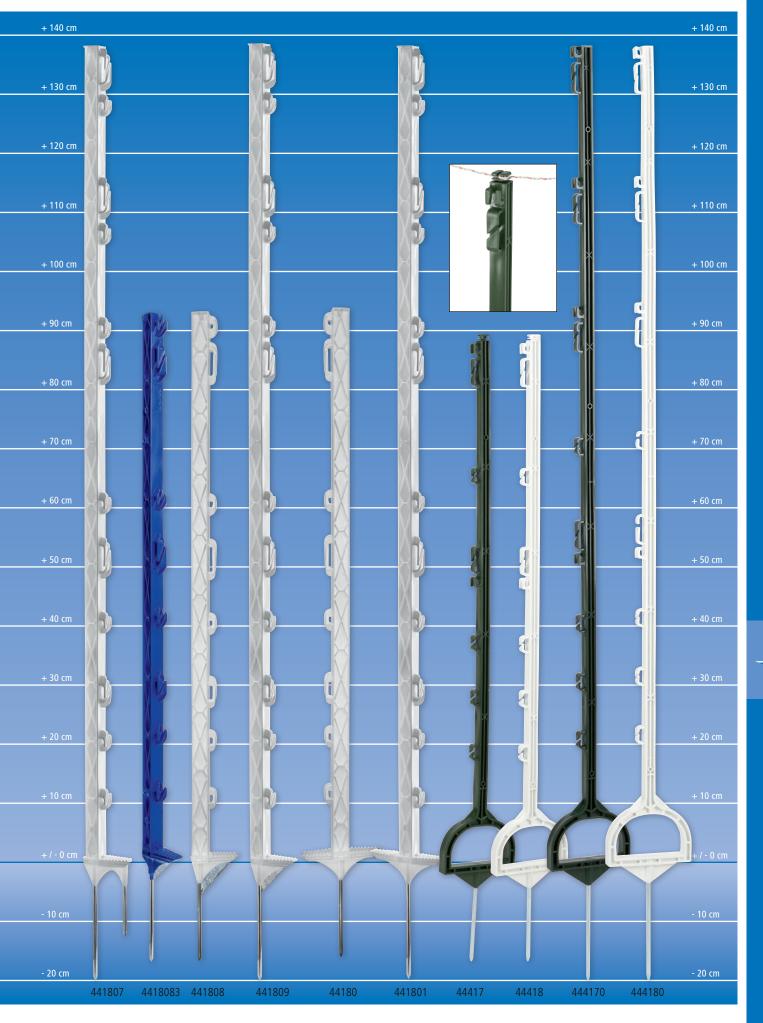



Plastic Post Classic

with single step

- for all conventional tapes, poly wires, ropes and wiresvertically reinforced for increased stability
- with galvanised ground nail
- with single step

stability

3 year warranty of UV

Plastic Posts



NEW: all Classic plastic posts now with even more robust step!


Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit		Ħ	€
443421	white	105 cm	18 cm	Galvanised Metal	2 x Rope, 3 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	630	
443412	white	156 cm	21 cm	Galvanised Metal	4 x Rope, 3 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/30	750	


Plastic Post Classic

with double step

- for all conventional tapes, poly wires, ropes and wires
- vertically reinforced for increased stability
- with galvanised ground nail
- with double step








NEW: all Classic plastic posts now with even more robust step!

Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit	Ø	Ħ	€	
443422	white	105 cm	18 cm	Galvanised Metal	2 x Rope, 3 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	485		•
443423	blue	105 cm	18 cm	Galvanised Metal	2 x Rope, 3 x tape (20 mm), 2 x tape (40 mm)	1 pack	5 / pack	1/5	485		NEW
443492	white	125 cm	21 cm	Galvanised Metal	3 x Rope, 3 x tape (20 mm), 3 x tape (40 mm)	1 pack	5 / pack	1/5/20	500		
443493	white	156 cm	21 cm	Galvanised Metal	4 x Rope, 3 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	500		
4434937	petrol	156 cm	21 cm	Galvanised Metal	4 x Rope, 3 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	500		
4434932	green	156 cm	21 cm	Galvanised Metal	4 x Rope, 3 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	500		
4434938	pink	156 cm	21 cm	Galvanised Metal	4 x Rope, 3 x tape (20 mm), 4 x tape (40 mm)	1 pack	5 / pack	1/5/20	500		

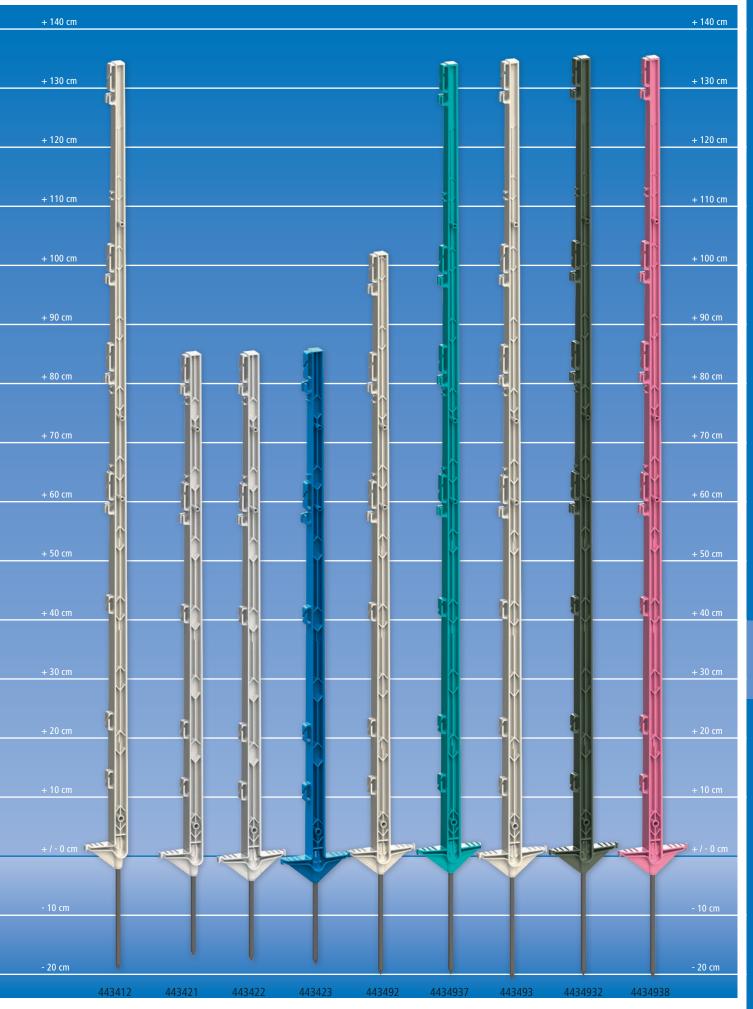



3 year warranty of UV

3 year warranty of UV

5-year warranty of UV

stability

stability

stability

Plastic Post Basic

- for all conventional tapes, poly wires, ropes and wires
- vertically reinforced for increased stability
- with galvanised ground nail

	anvanisea ground									
Ref. no.	Description	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ Pieces / unit			€
44497	with single step	white	105 cm	17 mm	Galvanised Metal	5 x Rope, 2 x tape (20 mm), 1 x tape (40 mm)	1 pack 5/pack	1/5	720	
44491	with double step	white	105 cm	17 cm	Galvanised Metal	5 x Rope, 2 x tape (20 mm), 1 x tape (40 mm)	1 pack 5 / pack	1/5	560	

Top Seller

Plastic Post Eco

- for all conventional tapes, poly wires, ropes and wires
- vertically reinforced for increased stability
- with galvanised ground nail
- with single step

Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit		Ħ	€
441810	white	70 cm	18 cm	Galvanised Metal	5 x tape (20 mm)	1 pack	5 / pack	1/5	1.200	
4418102	green	70 cm	18 cm	Galvanised Metal	5 x tape (20 mm)	1 pack	5 / pack	1/5	1.200	
441812	white	105 cm	18 cm	Galvanised Metal	7 x tape (20 mm), 1 x tape (40 mm)	1 pack	5 / pack	1/5	1.000	

Full Plastic Post

• stable, galvanised, double prong - therefore especially sturdy and easy to insert

• vertically reinforced for increased stability

• for all conventional tapes, poly wires, ropes and wires

• Single step with double prong


Ref. no.	Colour	Total height	Length ground nail	Material ground nail	Eyelets	MOQ	Pieces / unit	Ø	Ħ	€
444901	white	102 cm	12 cm	metal	5 x tape (10 mm), 2 x tape (20 mm), 1 x tape (40 mm)	1 pack	5 / pack	1/5	1.080	

Plastic Post

• solid material

• with galvanised ground nail

Ref. no.	Description	Colour	Total height	post ø	Length ground nail	Material gro nail	und	MOQ	Pieces / unit			€
44400	no tread	white	108 cm	19 mm	23 cm	Galvanise Metal	d	1 pack	10 / pack	1/10	1.000	
44405	with single step	white	108 cm	19 mm	26 cm	Galvanise Metal	d	1 pack	10 / pack	1/10	1.000	
44499	with single step	white	158 cm	19 mm	26 cm	Galvanise Metal	d	1 pack	10 / pack	1/10		
Ref. no.		Descrip	tion		Colour	Material	Ø	MC	Q Pieces	unit	Ø	€
44403	Spare Eyelet for w	ire, poly w	ire, rope and 10	mm tape	white	PVC	19 mr	n 1po	uch 25/p	ouch 1/	25/1.000	
44404	Spare	Eyelet tape	up to 40 mm		white	PVC	19 mm	n 1po	uch 25 / p	ouch 1	/25/750	

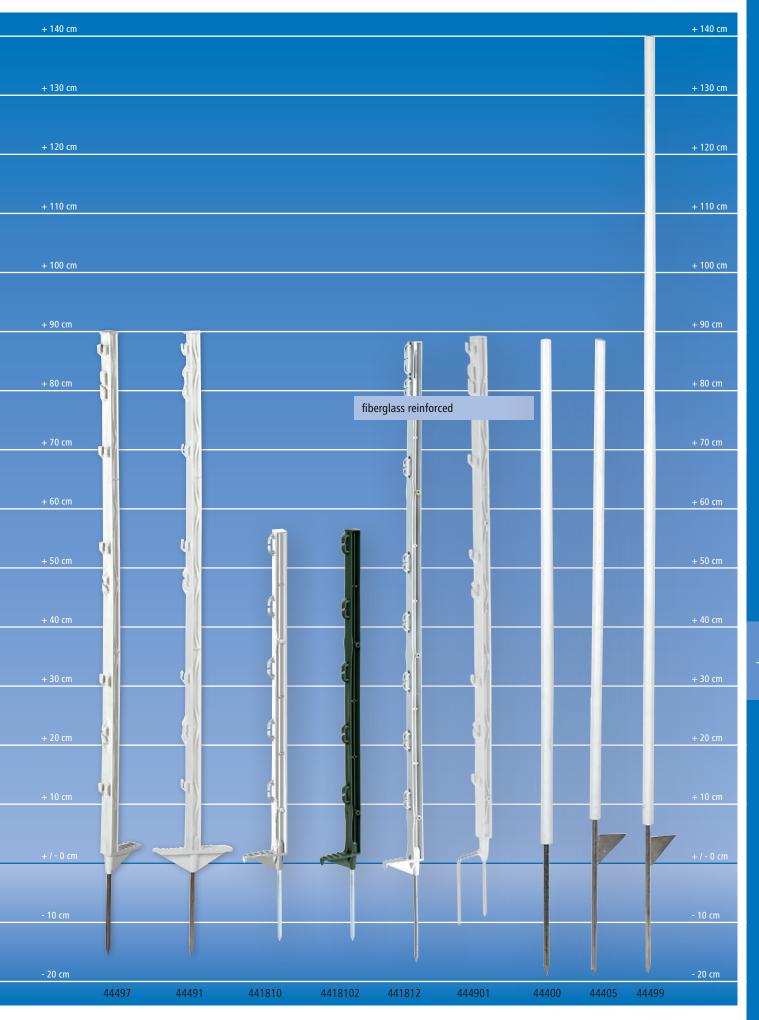



Angular Steel Post

The angled steel posts are suitable for all-year-round use. There is no danger of breaking, even at the lowest temperatures.

- excellent for dry and rocky areas
- with double step

444215: with holes at 20, 40, 60, 90, 120 cm - ideal for 5-row wolf defence fences

Ref. no.	Colour	Total height	Material thickness	Length ground nail	Holes	MOQ	Pieces / unit		Ħ	€
44421	red	115 cm	2 mm	18 cm	4	1 pack	10 / pack	1/10	500	
444213	red	115 cm	3 mm	18 cm	4	1 pack	10 / pack	1/10	500	
444215	red	150 cm	3 mm	20 cm	5	1 pack	10 / pack	1/10	500	
44453	red	165 cm	3 mm	20 cm	5	1 pack	10 / pack	1/10	500	

Splint Insulator for Angled Steel Post

- new improved version now even more robust
- Material: Polypropylene
- Suitable for: Poly wire, Rope, tape up to 10 mm
- incl. metal pin


	Ref. no.	MOQ	Pieces / unit			€
	446530	1 pouch	25 / pouch	1/25/500	18.000	
	446530/1257	1 bucket	125 / bucket	1	96	
- 7						

Spring Steel Post

- with large top insulator
- with tread plate

Posts for the cattle husbandry, proven for decades


Ref. no.	Description	Colour	Total height	post ø	Length ground nail	Material ground nail	MOQ	Pieces / unit	Ø		€
441457	oval	brown	107 cm	11 x 5 mm	20 cm	metal	3 pack 1	0 / pack	1/10/30	720	
441458	round	brown	107 cm	8 mm	20 cm	metal	3 pack 1	0 / pack	1/10/30) 720	
441455	oval	brown	106 cm	11 x 5 mm	20 cm	metal	3 pack 1	0 / pack	1/10/30) 720	
441456	oval	brown	106 cm	11 x 5 mm	20 cm	metal	3 pack 1	0 / pack	1/10/30) 720	
Ref. no.		Descrip	otion		Colour	Material	MO	Q Piec	es / unit		€
441315		Additional	Insulator		black	Plastic	1 pou	ich 25 /	pouch	1/25/400	
441317	Spare	Insulator for	· Oval Steel Pos	t	black	Plastic	1 pou	ich 25 /	pouch	1/25/500	
44432	Spare Insulator	r with Metal	Eyelet for Oval	Steel Post	black	Plastic	1 pou	ich 25 /	pouch	1/25/500	
44433	Spare Ri	ng Insulator	for Oval Steel P	ost	black	Plastic	1 pou	ıch 25 /	pouch	1/25/500	
441316	Additional	Insulator Clip	o for Round Stee	el Post	black	Plastic	1 pou	ich 25 /	pouch	1/25/400	
441318	Spare	nsulator for	Round Steel Po	st	black	Plastic	1 pou	ich 25 /	pouch	1/25/500	
441421	Cha	irge Insulatoi	r for oval post		red	Plastic	1 pou	ich 50 /	pouch '	1/50/1.800	

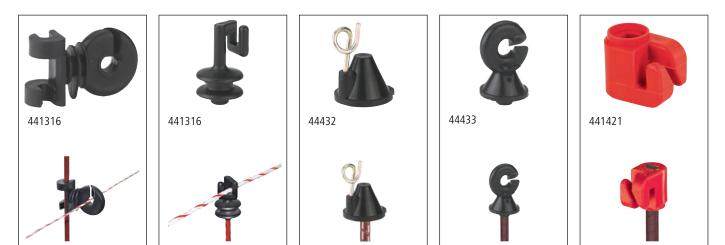




Metal posts





Metal posts

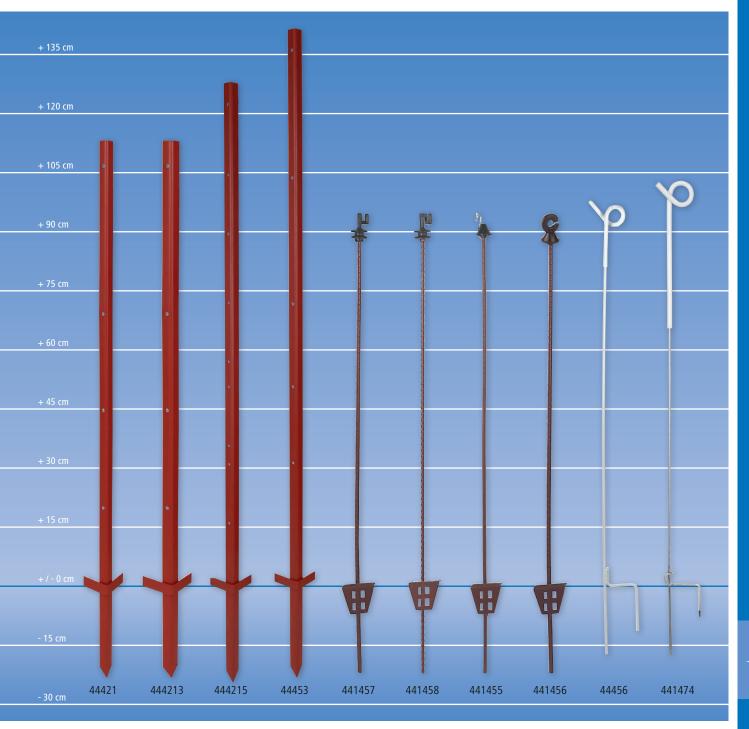

Evelet Metal Post

white posSingle ste		le prong							0/		
Ref. no.	Colour	Total height	post ø	Length ground nail	Material ground nail	MOQ	Pieces / unit	Ø		€	
44456	white	105 cm	7 mm	15 cm	metal	1 pack	10 / pack	1/10	1.000		

Spring steel post with eyelets

galvanised post with eye (PE insulation) Single step with double prong

Ref. no.	Colour	Total height	post ø	Length ground nail	Material ground nail	MOQ	Pieces / unit	Ø		€
441474	white	109 cm	6,5 mm	17 cm	metal	1 pack	10 / pack	1/10	1.000	





Insulators

Insulators separate the conductor material from the post and prevent unwanted discharge into the ground. There are insulators for each area of application, specially developed for each conductor material or the various types of post.

For most insulators, the following applies: the larger the insulator, the better its insulating properties. For corners and junctions, extra robust insulators should be used because there are high tensile forces here that put high stress on the material. Along with their insulating properties, our insulators also make it easier to work with the various conductor materials. For example, with the right insulator, you can re-tension sagging conductor material with just a few actions or take care of partially torn tapes for re-electrification.

We divide our insulators into the following types of applications:



Corners







Gates

Distance insulators



----()

139

Ring Insulators with continuous support




The robust insulators with the metal core

Ring Insulator

- with wide wire support
- Material: Plastic
- with wood thread
- with continuous galvanised support Ø 5,3 mm
 Suitable for: Poly wire, Rope, tape up to 10 mm

Free screwdriver! (Art. No. 443145/100E)



Ref. no.	Colour	MOQ	Pieces / unit	Ħ		€
443145	black	1 pouch	25 / pouch	1/25/500	18.000	
443145/100E	black	1 bucket	100 / bucket	1	112	





Ring Insulator BIG

- best insulation with 3 drip nozzles
- Material: impact-resistant plastic
- with wood thread
- with continuous galvanised support Ø 6 mm
- Suitable for: Poly wire, Rope, tape up to 10 mm




suitable screwdriver 441363/016

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
44326	black	1 pouch	25 / pouch	1/25/500	18.000	

Screwdriver for ring and clip insulator

- for drills and battery screwdrivers
- easily screwed in due to its round shape
- Material: Plastic

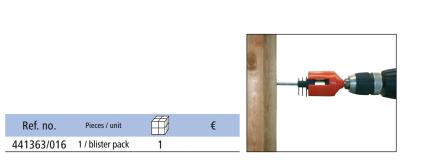



Ring Insulators with short support





Tape Insulators

Clip Insulator Maxi Tape

- improved clip mechanism thanks to 2 locking points
- Material: Plastic
- with wood thread

patented

Ref. no.

441390


with galvanised support Ø 6 mm

suitable screwdriver 441363/016

Colour

black

• Suitable for: rope up to \emptyset 6 mm, tape up to 40 mm



Wide Tape Ring Insulator

Support length

37 mm

MOQ

1 pouch

Pieces / unit

25 / pouch

Ħ

1/25/500

18.000

€

- Material: Plastic
- with wood thread
- with galvanised support Ø 6 mm
- Suitable for: tape up to 20 mm

Our most popular	wide	tape ring	insulator for
20 mm tapes!			


Ref. no.	Colour	MOQ	Pieces / unit			€
44309	black	1 pouch	25 / pouch	1/25/500	18.000	
44309/156	black	1 blister pack	15 / blister pack	1/14	224	



Insulator Euro Tape

- easy tape installation possible
- Material: Plastic
- with wood thread
- with galvanised support Ø 6 mm
- Suitable for: tape up to 40 mm







Clip Insualtor Profi

The slip-proof rubber pad holds tapes up to 40 mm eliminating tape wear and increases the service life of tapes

- · easy to use with existing fencing
- Material: Plastic UV-stabilised
- screw in or nail on
- Suitable for: tape up to 40 mm

Professional tip: a perfect stretch insulator.

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
44359	black	1 pouch	10 / pouch	1/10/200	3.200	

Wide Tape Insulator

- solid and durable type
- tape passes through thus easy straining of hot tape over longer runs of fence
- Material: Plastic
- screw in or nail on
- Suitable for: tape up to 40 mm

ideal in combination with Profi corner/stretch insulator

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
44340	black	1 pouch	10 / pouch	1/10/200	4.800	

Wide Tape Insulator

- solid and durable type
- tape passes through thus easy straining of hot tape over longer runs of fence
- Material: Plastic
- screw in or nail on
- Suitable for: tape up to 20 mm

ideal in combination with Profi corner/stretch insulator



Clip Insulator Easy Tape

- improved clip mechanism thanks to 2 locking points
- reinforced screw-on plate
- ideal fence line insulator
- Material: Plastic
- screw-on fastening
- Suitable for: rope up to Ø 6 mm, tape up to 40 mm

patented

Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
441391	black	1 pouch	25 / pouch	1/25/500	9.000	















143

Tape Insulators

Made in Germany

Tape Insulators

Tape/Rope Tensioner Premium

- easy tape/cable loosening
- · simple to add on to existing fence systems
- simple, secure tensioning by hand without tools thanks to ratchet function
- Material: Polyamide fibre-glass reinforced
- screw-on fastening
- Suitable for: rope up to Ø 8 mm, tape up to 40 mm

B	
T	I
W	



Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
44578	black	1 pouch	10 / pouch	1/10/100	2.400	

Corner/Stretch Insulator Profi

- electrically conductive rubber inlays through carbon fibres (patented) secure the tape very gently but reliably
- anti-slip by alternating rubber pad structure
- end or strain insulator, also excellent for corners
- mounts easily and strains tapes without fatigue
- Material: Plastic
- screw-on fastening
- Suitable for: Poly wire, Rope, tape up to 40 mm

Because of the logical further development of our proven Profi corner/stretch insulator, by turning the upper clamping element through 180 degrees it is now also possible to ensure even more secure fastening, especially for fence ropes and wires. Our Profi is therefore insulator the universal start/corner/stretch insulator, which makes it simple to tighten all conductor materials.

Individual interrupted / broken conductor wires are re-electrified by the electrici-ty-conducting rubber.

0

Professional tip: very popular for horse fences! patented											
Ref. no.	Colour	MOQ	Pieces / unit			€					
44350/066	black	1 blister pack	6 / blister pack	1/50	400						
44350	black	1 pouch	10 / pouch	1/10/200	3.200	·					

Tape Gate Insulator Profi

- a robust tape insulator with stainless steel connecting plate for gate handle and pasture fence connection
- Material: Plastic
- Suitable for: Rope, tape up to 40 mm

Set consisting of: 1 x insulators, 1 x stainless steel connector plate

Ref. no.	Colour	MOQ	Pieces / unit	Æ		€			1.3
44355/046	black	1 blister pack	4 / blister pack	1/22	528			-	
Ref. no.		D	escription			MOQ	Pieces / unit		€
443453	Conne	ctor plate fo	r tape gate ir	nsulator Profi		10 pieces	10 / pouch	1/10/400	

3	2		
	C	4	
		F	9
	-		
	VP		



Made in Germany



Corner Insulators

Corner insulator Super

• extra-strong design, highly robust • polyamide plastic for high tensile forces • electrical discharges effectively do not arise, partly through the highly insulated post and partly through the special form of the insulator, which prevents the conductor material slipping on the metal support • with wood thread • with continuous galvanised support Ø 8 mm • Suitable for: Bone Bolk with U and U

Suitable for: Rope, Poly wire, Wire, tape up to 10 mm

|--|--|

Ref. no.	Colour	MOQ	Pieces / unit	Ð		€	The perfect corner solution
441330	black	1 pouch	10 / pouch	1/10/250	7.500		

Tape Corner Insulator Cavallo

• extra strong finish, made from very durable polyamide plastic • free-running tape is fed through safely thanks to smooth, rounded surface • with wood thread • with continuous galvanised support Ø 8 mm • Suitable for: tape up to 40 mm

Ref. no.	Colour	MOQ	Pieces / unit	Ð		€
441376	black	1 pouch	10 / pouch	1/10/250	4.500	

Corner insulator for wire and rope

- reinforced design - Fully rotatable roll - Material: Plastic - with wood thread - with galvanised support Ø 7 mm - Suitable for: Poly wire, Rope



Important: Not suitable for tapes with copper wires!



							1
Ref. no.	Colour	MOQ	Pieces / unit	Ø		€	
44330	black	1 pouch	25 / pouch	1/25/250	9.000		

Corner insulator

• screw in or nail on

44347: for tapes 40 - 60 mm

44348: for forking fences off in different directions for 40 mm tapes

Ref. no.	Description	Colour	MOQ	Pieces / unit	Ē		€
44347	without additional bracket	black	1 pouch	10 / pouch	1/10/100	4.800	
44348	with spare bracket	black	1 pouch	10 / pouch	1/10/100	2.400	

polyamide de-tensioning insulator for steel wire

- suitable as corner and strain insulator inpermanent fencing (plain wire)
- Material: Polyamide fibre-glass reinforced
- Suitable for: steel wire, Poly wire, Rope

Rope	resists especially high strains

Ref. no.	Colour	MOQ	Pieces / unit			€
44358	white	1 pouch	10 / pouch	1/10/250	3.600	

Strain Insulator for electric rope

• important aid in fence construction • Material: Polypropylene fibre-glass reinforced • Suitable for: Wire, Poly wire, Rope

Ref. no.	Colour	MOQ	Pieces / unit	Ð		€
44334	white	1 pouch	25 / pouch	1/25/250	9.000	
44335	black	1 pouch	25 / pouch	1/25/250	6.000	



CORRAL 145

Slit Insulators

- excellent insulation qualities
- Material: Plastic
- with wood thread
- with continuous galvanised support Ø 5,3 mm
- Suitable for: Poly wire, Wire

Slot and Rope Insulators



Ref. no.	Colour	MOQ	Pieces / unit			€
44300	black	1 pouch	25 / pouch	1/25/500	18.000	
44305	red	1 pouch	100 / pouch	1/100/1.000	18.000	

Slit Insulators

- excellent insulation qualities
- Material: Polycarbonate
- with wood thread
- with continuous galvanised support Ø 6 mm
- Suitable for: Poly wire, Wire



polycarbonate = highly break-proof and durable!										
Ref. no.	Colour	MOQ	Pieces / unit	Ē		€				
44302	orange	1 pouch	25 / pouch	1/25/500	18.000					

Combi Insulator Premium

- combines various uses of conductor materials in ONE insulator
- · excellent insulation characteristics due to large, wide drip-zones emphasise the
- high quality of this insulator
- Material: Plastic
- with wood thread
- with short galvanised support Ø 6 mm
- Suitable for: Poly wire, Rope, Wire, tape up to 20 mm

proven a hundred thousand times over!										
Ref. no.	Colour	MOQ	Pieces / unit	Ø		€				
441380	black	1 pouch	25 / pouch	1/25/500	18.000		_			



Rope Insulator Euro

- Material: Plastic
- with wood thread
- with galvanised support Ø 6 mm

Colour

black

- Suitable for: Poly wire, rope up to \emptyset 8 mm, tape up to 10 mm

MOQ

1 pouch

Pieces / unit

25 / pouch

Ĥ

1/25/500



Ref. no.

Rope Insulator Euro Cord

extremely robust insulator made from break-proof plastic

- screw in or nail on
- Suitable for: Poly wire, rope up to Ø 8 mm, tape up to 10 mm, TopLine Horse Wire, Premium Horse Wire



ideal for Premium Horse Wire and

€

TopLine Horse Wire



Pieces / unit

10 / pouch

MOQ

1 pouch

Æ

1/10/200

7.200

• professional insulator for permanent fencing

Colour

black

- ideal for steel wires
- Material: Plastic

Ref. no.

441396


- screw in or nail on
- Suitable for: Wire, Poly wire up to Ø 2.5 mm



Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
441398	black	1 pouch	10 / pouch	1/10/200	7.200	

Insulator Pinlock

- heavy-duty insulator
- Material: Plastic
- screw in or nail on
- Suitable for: steel wire 1.0 2.0 mm, Poly wire, rope up to Ø 8 mm

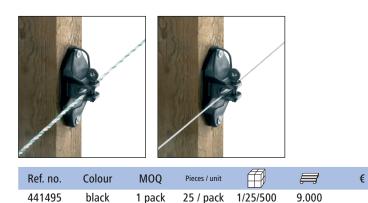





Additional Insulators

Screw Insulator Vario Plus

- for metal or plastic posts up to ø 17 mm
- mounted on side of post and easily tightened
- heavy-duty quality
- Material: impact-resistant plastic



patented

Overturn protection: The mother can no longer be jumped over!

Ref. no.	Description	Colour	MOQ	Pieces / unit	Ø		€
441386	for tapes up to 40 mm	black	1 pouch	10 / pouch	1/10/200	4.800	
441387/206	for wire, poly wire, rope and 10 mm tape	black	1 blister pack	20 / blister pack	1	192	
441387	for wire, poly wire, rope and 10 mm tape		1 pouch	10 / pouch	1/10/200	6.000	

Ring Insulator Vario Classic

- for metal or plastic posts from 7 to 19 mm diameter
- fast and tool-free installation
- · easy to tighten / fix in place by winding the conductor material around the insulator
- Material: impact-resistant plastic
- Suitable for: Poly wire, Rope, tape up to 10 mm



Clip Insualtor Allround

• for metal or plastic posts up to 19 mm diameter

MOQ

1 pouch

Pieces / unit

10 / pouch

Colour

black

- easy to integrate in already installed fence
- Material: Plastic
- Suitable for: Poly wire, tape up to 20 mm





Ref. no.

Additional Insulators

Screw Insulator for round posts

- for metal or plastic posts up to 12 mm diameter
- Material: Plastic
- Suitable for: Wire, Poly wire, Rope, tape up to 10 mm





Ref. no.	Colour	MOQ	Pieces / unit	Ø		€
44387	black	1 pouch	10 / pouch	1/10/200	6.000	

Nail Insulator

- with knob
- Material: Plastic
- nail-in
- Suitable for: Wire, Poly wire
- delivery without nail





Ref. no.	Colour	MOQ	Pieces / unit			€
44360	black	1 pack	100 / pack	1/100/1.800	28.800	

Nail Insulator

- Material: Plastic
- nail-in
- Suitable for: Wire, Poly wire
- delivery without nail





-=-()

	Ref. no.	Colour	MOQ	Pieces / unit			€
_	44361	black	1 pack	100 / pack	1/100/1.800	28.800	

Nail Insulator

- Material: Plastic
- nail-in
- Suitable for: Wire, Poly wire
- Supplied with nails



Ref. no.	Description	Colour	MOQ	Pieces / unit	Ð		€
44367	with 7 cm nails	black	1 pouch	50 / pouch	1/50/700	33.600	
44368	with 10 cm nails	black	1 pack	50 / pack	1/50/400	10.800	





Offset Insulators

Offset Ring Insulator

- suitable as a spacer
- Material: Plastic
- with wood thread
- with galvanised support Ø 6 mm
- Suitable for: Poly wire Rope tape up to 10 mm

Suitable it		ε, πορε, ταρε αρ το					
suitable scr	rewdriver 4	41363/016					
Ref. no.	Colour	Support length	MOQ	Pieces / unit			€
441480	black	22 cm	1 pouch	10 / pouch	1/10/300	5.400	

accountered and a second



Offset Ring Insulator

- suitable as a spacer
- Material: Plastic
- with wood thread
- with galvanised support Ø 6 mm
- Suitable for: Poly wire, rope up to Ø 8 mm, tape up to 10 mm

Support length

22 cm

MOQ

1 pouch

Pieces / unit

10 / pouch

Ħ



Offset Rope Insulator

Colour

black

- suitable as a spacer
- Material: Plastic •

Ref. no.

- with wood thread •
- with short galvanised support Ø 6 mm
- Suitable for: Poly wire, rope up to Ø 8 mm, tape up to 10 mm





Ref. no.	Colour	Support length	MOQ	Pieces / unit	Ø	Ħ	€
44385	black	22 cm	1 pouch	10 / pouch	1/10/200	7.200	



Offset Insulators

Long-Handle Clip Insulator

- suitable as a spacer
- Material: Plastic
- with wood thread
- with galvanised support Ø 6 mm
- Suitable for: Poly wire, rope up to Ø 6 mm, tape up to 40 mm



suitable screwdriver 441363/016	

Ref. no.	Colour	Support length	MOQ	Pieces / unit			€
441395	black	20 cm	1 pouch	10 / pouch	1/10/300	7.200	


Stem Eyelet Insulator

- Material: metal plastic-coated
- nail on with staples 44394 (not included)
- Suitable for: Poly wire, Rope, tape up to 40 mm

Ģ	}								-6
Ref. no.	Colour	Support length	MOQ	Pieces / unit	Ø		€		
44448	white	40 cm	1 pouch	10 / pouch	1/10/50	1.400			

Offset Pigtail Insulator

- suitable as a spacer
- with wood thread
- Suitable for: Poly wire, Rope, tape up to 40 mm

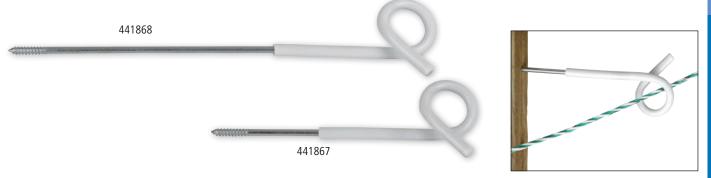

441867 white 25 cm 1 pouch 5 / pouch 1/5/100 3.200 441868 white 40 cm 1 pouch 5 / pouch 1/5/100 2 400	Ref. no.	Colour	Support length	MOQ	Pieces / unit	Ø		€
441868 white 40 cm 1 pouch 5 / pouch 1/5/100 2 400	441867	white	25 cm	1 pouch	5 / pouch	1/5/100	3.200	
-++1000 White +0 cm + 1 pouch 57 pouch 1/5/100 2:400	441868	white	40 cm	1 pouch	5 / pouch	1/5/100	2.400	



Insulators with metric thread

Ring Insulator

- Material: Plastic
- with metric thread
- with short galvanised support \emptyset 6 mm
- Suitable for: Poly wire, Rope, tape up to 10 mm
- 2 nuts included



Ref. no.	Description	Colour	Thread	Thread length	MOQ	Pieces / unit	Ø		€
44324	for metal post	black	M6	35 mm	1 pouch	25 / pouch	1/25/500	18.000	
44324/206	for metal post	black	M6	35 mm	1 blister pack	20 / blister pack	1/14	448	
44391	for tubular pole	black	M6	80 mm	1 pouch	25 / pouch	1/25/500	18.000	

Corner insulator

- reinforced design Roll complete with solid support
- fully rotatable
- Material: Plastic
- with metric thread
- with galvanised support Ø 6 mm
- Suitable for: Poly wire, Rope
- 2 nuts included




R	ef. no.	Colour	Thread	MOQ	Pieces / unit	Ħ		€
4	41394	black	M6	1 pouch	25 / pouch	1/25/250	10.500	

Insulators with metric thread

Clip Insulator

- Material: Plastic
- with metric thread
- with short galvanised support Ø 6 mm
- Suitable for: rope up to Ø 6 mm, tape up to 40 mm
- 2 nuts included

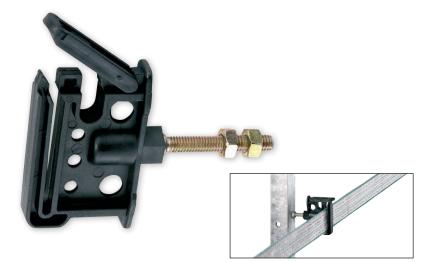


Ref. no.	Colour	Thread	Thread length	MOQ	Pieces / unit	Ð		€
441392	black	M6	35 mm	1 pouch	25 / pouch	1/25/500	10.800	

Long-Handle Clip Insulator

- suitable as a spacer
- Material: Plastic •
- · with metric thread
- with short galvanised support Ø 6 mm
- Suitable for: Poly wire, Rope, tape up to 40 mm
- 2 nuts included

Ref. no.

441393

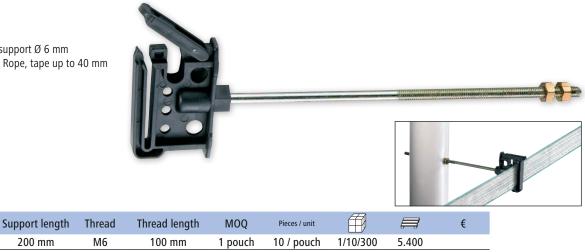

Fastening Clamp for round posts

- for 35 70 mm round posts
- incl. rubber inlay to protect the posts

Colour

black

• to fasten insulators with metric thread M6










Gate insulators

Gate Insulator stainless steel

- for attaching gate handles on both sides
- practical and secure ٠
- · Support and hook made from stainless steel

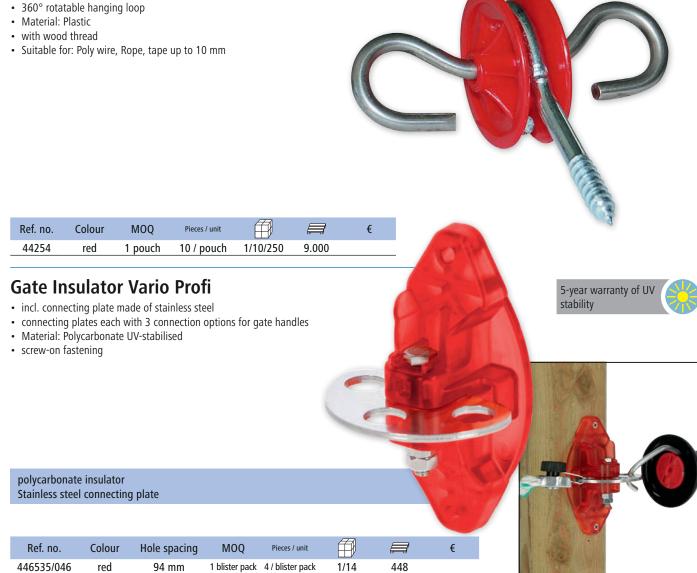

Quick rope/poly wire connector Premium

allows ropes, wires and tapes of up to 10 mm to be connected to gate insulators and handles quickly and easily, resulting in a connection with optimal electrical conductivity

The benefits: No need for tools, easy to create an optimum electrical connection using fixing

made from stainless steel, guaranteeing excellent corrosion resistance

screw. Also ideally suitable for tensioning.

• no tools required

stainless steel

patented





New product

NEW

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€
441285/046	stainless steel	Poly wire, rope up to Ø 8 mm, tape up to 10 mm	1 blister pack 4	4 / blister pack	1	

Gate insulators

Gate Insulator

- for attaching gate handles on both sides
- practical and secure
- 360° rotatable hanging loop
- with wood thread
- with galvanised support

Important: Not suitable for conductor material with copper wires!

Ref. no.	Colour	MOQ	Pieces / unit	Ø	\blacksquare	€
44248	black	1 pouch	10 / pouch	1/10/250	9.000	
44248/066	black	1 blister pack	6 / blister pack	1/50	600	

Gate Insulator Vario

- incl. connecting plate made of stainless steel
- fiberglass reinforced
- connecting plates each with 3 connection options for gate handles
- Material: Polyamide
- screw-on fastening

Stain	less s	teel	connect	ting	plate	
-------	--------	------	---------	------	-------	--

Ref. no.	Colour	Hole spacing	MOQ	Pieces / unit			€
44237/026	black	70 mm	1 blister pack	2 / blister pack	1/50	1.600	

The benefits: No need for tools, easy to create an optimum electrical connection using fixing


Quick rope/poly wire connector

screw. Also ideally suitable for tensioning.

- allows ropes, wires and tapes of up to 10 mm to be connected to gate insulators and handles quickly and easily, resulting in a connection with optimal electrical conductivity
- no tools required

patented





CORRAL

Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ð
441209/046	metal galvanised	Poly wire, rope up to Ø 8 mm	1 blister pack	4 / blister pack	1

-	

-**-**()

Gate Handle Premium Plus

- robust, durable gate handle through screwed metal sealing caps
- · Hook and eyelet made from non-rusting stainless steel ensures excellent corrosion resistance
- Material: Plastic UV-stabilised



Gate Handle Premium

- Hook and eyelet made from non-rusting stainless steel ensures excellent corrosion resistance
- Material: Plastic UV-stabilised
- with tension limiter



Ref. no.	Colour	MOQ	Pieces / unit		€
44940	black	5 pieces	5 / pack	1/5/100	

Gate Handle

- Galvanised hook and eyelet •
- Material: Plastic UV-stabilised •
- with tension limiter •



Gate Handle

Gate Handle

with tension limiter

· galvanised hook and eyelet • Material: Plastic UV-stabilised

- with eyelet hooks
- Material: Plastic UV-stabilised
- with simple tension spring



Ref. no.	Colour	MOQ	Pieces / unit	Ø	€
44952	black	5 pieces	5 / pack		

Gate Handle Soft Grip • very resistant and flexible plastic • break-proof, even during frost · Galvanised hook and eyelet • Material: Plastic UV-stabilised • with tension limiter Ħ Ref. no. Colour MOQ Pieces / unit € 5 pieces 1/5/100 44973 black 5 / pouch

Gate Handle

- Galvanised hook and eyelet •
- Material: Plastic UV-stabilised •
- with tension limiter .



Gate Handle

- galvanised hook and spring •
- Material: Plastic UV-stabilised •
- with simple tension spring




Ref. no.	Colour	MOQ	Pieces / unit		€
44251	black	5 pieces	5 / pouch	1/5/100	

Gate Handle galvanised hook and spring • Material: Plastic UV-stabilised • • with simple tension spring Pieces / unit Ref. no. MOQ Colour Ħ € 1/5/100 44951 black 5 / pack 5 pieces 44957 1/5/100 pink 5 pieces 5 / pack 44958 5 / pack 1/5/100 neon purple 5 pieces 44959 neon green 5 pieces 5 / pack 1/5/100 44960 neon orange 5 pieces 5 / pack 1/5/100 44953 yellow 5 pieces 5 / pack 1/5/100 44961 petrol 5 pieces 5 / pack 1/5/100

Fence Clip

- for attaching gate handles when gate is open
- avoids dangerous trip hazards and contamination of conductor material • and gate handle
- no power leakage any more from conductor material lying on the ground suitable for fencing tape to max. 40 mm width, ropes to 8 mm diameter, •
- and wires
- set consists of 8 clips .
- · Material: Plastic

Ref. no.	MOQ	Pieces / unit	Ð	€
442371	1 blister pack	8 / blister pack	1/100	

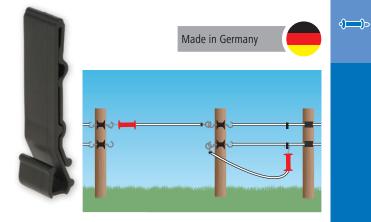

CORRAL 157

Tape Gate Handle Connector Litzclip®

- The new tool-free gate handle connectors for 10, 20 and 40 mm fence tapes extend our patented, successful Litzclip[®] range.
- The connectors are self-evident in their function and can be very easily and quickly fitted to any gate handle or gate insulator.



Ref. no.	Material	can be used for	MOQ	Pieces / unit	Ø	€
442006/046	stainless steel	tape up to 20 mm	1 blister pack	4 / blister pack	1/100	
442007/046	stainless steel	tape up to 40 mm	1 blister pack	4 / blister pack	1/100	

Gate Handle Premium with Litzclip® Tape Connector

- Hook and eyelet made from non-rusting stainless steel ensures excellent corrosion resistance
- with Litzclip[®] stainless steel tape connector
- Material: Plastic UV-stabilised
- · with tension limiter





Ref. no.	Colour	Connector	MOQ	Pieces / unit	Ø	€
4494420	red	with Litzclip [®] stainless steel tape connector 20 mm	5 pieces	5 / pack	1/5/100	
4494440	red	with Litzclip [®] stainless steel tape connector 40 mm	5 pieces	5 / pack	1/5/100	
		· · ·				

Gate Handle with Litzclip® Tape Connector

- with Litzclip[®] stainless steel tape connector
- Galvanised hook and eyelet ٠
- Material: Plastic UV-stabilised •
- with tension limiter .





Ref. no.	Colour	Connector	MOQ	Pieces / unit	Ø	€
4494120	black	with Litzclip [®] stainless steel tape connector 20 mm	5 pieces	5 / pack	1/5/100	
4494140	black	with Litzclip® stainless steel tape connector 40 mm	5 pieces	5 / pack	1/5/100	

Gate Handle with Litzclip® connector

- with Litzclip[®] stainless steel rope connector
- Galvanised hook and eyelet
- Material: Plastic UV-stabilised
- · with tension limiter



				-			
Ref. no.	Colour	Connector	MOQ	Pieces / unit	Ø	€	
44969	black	with Litzclip [®] stainless steel rope connector 6 mm	5 pieces	5 / pack	1/5/100		
44972	black	with Litzclip [®] stainless steel poly wire connector 3 mm	5 pieces	5 / pack	1/5/100		

Gate Handle with Tape Connector

- with tape connector
- Galvanised hook and eyelet
- Material: Plastic UV-stabilised
- · with tension limiter



Important: Not suitable for tapes with copper wires!

Ref. no.	Colour	Connector	MOQ	Pieces / unit	Ø	€
44947	black	with tape connector 40 mm	5 pieces	5 / pack	1/5/100	

Gate Handle with rope and poly wire connector

- newly designed gate handle incl. rope and poly wire connector (already fixed to the gate handle)
- also suitable for tapes from 10 to 20 mm
- · Galvanised hook and eyelet
- · Material: Plastic UV-stabilised
- with tension limiter




Gate Lock

The lockable gate system

Hook the gate handle into the connector plate - push the safety cover to - lock the padlock - done! This firmly anchors the gate handle in the locked safety housing and only authorised persons can enter the pasture.

• two-part security casing: wall or post fixture + safety cover

Set consisting of: 1 x gate insulator with strong plastic and stainless steel mounting plate, 1 x gate handle with spring tension limiter, 2 x mounting screws, 1 x brass padlock with 2 keys

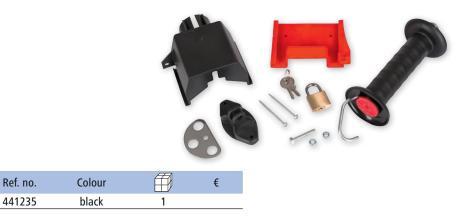





✐

(


•	incl. robust	ndle with gate handle with nook and spring	h hook	ıg	
	Ref. no.	Elasticity	Ø	€	
_	449535	5 m	1/20		

Gate Spring Kit

• stretchable up to 5 metres

Set consisting of: 1 x gate handle with hook, 1 x galvanised special spring, 2 x insulators



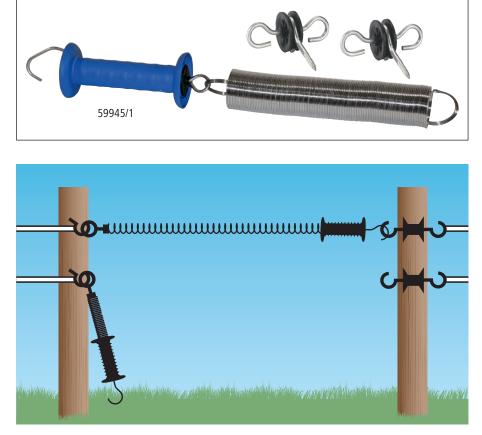



Not suitable for horse fencing.

Ref. no.	Description	Colour	Elasticity	Pieces / unit	Ø	€
44945	incl. ring and gate insulator	black	5 m		1/15	
59945/1	includes 2 gate insulators 44248	blue	5 m	1 / blister pack	1/12	
44963	includes 2 gate insulators 44248	black	5 m		1/15	

R	Ref. no.	Description	Material		€
4	44246	Spare Spring for Gate Spring Kit	metal galvanised	1/20	






Electric Cattle Gate Electro Gate

- · powered by fencers and easy to integrate in already installed fence systems
- the flexible fibre-glass sticks are covered with electrically conductive rubber
- insulated gate handles for pedestrians
- the physical law of the Faraday cage protects the driver against electric shocks
- opens in both directions and self-closing behind
- lockable in open position

44283: 1 rod, 1 hinge, 1 x insulated ground cable Set consisting of: 2 x stick, 2 x hinges, 1 x insulated ground cable

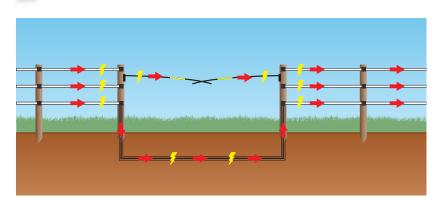

Ref. no.	Colour	max. passage width	Ø	€	
441287	black	6 m	1		• •
44282	black	5 m	1		
44281	black	3,6 m	1		
44283	black	1,2 m	1		

Ref. no.	Description	Colour	Material	Length		€
441288	Spare Rod Electro Gate	black	fibreglass	3 m	1	
44285	Spare Rod Electro Gate	black	fibreglass	2,5 m	1/50	
44284	Spare Rod Electro Gate	black	fibreglass	1,8 m	1/50	
44286	Spare Hinge Electro Gate				1	

♦


FlexiGate 19 m

The flexible barrier system

This system provides you with easy subdivision, closing of individual paddocks, and the guided herding of your animals (e.g. from the stable to the pasture).

- conductor material: optimal current output via 9 strong stainless steel conductors ensures the highest tending safety at the gate
- high quality workmanship
- · increased fracture load thanks to strong monofilament wires
- fastening 1: with 2 included wooden screws directly to the wooden post or wall
- fastening 2: with the included hinge



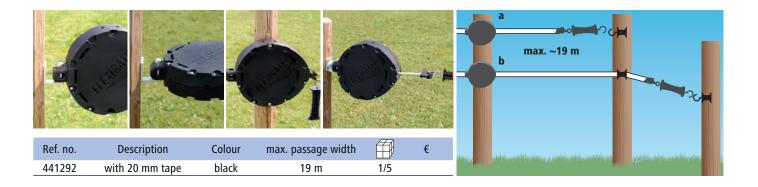

FlexiGate


The Flexible Gate System

Flexigate makes it easy for you to electrify paddock entrances. On opening the conductor material will be reeled up automatically by a steel spring.

- secured with 2 included wooden screws DIRECTLY to the wooden post
- no sagging of tapes or ropes
- no stumbling for humans and animals
- no catching of mane or tail hair
- no soiling of conductor material
- · end-to-end electrical contact
- Connecting cable not included







Especially suitable for horse paddocks! End-to-end electrical contact.

	Ref. no.	Description	Colour	max. passage width	Pieces / unit	Ø	€
	441234/016	with 40 mm tape	black / green	7,5 m	1 / blister pack	1/10	
_	441293/016	with 6 mm rope	black / green	7,5 m	1 / blister pack	1/10	

Ref. no.	Description	Colour	MOQ	Pieces / unit	Ø	€
44627	Rope Connecting Cable	red	1 blister pack	1 / blister pack	1/90	
44617	Tape Connecting Cable	red	1 blister pack	1 / blister pack	1/90	







3 Jahre Garantie

3


Gate System E-Line

The original E-Line System 'Made in the EU' for maximum quality requirements

- with conducting elastic rope
- very practical and handy electric fence door for fence openings
- no catching of mane or tail hair
- with stainless steel hook
- correct assembly of the gate system through the use of 3 gate posts
- · can be extended to around twice the length

Set consisting of: $1 \times \emptyset$ 7 mm electric fencing rope (3 years warranty), with 4×0.25 mm stainless steel conductors, with connector hook, 1×1 sturdy gate handle, 1×1 ring insulator, 1×1





Especially suitable for horse paddocks!

Ref. no.	Description	Elasticity	MOQ Pieces / unit	Ø	€
44255	Classic Packaging	3 - 6 m	1 blister pack 1 / blister pack	1/16	
442551	Classic Packaging	4,5 - 9 m	1 blister pack 1 / blister pack	1/16	

Gate System Eco

Inexpensive FlexiRope Gate Handle Set

- with conducting elastic rope
- can be extended to around twice the length
- no catching of mane or tail hair

Set consisting of: 1 x gate handle, 1 x current-carrying, 7 mm elastic rope with 3 x 0.30 mm stainless steel conductors, 2 x rope connectors, 1 x ring insulator, 2 x gate insulators



Ref. no.	Colour	Elasticity	Ð	€
441866	white / black	4,5 - 9 m	1/15	
441865	white / black	3 - 6 m	1/15	

Ref. no.	Description	Colour	Length	MOQ	Pieces / unit	Ø	€
441890	Rubber Electric Rope	white / black	25 m	1 pieces	25 / pieces	1/12	
441891	Rubber Electric Rope	white / black	50 m	1 pieces	50 / pieces	1/6	





Pasture gate adjustable

• stable galvanised steel pasture gate

Included in delivery: 1 x pasture gate, 2 x hinges, 1 x locking facility, 6 x wood screws (12 x 80 mm)



The hinge installation set can be compensated by adjusting the threaded hinge bolts.



Can be extended with an adjustable set screw



Closing option availa-ble (without lock) optional padlock for locking







The hinge installation set can be compensated by adjusting the threaded hinge bolts (freely height-adjustable).



Closing option available (without lock)





442578

Ref. no.	Description	Adjustability	Material	Height	Ø		€
44893	Pasture gate adjustable	1 - 1,7 m	Steel galvanised	110 cm	1	-	-
44892	Pasture gate adjustable	2 - 3 m	Steel galvanised	110 cm	1	-	₽
44891	Pasture gate adjustable	3 - 4 m	Steel galvanised	110 cm	1	-	P
44895	Pasture gate adjustable	4 - 5 m	Steel galvanised	110 cm	1	-	-
442557	Pasture gate adjustable	5 - 6 m	Steel galvanised	110 cm	1	12	P

Ref. no.	Description	Material	Length	Ø	Ø	€	
442577	Gate Post for Pasture Gate with plastic cap	metal galvanised	2 m	88 mm	1		• •
442578	Lock Catch for Gate Post	metal galvanised			1		
442579	Hinge pin bracket (in pairs) for gate post	metal galvanised			1		

Please note separate freight costs.

Pasture gate adjustable

• stable galvanised steel pasture gate



Ref. no.	Description	Adjustability	Material	Height	Ø	Ħ	€	
442900	Pasture gate adjustable	2 - 3 m	Steel galvanised	90 cm	1	50		P
442901	Pasture gate adjustable	3 - 4 m	Steel galvanised	90 cm	1	23		P
442902	Pasture gate adjustable	4 - 5 m	Steel galvanised	90 cm	1	23		• ••
					_			

€

Ref. no.	Description	
442940	Locking bolt for pasture gates	1

Please note separate freight costs.




Ref. no.	Description	Material	Length	Height		Ħ	€	
442920	Pasture gate not adjustable	Steel galvanised	3 m	1 m	1	23		P
442921	Pasture gate not adjustable	Steel galvanised	3,5 m	1 m	1	23		P
442922	Pasture gate not adjustable	Steel galvanised	4 m	1 m	1	23		P
442924	Pasture gate not adjustable	Steel galvanised	5 m	1 m	1	23		• ••
442925	Pasture gate not adjustable	Steel galvanised	6 m	1 m	1	23		P
Ref. no.	Description	on		Ø	€			
442940	Locking bolt for pa	asture gates		1				

Please note separate freight costs.

Mounting Set for pasture gates

- for easy mounting of your pasture gate to the post
- Material: Hot galvanised metal

Set consisting of: 2 x hinges, 1 x closure option (442558), 6 x wood screws

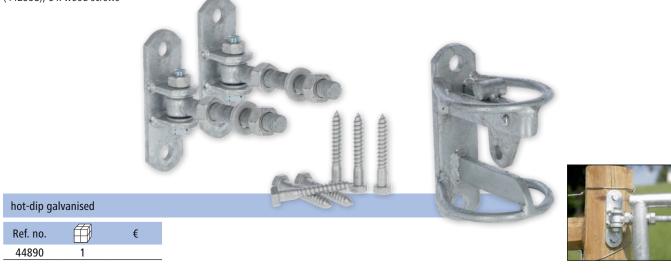

Closing option for pasture gate mounting set

for pasture gate mounting set

- enables you to lock your pasture gate via the brass padlock
- Padlock not included
- Material: metal hot-dip galvanised






hot-dip galvanised

Ref. no.	Ø	€
442558	1	

Swing-Through Lock for pasture gates

- the swing-through lock allows the gate to be opened in both directions
- the lock is fitted to the post and gate using the screws supplied
- can be used on all fence gates
- Material: metal






Supporting Wheel for pasture gates

- Solid Rubber Wheel Ø 200 mm
- all steel parts are hot dip galvanised
- can be height-adjusted



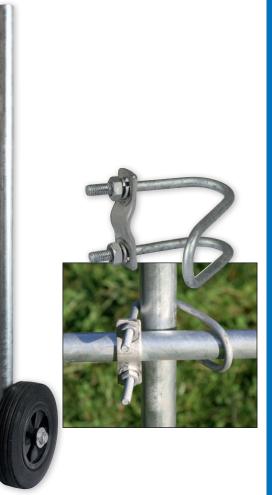



Electro Set for pasture gates

- kit for additional electrification of your fencing system around fence gates
- fence gate can continue to be opened by hand



Set consisting of: 6 x fixing rings, 6 x ring insulators with metric thread, 1 x rope / tape connector, 14 m rope, Ø 6 mm (Top Line Plus)

Ref. no.	Pieces / unit	Ð	€
441224	1 / blister pack	1/16	

Modular Hoarding

- practical connecting system for easy and tool-free installation of hoardings
- suitable for the creation of pre-gathering spaces, pens, individual and group boxes or stall dividers
- 7 cross tubes with increasing distance from bottom to top, tube diameter 25 mm or 21,3 mm

442603: Door with lock latch and reinforced frame, width of 57 cm 442604: Door with lock latch and reinforced frame, width of 57 cm 442611 : with two centrally located lamb slips with adjustable slip width (17.5 cm / 24.5 cm)



442601	442603	442611

Ref. no.	Description	Material	Width	Height		Ħ	€	
442600	Modular Hoarding	metal hot-dip galvanised	137 cm	92 cm	1	80		• ••
442601	Modular Hoarding	metal hot-dip galvanised	183 cm	92 cm	1	60		• ••
442602	Modular Hoarding	metal hot-dip galvanised	275 cm	92 cm	1	80		
442603	Modular Hoarding with door	metal hot-dip galvanised	183 cm	92 cm	1	68		- P
442604	Modular Hoarding with door	metal hot-dip galvanised	275 cm	92 cm	1	60		• ••
442611	Modular Hoarding with 2 lamb slips	metal hot-dip galvanised	183 cm	92 cm	1	60		. P

Ref. no.	Description	Material	Length	Width	Height	Ø	Ø	€
442606	Spare Strut for connecting hoardings with shafts	metal galvanised			92 cm		1	
442607	Bucket Holder for hanging	metal galvanised				30 cm	1	
32702	Hay Rack double	metal galvanised	61,5 cm	50 cm	48 cm		1	
32704	Hay Rack double	metal galvanised	62,5 cm	51 cm	48 cm		1	
442612	Connector Strut for modular hoarding	metal galvanised			95 cm		1/20	

Please note separate freight costs.

Paddock Panels

New product

NEW

Shelter for Portable Pens

Complete Set with Tarpaulin and Rods

- roofing for mobile shelter for sheep and goats (protection against rain, wind and sun)
- suitable for portable pens 2.75 m x 2.75 m
- tool-free and easy assembly using plug connections and wing nuts
- extremely durable and UV-stable tarpaulin, stitched at the corners
- the tarpaulin is fastened to the roof structure using leather straps or using the supplied cable ties with the portable pens



Included in delivery: roof Structure incl. Screws, roof Cover with Eyelets and Leather Straps, Cable Tie

Ref. no.	Ø	€
442615	1	



Ref. no.	Description	Material	Length	Ø	MOQ	Pieces / unit		€
442616	Ground Anchor for Portable Pen Shelter	metal galvanised	60 cm	10 mm	1 pack	4 / pack	1/10	

Pasture Shelter Complete Set for sheep and goats

- Mobile shelter for sheep and goats (protection against rain, wind and sun)
- Shelter dimensions: 2.75 m x 2.75 m
- tool-free and easy assembly using plug connections and wing nuts
- extremely durable and UV-stable tarpaulin, stitched at the corners
- the tarpaulin is fastened to the roof structure using leather straps or using the supplied cable ties with the portable pens





Ref. no.	Ø	€
442614	1	

(442616)



Paddock Panels



Pasture Panel

- perfect for erecting mobile and flexible fencing as well as temporary horse boxes
- also commonly used to fence off riding and training areas
- also suitable for constructing trap systems and gangways
- height of upper tube 1.6 m
- safety mounting bracket prevents animals from being injured. When landing on the panel, the animal does not fall between two panels if it slips
- made from flat oval pipe 50 x 30 mm
- clear distance between tubes 20 cm
- rapid chain fastening makes it quicker and easier to connect several panels
- very stable at light loads
- curved feet ensure excellent stability





Rapid chain fastening, hot-dip galvanised

Safety mounting bracket




curved feet ensure excellent stability




/				
F	lat	Oval	Pipe	


Ref. no.	Description	Material	Length	Height	Ø	Ħ	€
442591	Pasture Panel without gate	metal hot-dip galvanised	240 cm	170 cm	1	48	• ••
442592	Pasture Panel without gate	metal hot-dip galvanised	300 cm	170 cm	1	36	• ••
442593	Pasture Panel without gate	metal hot-dip galvanised	360 cm	170 cm	1	18	• ••

Please note separate freight costs.





442592



442593

Paddock Panels


Pasture Panel with Gate

- allows an opening to be created in the fencing
- gate width 1 m
- lock for opening and closing the fenced area

Example for mounting










Ref. no.	Description	Material	Length	Height	Ø		€	
442594	Pasture Panel with Gate	metal hot-dip galvanised	240 cm	220 cm	1	18		• •
442595	Pasture Panel with Gate	metal hot-dip galvanised	300 cm	220 cm	1	18		• •
442596	Pasture Panel with Gate	metal hot-dip galvanised	360 cm	220 cm	1	18		• •

Please note separate freight costs.








442596

Extension element

for constructing gangways and mobile treatment facilities

• potential uses, such as immunisations, ear tag control or loading and sorting the herd



442620 442621

Example for mounting

Ref. no.	Description	Material	Width	Height	Ø	€
442620	Extension element Sliding door, single	metal hot-dip galvanised	85 cm	200 cm	1	P
442621	Extension element Connector frame for panels	metal hot-dip galvanised	85 cm	186 cm	1	P P





Hay Bell for round bales

- for round bales with max. ø 160 x H 125 cm or ø 130 x H 135 cm
 shatter-proof, frost-proof plastic material with built-in UV protection
- sturdy construction
- with animal-friendly and non-damaging food openingswater-removing rain channels over the food openings
- with integrated carrying handle, suitable for front loader forks
- with integrated fixing eyelets for fixing the base to the hay bell
- Base (available separately) for dry storage of the bales; can be locked for transportation with the hay bell

14559



Technical data	14557	14558
Height	164 cm	164 cm
Exterior diameter	185 cm	185 cm
Interior diameter	160 cm	160 cm
Feed areas	5	10

Ref. no.	Colour	Suitable for			€		
14557	olive green		Cattle / Horses	16	- P		
14558	olive green		Sheep / Goats / Calves / Ponies	1 6	. •		
Ref. no.	Description	Colour	Material	suitable for	Ð	€	
14559	Ground for hay bell	olive green	Plastic UV-stabilised	14557, 14558	1		- P
14556	Ground anchor for hay bell and base			14557, 14558, 14559	1/10		. .

Please note separate freight costs.

Square hay rack Hobby

- suitable for round and rectangular bales up to 1.4 m in length or diameter
- 1 x square tubular support
- 2 sides can easily be opened for filling
- three-point attachment
- very little food loss
- supplied as a construction kit including circumferential roof edge protection, three-point safety clip
- Internal trough dimensions: approx. 1.45 x 1.45 m
- height-adjustable runners (adjustable to the animal's size)
- Material: metal hot-dip galvanised





Ref. no.	Length	Width	Height	Feed areas		€
291300	150 cm	150 cm	240 cm	8	16	. •

Please note separate freight costs.

Square hay rack Standard

- suitable for round and rectangular bales up to 1.8 m in length or diameter
- 1 x square tubular support
- 2 sides can easily be opened for filling
- three-point attachment
- very little food loss
- supplied as a construction kit including circumferential roof edge protection, three-point safety clip
- Internal trough dimensions: approx. 1.9 x 1.9 m
- Material: metal hot-dip galvanised



Circumferential roof edge protection



Three point attachment (with safety guard)





Ref. no.	Description	Length	Width	Height	Feed areas	Ø	Ħ	€	
291289	with palisade feeding grate for horses and cattle	230 cm	230 cm	250 cm	12	1	6		P
291294	with self-closing feeding grate for hornless cattle	230 cm	230 cm	250 cm	12	1	6		- P
			Æ						

Ref. no.	Description	Material	Ø		€	
291299	Self-Closing Feeding Grate single	metal hot-dip galvanised	1	6		. .

Please note separate freight costs.

Square hay rack with palisade feeding grate

- universal hay rack for horses and cattle
- suitable for round and rectangular bales up to 1.8 m in length or diameter
- extremely stable design, high material thickness, 2 square pipe beams
- 2 sides can easily be opened for filling
- height-adjustable runners (adjustable to the animal's size)
- three-point attachment
- very little food loss
- supplied as a construction kit including circumferential roof edge protection, three-point safety clip
- Internal trough dimensions: approx. 2.0 x 2.0 m
- Material: metal hot-dip galvanised



Ref. no.	Length	Width	Height	Feed areas	Ø		€	
291255	212 cm	212 cm	250 cm	12	1	6		•••
-								

Please note separate freight costs.

Square hay rack for horses with safety feeding grate

- Feed rack for horses with 12 feeding places
- suitable for round and rectangular bales up to 1.8 m in
- length or diameterextremely stable design, high material thickness, 2 square
- pipe beams
- 2 sides can easily be opened for filling
- height-adjustable runners (adjustable to the animal's size)
- three-point attachment
- very little food loss
- supplied as a construction kit including circumferential roof edge protection, three-point safety clip
- Internal trough dimensions: approx. 2.0 x 2.0 m
- Material: metal hot-dip galvanised



Ref. no.	Length	Width	Height	Feed areas		€
291256	212 cm	212 cm	250 cm	12	16	P

Please note separate freight costs.



Three point attachmentCircumferential roof edge(with safety guard)protection





Square pipe beams

When used with feeds that may attack the galvanised surface (e.g. silage), apply a protective coat of paint first.

Round hay rack with 8 feeding places

for loose feed or small high-pressure bales

palisade feeding grid • supplied as a kit • 4-part, can be transported in an estate car
outdoors or in play pens, the segments can also be used to set up wall or corner mangers • no three-point hitch • Material: metal hot-dip galvanised

Technical data	291257
Height	116 cm
Exterior diameter	150 cm
Interior diameter	132,5 cm
Feed areas	8

Ref. no.			€	
291257	1	5		• •

Please note separate freight costs.

Round hay rack with 12 feeding places

for normal and round bales

• palisade feeding grid • 3-piece • three-point attachment • includes three-point safety clip and top bar safety cap • supplied as a kit • Material: metal hot-dip galvanised

Technical data	291258
Height	116 cm
Exterior diameter	236 cm
Interior diameter	219 cm
Feed areas	12

Ref. no.	Ø		€	
291258	1	5		P.

Please note separate freight costs.

Slow Feeding Net

The net is placed over the food/bales so that the animals eat more slowly and thoroughly, helping to improve their digestion.

- reduced dust formation
- appropriate feeding
- · little food is wasted
- Material: Polypropylene



Ref. no.	Colour	Length	Width	Mesh size	Ø		€
291260	green	3,6 m	2,4 m	45 x 45 mm	1/6	48	
291261	green	3,6 m	2,4 m	100 x 100 mm	1/10	80	
291262	green	2,8 m	2,8 m	45 x 45 mm	1/6	72	
291263	green	2,8 m	2,8 m	100 x 100 mm	1/12	96	

Ref. no.	Description	Material	Length	Width	Ð	€
291295	Frame for slow feeding net	metal galvanised	1,83 m	1,83 m	1	• •





Α

Adaptor Cable 33
Additional Insulator 128
Allround Clip Insualtor 148
ALU GUARD Fence Wire 108
Angle clamp 103
Angular Steel Post 136
Anti-Theft-Box 31

В

Basic Plastic Post
BASIC Poly Wire
BASIC Rope
BASIC Tape
Battery Charger
Battery Tester
Big Euro Reel
BIG Ring Insulator 140, 141

С

c	
Cat Netting. Cavallo Tape Corner Insulator	45 23 15 32 97 97 96
Clip Insualtor Allround 1	
Clip Insualtor Profi 1 Clip Insulator 1	
Clip Insulator Easy Tape	
Clip Insulator Maxi Tape	
Closing option 1	
Combi Insulator Premium 1	
Compact Reel	
Corner insulator	
Corner insulator Super 123, 1	
Corner Solution	
Cut-Out Switch	

D

De-tensioning Set
Digital Voltmeter
Distance Insulator T-Post 121
Door for electric fence nets
Drop Handles
Dry Battery Alkaline Power Block 45
DUO Reel

Ε

E Line Cete Guttern 100
E-Line Gate System
Easy-Loop Plug Connector 112
Easy Drill EDX Ring Insulator 141
Easy Tape Clip Insulator 143
EasyNet
Eco Euro Reel
Eco Gate System
Eco Plastic Post
EconomyLine Monowire 104
Electric Cattle Gate Electro Gate
Electro Gate Electric Cattle Gate
Electro Set
Euro Cord Rope Insulator 147
Euro Reel
Euro Reel Big 59
Euro Reel Eco
Euro Rope Insulator
Euro Tape Insulator

Extension element														171
Eyelet Metal Post .														137

F

Farming Forceps Standard115Fastening Clamp153Fence-Checker49Fence Clip91, 157Fence Connector Cable54Fence Connector Cable Heart Clip55Fence Controller48Fence Power/Ground Connector Cable51Fence Starter Set T-Post118Fence Wire ALU GUARD108FenceCNTROL46FlexiGate162

G

Gate Handle
Gate Handle Premium
Gate Handle Premium Plus
Gate Handle Soft Grip
Gate Handle with Tape Connector
Gate Insulator 154, 155
Gate Insulator T-Post 123
Gate Insulator T-Post Vario
Gate Insulator Vario
Gate Insulator Vario Profi 154
Gate Lock
Gate Spring Kit
Gate System E-Line
Gate System Eco
Gear-toothed wire tensioner
Geared Reel 3:1
Ground and Fence Connector Cable
Ground Connection Cable
Ground/Support Rod
Ground/Support nou

Н

Hand Pile Driver 115 Hay Bell 172 Head Insulator T-Post 120
Head Insulator Tape/Rope Corner Solution T-Post 120
High-power on/off switch
High Voltage Cable Connector
High Voltage Underground Cable 52
High Voltage Underground Cable Premium 51
Highland Permanent Fencing Insulator 147
Hobby Square hay rack 173
Hobbyset
Hose Insulator 113

L

Insulator	40
Insulator Euro Tape 14	
Insulator Pinlock	47
Iron Wire 1	06

Κ

Kompakt Ring Insulator 141

L

Lightning Protection	56
Lightning Protection Throttle	56
Litzclip® Poly Wire Connector	6, 101
Litzclip® Poly wire cross-connector	86
Litzclip® Poly wire T-Connector	86
Litzclip [®] Repair Set	86
Litzclip® Rope Connectors	. 101
Litzclip® Tape Gate Handle Connector	. 158

М

Maxi Tape Clip Insulator
MaxiNet
Metal Battery Boxes
Metal Post T-Post 117
Modular Hoarding 168
Monowire EconomyLine
Mounting Set
Multi B 280 35
Multi Post 61

Ν

Nail Insulator	Nail Insulator																													149)
----------------	----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	-----	---

0

Octo Wood 124 Offset Pigtail Insulator 151
Offset Ring Insulator
Offset Rope Insulator 150
Offset Tape Insulator
One-Hand Drop Aid 91
Oval Fibreglass Post 129
OviNet
OviNet Profi 68

Р

Pasture gate		
Pasture Panel 170		
Pasture Shelter Complete Set		
Permanent Fencing Insulator Highland	•	147
Pile Driver		
Pinlock Insulator		
Pinlock Insulator T-Post.		
Plastic Eyelets		
Plastic Post		134
Plastic Post Basic		
Plastic Post Classic		
Plastic Post Eco		
Plastic Post Titan.		
Plastic Post Titan Plus		130
Plastic Post with Stirrup Step		130
Plastic Reel Super		. 58
Plug Connector Easy-Loop		112
Poly Wire BASIC		. 99
Poly Wire CLASSIC		. 97
Poly Wire Connector Litzclip®	j,	101
Poly wire cross-connector Litzclip [®]		. 86
Poly Wire PROFI		. 95
Poly Wire STAR		
Poly Wire Steuer		
Poly wire T-Connector Litzclip [®]		
polyamide de-tensioning insulator for steel wire		
Porcelain Corner Insulators		
Porcelain Strain Insulator		113
Portable Fence Kit for Trekking		
Post Hole Digger		
PoultryNet		
PoultryNet orange		. 82
Power Block Dry Battery Alkaline		
Premium AGM 15 Ah		
Premium AGM Battery		. 43
Premium Combi Insulator		
Premium Gate Handle 156		
Premium High Voltage Underground Cable		
Premium Horse Wire		110
Premium Plus Gate Handle		
Premium Tape/Rope Tensioner		
Profi Clip Insualtor		143
Profi Corner/Stretch Insulator	•	144
PROFI Poly Wire		
PROFI Rope		
Profi T-Post Tape Gate Insulator Set		
PROFI Tape		
Profi Tape Gate Insulator.		144
Puller		119

Q

Quick rope/poly wire connector. 102, 154, 155

R

Rabbit Netting
Recycling Post
Reel DUO
Reel Holder
Reel Super Big
Repair Set
Repair Set Litzclip®
Ring Insulator
Ring Insulator BIG 140, 141
Ring Insulator Easy Drill EDX 141
Ring Insulator Kompakt 141
Ring Insulator Super BIG
Ring Insulator T-Post 121
Ring Insulator Vario Classic
Rope / Tape Connector
Rope and Poly Wire Connectors 103
Rope BASIC
Rope CLASSIC
Rope Connecting Cable
Rope Connector
Rope Connectors
Rope Connectors Litzclip® 101
Rope Corner Insulator T-Post
Rope Insulator Euro 146
Rope Insulator Euro Cord 147
Rope Insulator T-Post 121
Rope PROFI
Rope STAR
Round Fibreglass Post
Round hay rack

S

Safety Link 101
Screw Insulator
Screw Insulator Vario Plus
Screwdriver
Sheep Netting
Shelter for Portable Pens
Signal Light
Sledge Hammer
Slit Insulators
Slow Feeding Net
Soft Grip Gate Handle
Solar Panel
Solar Set 5 Watt
Spare spring
Special Ground Rod
Special Steel Wire 106
Special Wet Rechargeable Battery 42
Spiral Ground/Retaining Anchor 38
Splint Insulator for Angled Steel Post 136
Spring Steel Post
Spring steel post with eyelets
Square hay rack 174
Square hay rack for horses
Square hay rack Hobby 173
Square hay rack Standard 173
Standard Farming Forceps 115
Standard Square hay rack
Staples
STAR Poly Wire
STAR Rope
STAR Tape
Stem Evelet Insulator 151
Steuer Poly Wire
Strain Insulator
Stranded Wire
Sun Power S 2
Sun Power S15
Sun Power S30
Sun Power S8
Super A 100 M
Super A 300
Super A 500
54pc

Super AB 250 27
Super AB 250 27 Super AB 450 digital 27
Super B 170
Super B 340
Super Big Reel
Super BIG Ring Insulator
Super Corner insulator 123, 145
Super N 10000 17
Super N 10000 D 15
Super N 1100 19
Super N 15000 17
Super N 2300 19
Super N 3500
Super N 5000
Super N 6000 D
Super NA 100 DUO
Super NA 200 DUO
Super Plastic Reel 58
Support post for pasture netting
Supporting Wheel
Swing-Through Lock

Т

-Post Distance Insulator	121
F-Post Fence Starter Set	118
-Post Gate Insulator	123
F-Post Head Insulator	
-Post Head Insulator Tape/Rope Corner Solution	120
-Post Metal Post	117
F-Post Pinlock Insulator.	
F-Post Ring Insulator	121
F-Post Rope Corner Insulator.	123
-Post Rope Insulator	121
F-Post Tape Insulator	121
F-Post Tape, Rope and Corner Insulator	
-Post Tape/Rope Corner Solution	122
F-Post Universal Clamp Set	
F-Post Universal Clip Set	119
F-Post Variable Corner Solution Set	
F-Post Vario Gate Insulator	
Fape BASIC	. 98
Tape CLASSIC	
Tape Connecting Cable	
Fape Connector.	
Tape Connector Plate	
Tape Connectors	
Tape Corner Insulator Cavallo	
Tape Gate Handle Connector Litzclip®	
Tape Gate Insulator Profi.	
Tape Gate Insulator Set Profi T-Post	
Fape Insulator T-Post.	
Fape PROFI	
Tape STAR	
Tape, Rope and Corner Insulator T-Post	122
Tape/Rope Corner Solution T-Post	122
Tape/Rope Tensioner Premium	
Temperature Equalisation Spring	
Fitan Plastic Post	
Fitan Plus Plastic Post	
FitanLight Net	
litanNet	
TopLine Horse Wire.	
Fournament / Paddock Set	. 41

U

Universal Clamp Set T-Post	119
Universal Clip Set T-Post	119

۷

Variable Corner Solution Set T-Post 1	18
Vario Classic Ring Insulator	48
Vario Gate Insulator	55
Vario Plus Screw Insulator 1	48
Vario Profi Gate Insulator 1	54
Vario Wire Dispenser	06
Vertical struts connector	85

W

Warning Sign
Wide Tape Insulator 143
Wide Tape Ring Insulator 142
WildNet 81
Wire connecting clamp 109
Wire Connectors
Wire Connectors Wire Link 109
Wire Dispenser
Wire Dispenser Vario
Wire Link Wire Connectors
Wire tensioner 114
WolfNet 141 cm
WolfNet Maxi
WolfNet Vario
Wooden Mallet 115
Wooden Post Mount

Ζ





Albert Kerbl GmbH Felizenzell 9 84428 Buchbach Germany

Telefon: +49 8086 933-100 Telefax: +49 8086 933-500 E-Mail: weidezaun@kerbl.de www.kerbl.com

Kerbl Austria Handels GmbH Wirtschaftspark 1 9130 Poggersdorf Austria

Telefon +43 4224 81555-0 Telefax +43 4224 81555-629 E-Mail order@kerbl-austria.at www.kerbl-austria.at

> We are constantly striving to improve our stock of products and keep them right up to date. We reserve the right to make design changes. The publication of this catalogue renders all previous catalogues and prices lists for these products invalid.

All prices provided are the manufacturer's recommended retail prices and are inclusive of VAT. All information is subject to typesetting and printing errors.

Price alterations and errors reserved.

Colours and designs may vary due to printing processes. Reprinting - even just of extracts - is only permitted only with prior consent.

Batteries are accessory items and are therefore not included in the equipment's scope of delivery.

You can significantly improve the tending safety of your paddock with the products listed. Local influences and conditions can affect your fence system, which is why absolute tending safety cannot be guaranteed.

The vendor offers no warranty that the fence system is secure against break-outs; in fact, the safety system should be improved with the electric fence device and corresponding accessories.

Retail only via specialist dealers.